



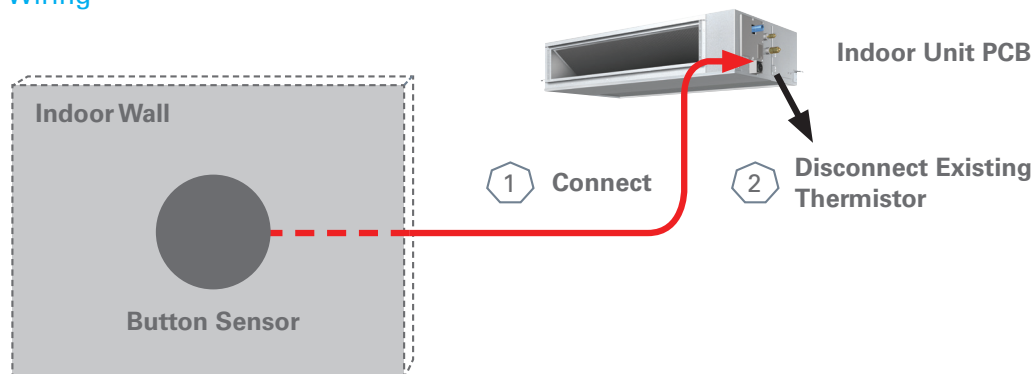
Compact and concealable room temperature measurement







The new Daikin Button Sensor Kit provides indoor temperature measurement with a compact and concealable design. It replaces the return air thermistor in the indoor unit and extends the sensing location to up to 40 feet away from the indoor unit. The surface of the button sensor is paintable to match wall color and to conceal from view.

Features

- » Extends the sensing location by replacing the return air thermistor in the indoor unit
- » Compact and concealable design
- » Paintable surface to match wall color*
- » Sensor, plenum rated cable, and wiring harness adaptors are included in the kit

Wiring



Items	Button Sensor	4-Pin 40 ft. Plenum Rated Cable	2-Pin 4 in. Harness Adaptor	3-Pin 4 in. Harness Adaptor	3-Pin 4 in. Harness Adaptor	5-Pin 4 in. Harness Adaptor
Quantity	1	1	1	1	1	1
Image						

*When painting the surface of the sensor, be sure to avoid thick/multiples coats to ensure the accuracy of the sensor.

Compatibility

Items	Indoor Unit Model
VRV and VRV LIFE	CXTQ, FXAQ, FXDQ, FXHQ, FXLQ, FXNQ, FXEQ, FXFQ, FXMQ, FXTQ, FXSQ, FXUQ, FXZQ
SkyAir	FAQ, FHQ, FCQ, FBQ, FTQ
Multi and Single Zone	FFQ, FDMQ



To learn more about the Button Sensor Kit, contact your local sales representative, or visit: www.daikincity.com or www.daikinac.com.

Additional information

Before purchasing this appliance, read important information about its estimated annual energy consumption, yearly operating cost, or energy efficiency rating that is available from your retailer. Visit www.daikincomfort.com or www.daikinac.com to learn more.

