
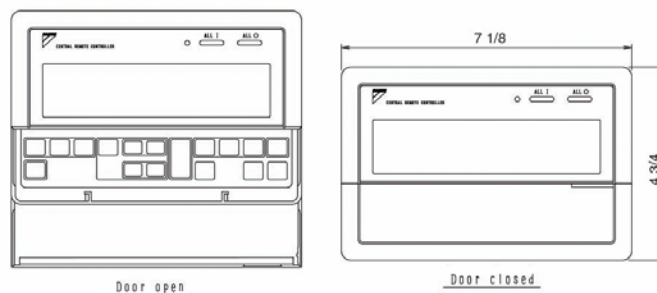


Job Name:	Location:
Purchaser:	
Engineer:	
Submitted To:	For: <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Submitted By:	Date:
Unit Designation: Schedule #:	Model No.:

For use with the following Daikin VRV Models: FXAQ; FXFQ; FXHQ; FXLQ; FXMQ; FXNQ; FXSQ; FXDQ; FXOQ
For use with the following Daikin SkyAir Models: FCQ, FHQ

FEATURES / BENEFITS

- You can connect up to 64 groups of indoor units (max. 128 units); allows you to operate or monitor ON/OFF temperature setting, etc., by zone individually or together.
- Up to 2 units are connectable within 1 system (up to 4 units in case of the double central control mode).
- Executes zone control for up to 64 zones and is designed for operation efficiency.
- Error contents are displayed in code; maintenance and inspections can be quickly carried out.
- 1 schedule timer and up to 4 unified on/off controllers can be connected to a single unit, and you can freely extend the central control system according to building size and purpose.
- Operating status indication (normal operation, alarm).
- A maximum wiring distance between a controller and any unit of 3,280 ft.
- A maximum wiring length of 6,560 ft. (including all connections).
- Applicable wiring methods include bus and star in addition to series wiring.

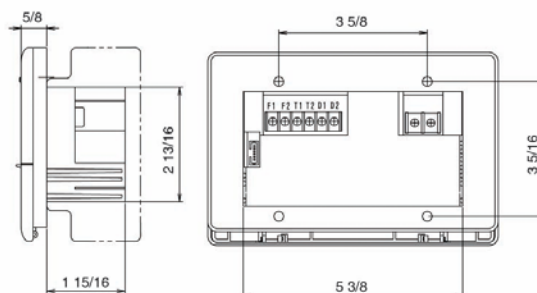

OPERATION	Start/Stop
	Operation Mode
	Temperature Setting
	60°F – 90°F Set Point Range
	Permit/Prohibit Selection
	Fan Speed
	Airflow Direction
MONITORING	Status
	Malfunction Flashing
	Malfunction Content
	Filter Sign
	Operation Mode
	Temperature Setting
	Permit/Prohibit Selection
SCHEDULING	Fan Speed
	Airflow Direction
CONTROL MANAGEMENT	8 Weekly Schedule*
	Field Setting Mode
	Group Setting
	Auto Re-Start

* using a schedule timer DST301BA61

POWER SUPPLY

Power Supply AC 100-240V ±10% 50/60hz

SPECIFICATIONS OF CORD

TYPE	TYPE
SIZE	SIZE
TOTAL LENGTH	TOTAL LENGTH