



## *Standard Efficiency Air Conditioner Direct-Drive Packaged Rooftop Unit 15-25 Ton DFC Light Commercial*

*15 - 20 Ton 11 EER / 14.2 IEER*

*25 Ton 10 EER / 13.2 IEER*



\* Complete warranty details available from your local distributor or manufacturer's representative  
or at [www.daikincomfort.com](http://www.daikincomfort.com) or [www.daikinac.com](http://www.daikinac.com)

A woman with blonde hair tied in a bun, wearing a light-colored business suit, is looking down at a clipboard she is holding. She is standing on a staircase with a metal railing. The background is slightly blurred, showing the steps of the staircase.

# Our Perfect Package:

Harnessing energy-efficient performance, proven technology, and enhanced comfort for life.

Since becoming the first company in Japan to manufacture packaged air conditioning systems, in 1951, Daikin has supported comfortable indoor living based on the strengths and technologies that have led to the growth of the company becoming one of the world's largest manufacturers of HVAC products, systems and refrigerants.

Today, as a comprehensive global manufacturer of HVAC products and systems, the Daikin brand is committed to being recognized as a truly global and excellent company capable of continually creating new value for its customers. The company plans to pursue sustainable growth and foster business operations that consistently harmonize with the goals of improving indoor comfort.


The group philosophy of the company includes:

- » Creating new value continuously for customers
- » Developing world leading energy-saving technology
- » Being a flexible and dynamic organization
- » Allowing employees to be the driving force for the success of the company
- » Fostering an atmosphere of best practices, boldness, and innovation
- » Thinking and acting globally



# Contents

|           |                               |    |
|-----------|-------------------------------|----|
| <b>2</b>  | <b>Introduction</b>           | 2  |
| <b>4</b>  | <b>Nomenclature</b>           | 4  |
| <b>5</b>  | <b>Features and Benefits</b>  | 5  |
|           | Applications                  | 8  |
|           | Serviceability                | 8  |
| <b>9</b>  | <b>Product Specifications</b> | 9  |
|           | Coil Dimensions               | 12 |
|           | AHRI Ratings                  | 12 |
|           | Sound Data                    | 12 |
| <b>13</b> | <b>Expanded Cooling Data</b>  | 13 |
| <b>19</b> | <b>Air Flow Data</b>          | 19 |
| <b>38</b> | <b>Electrical Data</b>        | 38 |
| <b>47</b> | <b>Electric Heat</b>          | 47 |
| <b>48</b> | <b>Wiring Diagrams</b>        | 48 |
| <b>58</b> | <b>Dimensional Data</b>       | 58 |
| <b>59</b> | <b>Unit Clearances</b>        | 59 |
| <b>60</b> | <b>Installation</b>           | 60 |
|           | Weights                       | 60 |

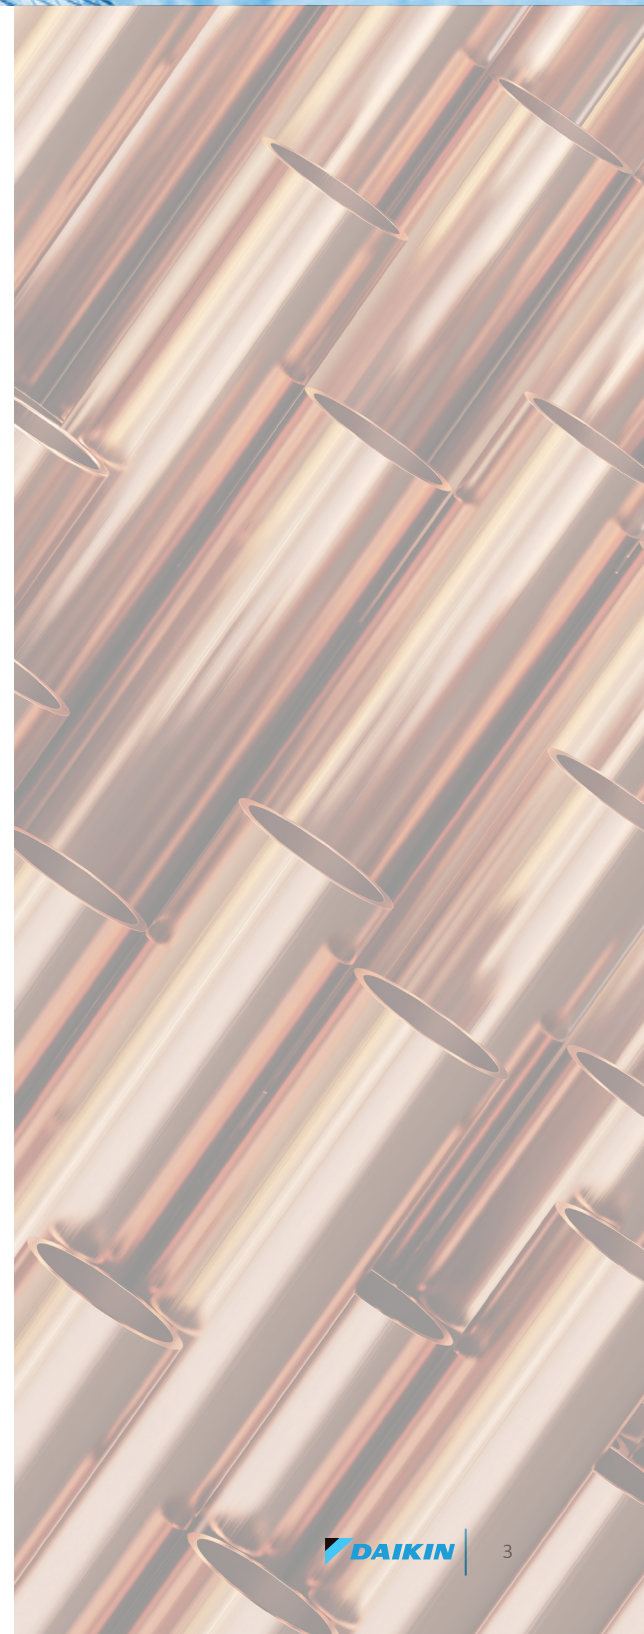

# Nomenclature

|                                                                          | D                 | F                                   | C           | 300                           | 3 | V                                                                   | 400     | C                                                   | S  | A  | X  | X  | X  | X  | X  | X  | X  | X  | A  | *  |
|--------------------------------------------------------------------------|-------------------|-------------------------------------|-------------|-------------------------------|---|---------------------------------------------------------------------|---------|-----------------------------------------------------|----|----|----|----|----|----|----|----|----|----|----|----|
|                                                                          | 1                 | 2                                   | 3           | 4,5,6                         | 7 | 8                                                                   | 9,10,11 | 12                                                  | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 |
| <b>Brand</b>                                                             | D                 | Daikin                              |             |                               |   |                                                                     |         |                                                     |    |    |    |    |    |    |    |    |    |    |    |    |
| <b>Configuration</b>                                                     | F                 | Standard Efficiency                 | R           | High Efficiency               |   |                                                                     |         |                                                     |    |    |    |    |    |    |    |    |    |    |    |    |
| <b>Application</b>                                                       | C                 | Cooling                             | G           | Gas Heat                      | H | Heat Pump                                                           |         |                                                     |    |    |    |    |    |    |    |    |    |    |    |    |
| <b>Nominal Cooling Capacity</b>                                          | 036 3 Tons        | 090 7½ Tons                         | 180 15 Tons |                               |   |                                                                     |         |                                                     |    |    |    |    |    |    |    |    |    |    |    |    |
|                                                                          | 048 4 Tons        | 102 8½ Tons                         | 240 20 Tons |                               |   |                                                                     |         |                                                     |    |    |    |    |    |    |    |    |    |    |    |    |
|                                                                          | 060 5 Tons        | 120 10 Tons                         | 300 25 Tons |                               |   |                                                                     |         |                                                     |    |    |    |    |    |    |    |    |    |    |    |    |
|                                                                          | 072 6 Tons        | 150 12½ Tons                        |             |                               |   |                                                                     |         |                                                     |    |    |    |    |    |    |    |    |    |    |    |    |
| <b>Voltage</b>                                                           | 1                 | 208-230/1/60                        | 4           | 460/3/60                      | 3 | 208-230/3/60                                                        | 7       | 575/3/60                                            |    |    |    |    |    |    |    |    |    |    |    |    |
| <b>Supply Fan/Drive Type/Motor</b>                                       | D                 | Direct Drive - Standard Static      | W           | Direct Drive - High Static    | L | Direct Drive -Medium Static                                         |         |                                                     |    |    |    |    |    |    |    |    |    |    |    |    |
| <b>Nominal Heating Capacity</b>                                          | Gas/Electric      | A/C Factory-Installed Electric Heat |             |                               |   |                                                                     |         |                                                     |    |    |    |    |    |    |    |    |    |    |    |    |
|                                                                          | 045 45,000 BTU/h  | XXX No Heat                         |             |                               |   |                                                                     |         |                                                     |    |    |    |    |    |    |    |    |    |    |    |    |
|                                                                          | 060 60,000 BTU/h  | 005 5kW                             |             |                               |   |                                                                     |         |                                                     |    |    |    |    |    |    |    |    |    |    |    |    |
|                                                                          | 070 70,000 BTU/h  | 006 5kW                             |             |                               |   |                                                                     |         |                                                     |    |    |    |    |    |    |    |    |    |    |    |    |
|                                                                          | 080 80,000 BTU/h  | 010 10 kW                           |             |                               |   |                                                                     |         |                                                     |    |    |    |    |    |    |    |    |    |    |    |    |
|                                                                          | 090 90,000 BTU/h  | 011 10 kW                           |             |                               |   |                                                                     |         |                                                     |    |    |    |    |    |    |    |    |    |    |    |    |
|                                                                          | 100 100,000 BTU/h | 015 15 kW                           |             |                               |   |                                                                     |         |                                                     |    |    |    |    |    |    |    |    |    |    |    |    |
|                                                                          | 115 115,000 BTU/h | 016 15 kW                           |             |                               |   |                                                                     |         |                                                     |    |    |    |    |    |    |    |    |    |    |    |    |
|                                                                          | 125 125,000 BTU/h | 017 15 kW                           |             |                               |   |                                                                     |         |                                                     |    |    |    |    |    |    |    |    |    |    |    |    |
|                                                                          | 130 130,000 BTU/h | 018 18 kW                           |             |                               |   |                                                                     |         |                                                     |    |    |    |    |    |    |    |    |    |    |    |    |
|                                                                          | 140 140,000 BTU/h | 020 20 kW                           |             |                               |   |                                                                     |         |                                                     |    |    |    |    |    |    |    |    |    |    |    |    |
|                                                                          | 150 150,000 BTU/h | 021 20 kW                           |             |                               |   |                                                                     |         |                                                     |    |    |    |    |    |    |    |    |    |    |    |    |
|                                                                          | 180 180,000 BTU/h | 022 20 kW                           |             |                               |   |                                                                     |         |                                                     |    |    |    |    |    |    |    |    |    |    |    |    |
|                                                                          | 210 210,000 BTU/h | 023 20 kW                           |             |                               |   |                                                                     |         |                                                     |    |    |    |    |    |    |    |    |    |    |    |    |
|                                                                          | 225 225,000 BTU/h | 030 30 kW                           |             |                               |   |                                                                     |         |                                                     |    |    |    |    |    |    |    |    |    |    |    |    |
|                                                                          | 240 240,000 BTU/h | 031 30 kW                           |             |                               |   |                                                                     |         |                                                     |    |    |    |    |    |    |    |    |    |    |    |    |
|                                                                          | 350 350,000 BTU/h | 032 30 kW                           |             |                               |   |                                                                     |         |                                                     |    |    |    |    |    |    |    |    |    |    |    |    |
|                                                                          | 400 400,000 BTU/h | 045 45kW                            |             |                               |   |                                                                     |         |                                                     |    |    |    |    |    |    |    |    |    |    |    |    |
| See product specifications for heat size(s) available for each capacity. |                   |                                     |             |                               |   |                                                                     |         |                                                     |    |    |    |    |    |    |    |    |    |    |    |    |
| <b>Refrigeration Systems</b>                                             | A                 | Single stage cooling modes          | C           | Two stage cooling modes       | F | Two stage cooling modes with Hot Gas Reheat and Low-ambient control |         |                                                     |    |    |    |    |    |    |    |    |    |    |    |    |
| <b>Heat Exchanger</b>                                                    | X                 | No options                          | A           | Standard Aluminized Exchanger | S | Stainless Steel Exchanger                                           | U       | Ultra Low NO <sub>x</sub> Stainless Steel Exchanger |    |    |    |    |    |    |    |    |    |    |    |    |
| <b>Controls</b>                                                          | A                 | Electromechanical controls          | B           | DDC w/ BACnet™ interface      |   |                                                                     |         |                                                     |    |    |    |    |    |    |    |    |    |    |    |    |

Revision Levels  
Major & Minor

X No Options

X No Options  
B Single point power connection for Power Exhaust

X No Options

Service Options

X No Option  
A Powered convenience outlet  
B Non-powered convenience outlet  
C Hinge Panels  
D Hinged Panels and Powered convenience outlet  
E Hinged Panels and non-powered convenience outlet

Electrical

X No Option  
A Non-Fused Disconnect  
B Phase Monitor  
E Non-Fused Disconnect and Phase Monitor  
C Thru-the-base connections  
E Non-Fused Disconnect and Phase Monitor  
F Non-Fused Disconnect and Thru-the-base connections  
H Phase Monitor and Thru-the-base connections  
L Non-Fused Disconnect, Thru-the-base connections and Phase Monitor

Economizer

X No Options  
A Ultra Low-Leak Downflow Economizer w/ Enthalpy Sensor  
B Low-Leak Downflow Economizer w/ Enthalpy Sensor  
E Ultra Low-Leak Downflow Economizer for DDC controls w/ Enthalpy Sensor  
G Ultra Low-Leak Downflow Economizer w/ Dry Bulb Sensor  
H Low-Leak Downflow Economizer w/ Dry Bulb Sensor  
L Ultra Low-Leak Downflow Economizer for DDC controls w/ Dry Bulb Sensor  
N Low-Leak Downflow Economizer for DDC controls w/ Enthalpy Sensor  
P Low-Leak Downflow Economizer for DDC controls w/ Dry Bulb Sensor

Coils, Hail guard

X No Options  
C Hail Guard

Sensors

X No Options  
A RA Smoke Detector  
B SA Smoke Detector  
C RA & SA Smoke Detector

| AC STOCKING MODELS     |                         |
|------------------------|-------------------------|
| New Daikin 15 – 25 Ton |                         |
| MODEL NUMBER           | CODE STRING             |
| DFC1803D000001S        | DFC1803DXXXCXAXXXXXXXAA |
| DFC1804D000001S        | DFC1804DXXXCXAXXXXXXXAA |
| DFC1807D000001S        | DFC1807DXXXCXAXXXXXXXAA |
| DFC2403D000001S        | DFC2403DXXXCXAXXXXXXXAA |
| DFC2404D000001S        | DFC2404DXXXCXAXXXXXXXAA |
| DFC2407D000001S        | DFC2407DXXXCXAXXXXXXXAA |
| DFC3003D000001S        | DFC3003DXXXCXAXXXXXXXAA |
| DFC3004D000001S        | DFC3004DXXXCXAXXXXXXXAA |
| DFC3007D000001S        | DFC3007DXXXCXAXXXXXXXAA |

Daikin Packaged Rooftop Units (RTUs) are built to perform, with features and options that help provide low installation and operation costs, superior indoor air quality, efficient operation, and longevity.

### Installation

Daikin Packaged units are designed with fast and easy installation in mind and are ideal for both new construction and retrofit projects.

### Cabinet Construction

Daikin packaged rooftop units are made with high quality galvanized steel with a powder-paint finish to provide higher corrosion resistance.

- » Unit fully insulated to prevent sweating and thermal losses, using our foil face fiberglass insulation which also omits exposed filter fibers into the airstream.
- » The full perimeter base rail is built using heavy gauge galvanized steel for a stronger structural installation. The base rails are a minimum of 3 ½" tall and include holes to allow for overhead rigging and lifting with forklifts.
- » Electrical lines can be brought through the base of the unit or through the horizontal knockout for easy installation and accessibility on the field

### Compressor

High performance, low noise scroll compressors with stage control to match the required total load for efficient part load control.

- » Resiliently factory-mounted on rubber grommets for vibration isolation.
- » Refrigeration circuits includes both high and low pressure safety switches.
- » Unit is factory charged with environmental friendly and sustainable R-410A refrigerant.
- » Two single-stage scroll compressors individually circuited for partial load applications.
- » Compressor location outside the condenser section to avoid air bypass.
- » Crankcase heaters and external thermal overload protection are also provided for compressor durability.

### Supply Fan

Supply fan will be 2 direct-drive motors. Ball bearing Direct-Drive EEM motor removes the need for belts, sheaves, bearings and lubrication.

- » Slide out forward curb fans for easy maintenance and replacement.
- » High-static drive options for applications with high airflow/static requirements.
- » Each fan assembly is dynamically trim balanced at the factory before shipment for quick start-up and efficient operation.
- » Motor with thermal overload is provided for long lasting operation.

### Coils

The indoor coil section is installed in a draw through configuration to provide better dehumidification. These coils are constructed with seamless copper tubes, mechanically bonded into aluminum plate-type fins with full drawn collars to completely cover the tubes for high operating efficiencies.

- » Coils are factory pressure tested to ensure pressure and leak integrity.
- » Coils include a Thermal Expansion Valve per circuit, high- and low pressure switches, service ports and high capacity filter drier.
- » All units use large face area outdoor coils.
- » Copper tube / aluminum fin coils on evaporator
- » Microchannel heat exchanger technology on all condenser coils for improved performance and reduced refrigerant load.



### Controls and Wiring

Packaged rooftop units come equipped with a well-organized, large, easy to use, weatherproof internal control box with easy access, for a better user experience.

- » Units are factory-wired with color-coded wires and complete 24-volt Electromechanical controls package.
- » Units include single-point power entry as standard and also available with electric heat kits if selected.
- » Terminal strips are provided as standard for easy installation and field power wiring.

### Filtration

Unit provides a draw-through filter section as standard for better air quality and long lasting component maintenance.

- » Filters installed on the units are standard off the shelf sizes for easy replacement.
- » 2" deep filters standard on all units with option for up to 4" on large chassis (15 tons and over).

### Heating Section

Wide range of electric heat selections effectively handle most comfort heating demand from morning warm-up control to full heat.

### Electric Heat

ETL approved electric heat is factory assembled, installed and tested.


- » Heating control is fully integrated into the unit's control system for quick start-up and reliable control.
- » Multi-stage capability for application flexibility.
- » Durable low watt density, nickel chromium elements provide longer life (compared to units without)..

- » Fuses are provided in each branch circuit to a maximum of 48 Amps per NEC requirements.
- » Single-point power connection reduces installation cost.
- » Operational safeties for electric heat includes automatic reset, and high temperature limit protection to prevent electric heat operation in the event of no airflow.

### Electrical

Units are completely wired and tested at the factory to provide faster commissioning and start-up.

- » Wiring complies with NEC requirements and all applicable UL standards.
- » Units are factory-wired with color-coded wires and complete 24-volt electromechanical controls package.
- » A 115 V GFI convenience outlet requiring independent power supply for the receptacle is optional.
- » An optional unit powered 20 amp 115 V convenience outlet, complete with factory mounted transformer, disconnect switch, and primary and secondary overload protection, eliminates the need to pull a separate 115 V power source.
- » Supply air fan, compressor, and condenser fan motor branch circuits have individual short circuit protection. Unit includes knockouts in the bottom of the main control panels for field wiring entrance.
- » A single-point power connection with power block is standard and a terminal strip is provided for connecting low voltage control wiring.
- » For better serviceability an optional non-fused disconnect switch is mounted inside the control panel and operated by an externally mounted handle to disconnect the electrical power at the unit.

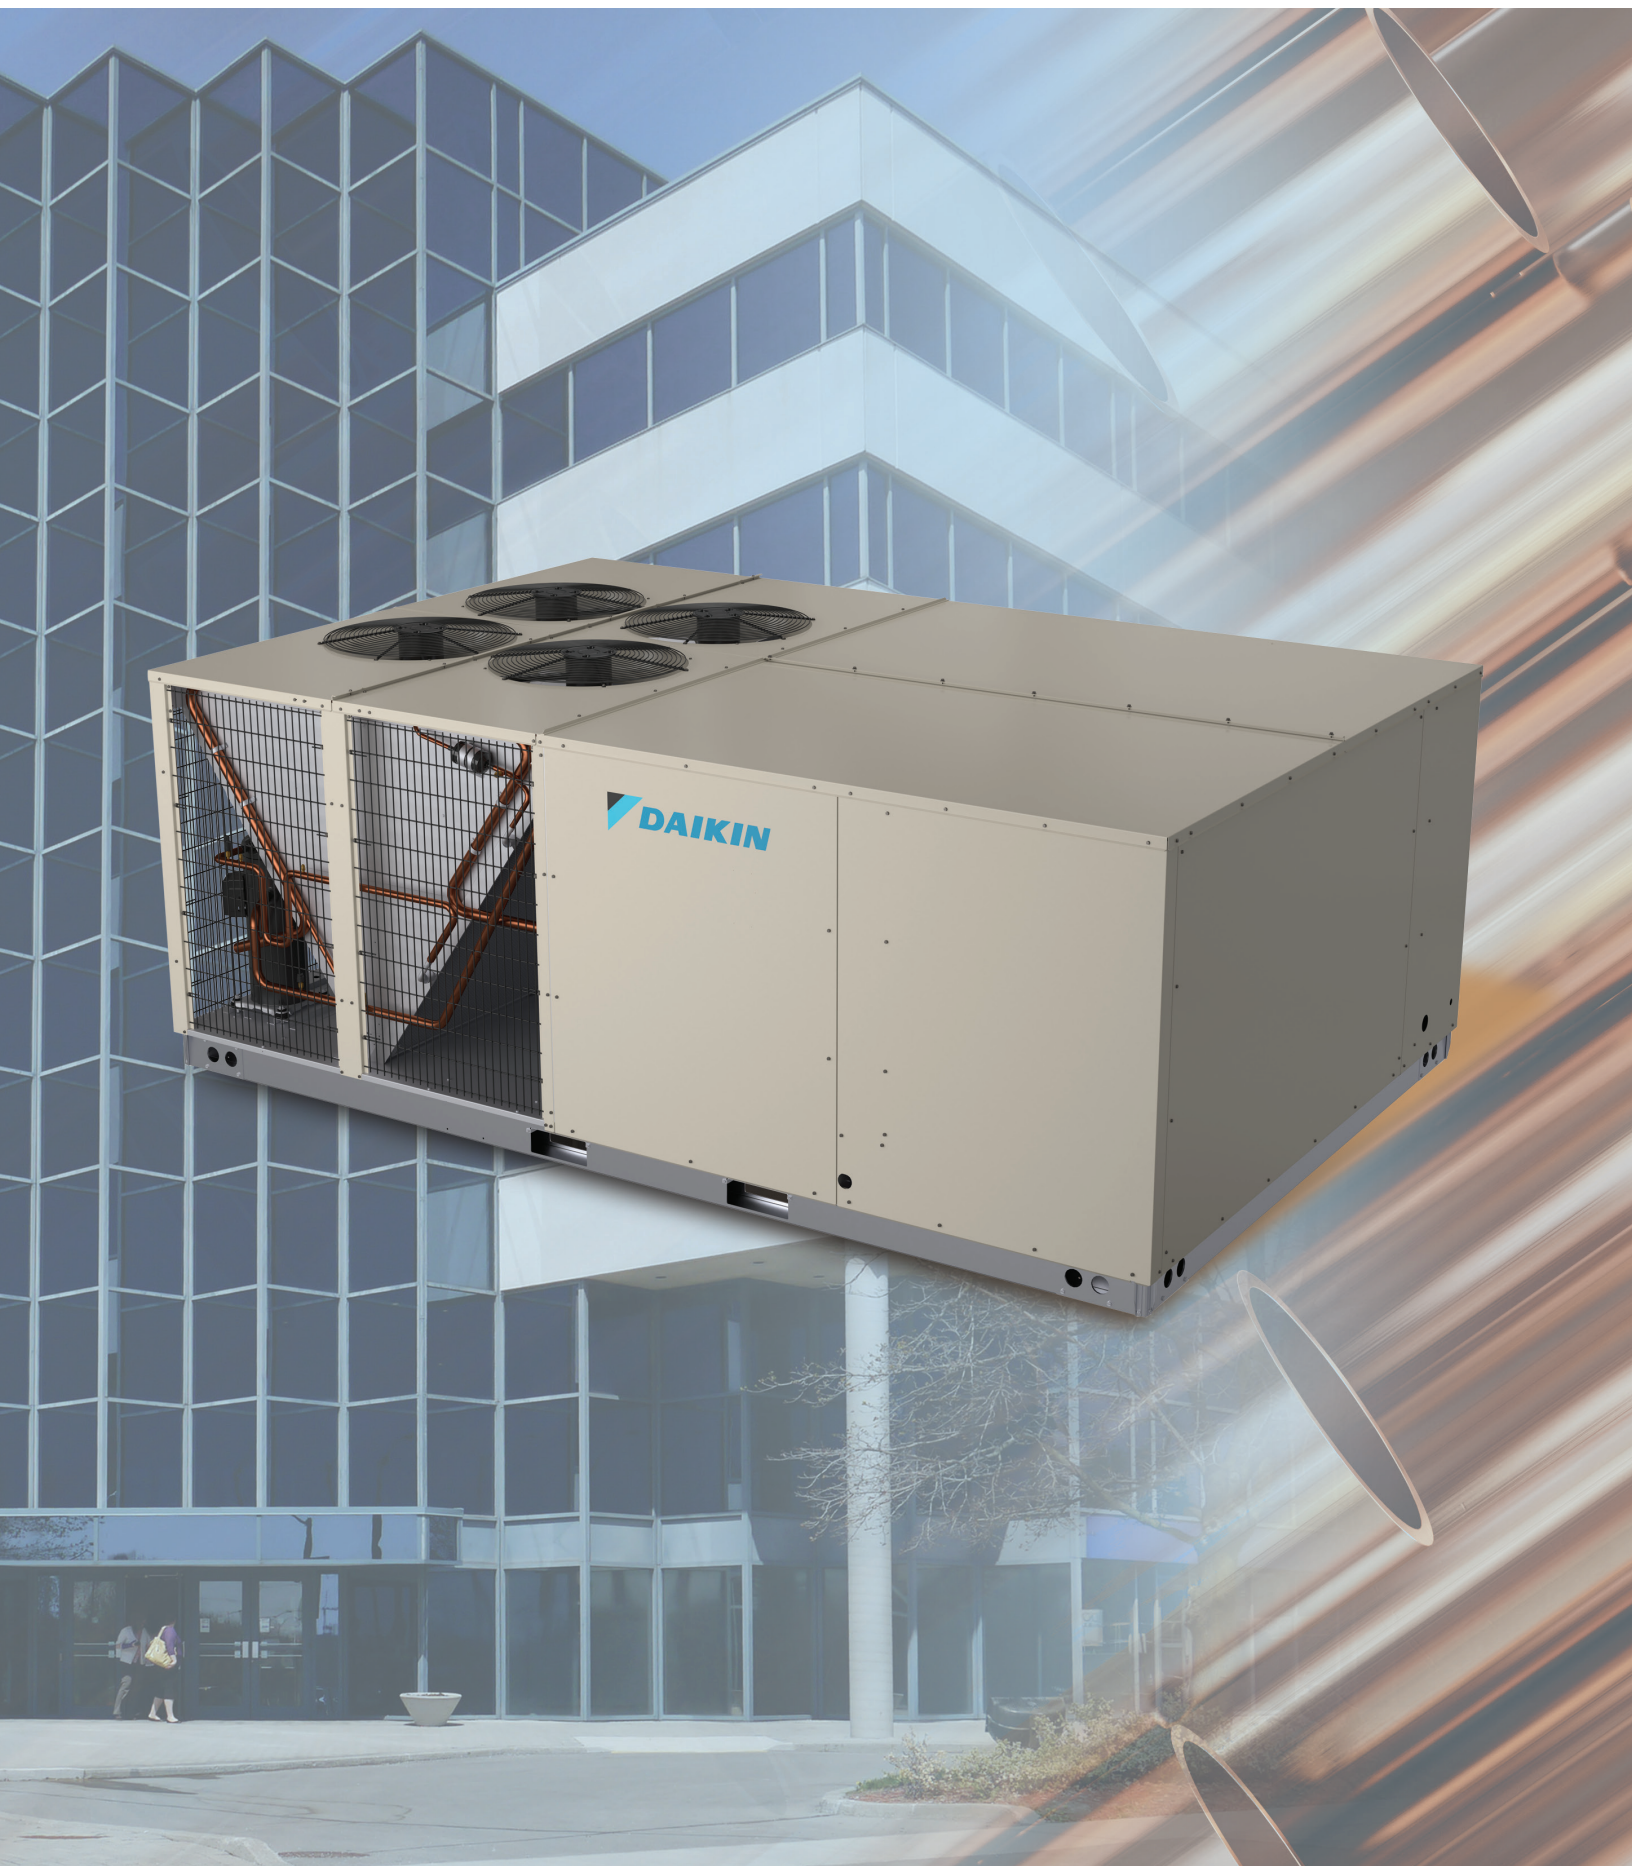

### Applications

Daikin Rooftop units are intended for comfort cooling applications in normal heating, ventilating, and air conditioning. Consult your local Daikin sales representative for applications involving operations at high ambient temperatures, high altitudes, non-cataloged voltages, or for job-specific unit selections that fall outside of the range of the catalog tables.

For proper operation, units should be rigged in accordance with instructions stated on the installation manual. Fire dampers, if required, must be installed in the ductwork according to local and/or state codes. No space is allowed for these dampers in the unit.

Follow factory check, test and start procedures explicitly to achieve satisfactory start-up and operation.

Most rooftop applications take advantage of the significant energy savings provided with economizer operation. When an economizer system is used, mechanical refrigeration is typically not required below an ambient temperature of 50°F on most cases.

### Serviceability

Daikin packaged rooftop units are built with serviceability in mind, designed to make future maintenance and service on the unit easy and accessible.

- » Our packaged rooftop units offer a slide out blower to facilitate the access and removal of the fan.
- » Independent compressor outside of the air bypass to eliminate component blockage and provide easy access.
- » Color coded wire to identify point-to-point component connections.
- » Condenser clean out from inside-out.
- » Easy access to control panel.



| PHYSICAL DATA COOLING                              |                 |                 |                 |
|----------------------------------------------------|-----------------|-----------------|-----------------|
| Model                                              | DFC1803D000001S | DFC1804D000001S | DFC1807D000001S |
| COOLING CAPACITY                                   |                 |                 |                 |
| Total BTU/H                                        | 172,000         | 172,000         | 172,000         |
| EER /IEER                                          | 11.0 / 14.2     | 11.0 / 14.2     | 11.0 / 14.2     |
| AHRI Reference #                                   | 210331718       | 210331718       | 210331718       |
| EVAPORATOR MOTOR / RTPF (ROUND TUBE PLATE FIN)     |                 |                 |                 |
| Motor Type                                         | Direct Drive    | Direct Drive    | Direct Drive    |
| External Static Pressure (ESP)                     | Standard        | Standard        | Standard        |
| Wheel Dia. X Width                                 | 15 x 15         | 15 x 15         | 15 x 15         |
| Indoor Nominal CFM                                 | 5000            | 5000            | 5000            |
| RPM                                                | 300-1600        | 300-1600        | 300-1600        |
| Indoor Horsepower                                  | 3.5             | 3.5             | 3.5             |
| Filter Size (in)                                   | 20 X 20 X 2 (8) | 20 X 20 X 2 (8) | 20 X 20 X 2 (8) |
| Drain Size (NPT)                                   | 1"              | 1"              | 1"              |
| R-410A Refrigerant Charge (oz.) (1)                | 128             | 128             | 128             |
| R-410A Refrigerant Charge (oz.) (2)                | 109             | 109             | 109             |
| Evaporator Coil Face Area (ft <sup>2</sup> )       | 21.69           | 21.69           | 21.69           |
| Rows Deep/ Fins per Inch                           | 2/18            | 2/18            | 2/18            |
| CONDENSER FAN / MCHX (MICROCHANNEL HEAT EXCHANGER) |                 |                 |                 |
| Quantity of Condenser Fan Motors                   | 3               | 3               | 3               |
| RPM (High/Low stage)                               | 1122            | 1050            | 1050            |
| Outdoor Horsepower                                 | 1/3             | 1/3             | 1/3             |
| Fan Diameter/ # Fan Blades                         | 22 / 3          | 22 / 3          | 22 / 3          |
| Face Area (ft <sup>2</sup> )                       | 25.7            | 25.7            | 25.7            |
| Rows Deep / Fins per Inch                          | 1/23            | 1/23            | 1/23            |
| COMPRESSOR                                         |                 |                 |                 |
| Quantity / Type / Stages per Compression           | 2 / Scroll / 1  | 2 / Scroll / 1  | 2 / Scroll / 1  |
| Compressor RLA / LRA                               | 25.0 / 164.0    | 12.2 / 100.0    | 10.0 / 78.0     |
| ELECTRICAL DATA                                    |                 |                 |                 |
| Voltage-Phase-Frequency                            | 208/230-3-60    | 460-3-60        | 575-3-60        |
| Indoor Blower FLA                                  | 10.9            | 7.2             | 5               |
| Max External Static (In. W.C.)                     | 1.2             | 1.2             | 1.2             |
| Outdoor Fan FLA                                    | 2               | 0.85            | 0.67            |
| Min. Circuit Ampacity <sup>1</sup>                 | 84/84           | 44.4            | 32.2            |
| Max. Overcurrent Protection (A) <sup>2</sup>       | 100/100         | 50              | 40              |
| Power Supply Conduit Hole Dia. (in)                | 2.5             | 2.5             | 2.5             |
| Low-Voltage Conduit Hole Dia. (in)                 | 0.5             | 0.5             | 0.5             |
| OPERATING WEIGHT (LBS.)                            |                 |                 |                 |
|                                                    | 1724            | 1724            | 1724            |
| SHIPPING WEIGHT (LBS.)                             |                 |                 |                 |
|                                                    | 1839            | 1839            | 1839            |

<sup>1</sup> Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.

<sup>2</sup> May use fuses or HACR-type circuit breakers of the same size as noted.

Note: Always check the S&R plate for electrical data on the unit being installed.

| PHYSICAL DATA COOLING                              |                 |                 |                 |
|----------------------------------------------------|-----------------|-----------------|-----------------|
| Model                                              | DFC2403D000001S | DFC2404D000001S | DFC2407D000001S |
| COOLING CAPACITY                                   |                 |                 |                 |
| Total BTU/H                                        | 230,000         | 230,000         | 230,000         |
| EER /IEER                                          | 11.0 / 14.2     | 11.0 / 14.2     | 11.0 / 14.2     |
| AHRI Reference #                                   | 210331719       | 210331719       | 210331719       |
| EVAPORATOR MOTOR / RTPF (ROUND TUBE PLATE FIN)     |                 |                 |                 |
| Motor Type                                         | Direct Drive    | Direct Drive    | Direct Drive    |
| External Static Pressure (ESP)                     | Standard        | Standard        | Standard        |
| Wheel Dia. X Width                                 | 15 x 15         | 15 x 15         | 15 x 15         |
| Indoor Nominal CFM                                 | 6500            | 6500            | 6500            |
| RPM                                                | 300-1600        | 300-1600        | 300-1600        |
| Indoor Horsepower                                  | 3.5             | 3.5             | 3.5             |
| Filter Size (in)                                   | 20 X 20 X 2 (8) | 20 X 20 X 2 (8) | 20 X 20 X 2 (8) |
| Drain Size (NPT)                                   | 1"              | 1"              | 1"              |
| R-410A Refrigerant Charge (oz.) (1)                | 186             | 186             | 186             |
| R-410A Refrigerant Charge (oz.) (2)                | 165             | 165             | 165             |
| Evaporator Coil Face Area (ft²)                    | 21.69           | 21.69           | 21.69           |
| Rows Deep/ Fins per Inch                           | 4/18            | 4/18            | 4/18            |
| CONDENSER FAN / MCHX (MICROCHANNEL HEAT EXCHANGER) |                 |                 |                 |
| Quantity of Condenser Fan Motors                   | 4               | 4               | 4               |
| RPM (High/Low stage)                               | 1130            | 1115            | 1075            |
| Outdoor Horsepower                                 | 1/2             | 1/2             | 1/2             |
| Fan Diameter/ # Fan Blades                         | 22 / 3          | 22 / 3          | 22 / 3          |
| Face Area (ft²)                                    | 25.7            | 25.7            | 25.7            |
| Rows Deep / Fins per Inch                          | 1/23            | 1/23            | 1/23            |
| COMPRESSOR                                         |                 |                 |                 |
| Quantity / Type / Stages per Compression           | 2 / Scroll / 1  | 2 / Scroll / 1  | 2 / Scroll / 1  |
| Compressor RLA / LRA                               | 28.2 / 240      | 16.4 / 130.0    | 12.6 / 93.7     |
| ELECTRICAL DATA                                    |                 |                 |                 |
| Voltage-Phase-Frequency                            | 208/230-3-60    | 460-3-60        | 575-3-60        |
| Indoor Blower FLA                                  | 10.9            | 7.2             | 5               |
| Max External Static (In. W.C.)                     | 1.2             | 1.2             | 1.2             |
| Outdoor Fan FLA                                    | 2.7             | 1.4             | 1               |
| Min. Circuit Ampacity <sup>1</sup>                 | 96.1/96.1       | 53.2            | 39.4            |
| Max. Overcurrent Protection (A) <sup>2</sup>       | 110/110         | 110/110         | 70              |
| Power Supply Conduit Hole Dia. (in)                | 2.5             | 2.5             | 2.5             |
| Low-Voltage Conduit Hole Dia. (in)                 | 0.5             | 0.5             | 0.5             |
| OPERATING WEIGHT (LBS.)                            |                 |                 |                 |
|                                                    | 1993            | 1993            | 1993            |
| SHIPPING WEIGHT (LBS.)                             |                 |                 |                 |
|                                                    | 2108            | 2108            | 2108            |

<sup>1</sup> Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.

<sup>2</sup> May use fuses or HACR-type circuit breakers of the same size as noted.

Note: Always check the S&amp;R plate for electrical data on the unit being installed.

| PHYSICAL DATA COOLING                              |                 |                 |                 |
|----------------------------------------------------|-----------------|-----------------|-----------------|
| Model                                              | DFC3003D000001S | DFC3004D000001S | DFC3007D000001S |
| COOLING CAPACITY                                   |                 |                 |                 |
| Total BTU/H                                        | 290,000         | 290,000         | 290,000         |
| EER / IEER                                         | 10.0 / 13.0     | 10.0 / 13.0     | 10.0 / 13.0     |
| AHRI Reference #                                   | 210331720       | 210331720       | 210331720       |
| EVAPORATOR MOTOR / RTPF (ROUND TUBE PLATE FIN)     |                 |                 |                 |
| Motor Type                                         | Direct Drive    | Direct Drive    | Direct Drive    |
| External Static Pressure (ESP)                     | Standard        | Standard        | Standard        |
| Wheel Dia. X Width                                 | 15 x 15         | 15 x 15         | 15 x 15         |
| Indoor Nominal CFM                                 | 8200            | 8200            | 8200            |
| RPM                                                | 300-1600        | 300-1600        | 300-1600        |
| Indoor Horsepower                                  | 5               | 5               | 5               |
| Filter Size (in)                                   | 20 X 20 X 2 (8) | 20 X 20 X 2 (8) | 20 X 20 X 2 (8) |
| Drain Size (NPT)                                   | 1"              | 1"              | 1"              |
| R-410A Refrigerant Charge (oz.) (1)                | 222             | 222             | 222             |
| R-410A Refrigerant Charge (oz.) (2)                | 207             | 207             | 207             |
| Evaporator Coil Face Area (ft <sup>2</sup> )       | 21.69           | 21.69           | 21.69           |
| Rows Deep/ Fins per Inch                           | 4/18            | 4/18            | 4/18            |
| CONDENSER FAN / MCHX (MICROCHANNEL HEAT EXCHANGER) |                 |                 |                 |
| Quantity of Condenser Fan Motors                   | 5               | 5               | 5               |
| RPM (High/Low stage)                               | 1130            | 1115            | 1075            |
| Outdoor Horsepower                                 | 1/2             | 1/2             | 1/2             |
| Fan Diameter/ # Fan Blades                         | 22 / 3          | 22 / 3          | 22 / 3          |
| Face Area (ft <sup>2</sup> )                       | 25.7            | 25.7            | 25.7            |
| Rows Deep / Fins per Inch                          | 1/23            | 1/23            | 1/23            |
| COMPRESSOR                                         |                 |                 |                 |
| Quantity / Type / Stages per Compression           | 2 / Scroll / 1  | 2 / Scroll / 1  | 2 / Scroll / 1  |
| Compressor RLA / LRA                               | 48.1 / 245      | 18.6 / 125      | 14.7 / 100.0    |
| ELECTRICAL DATA                                    |                 |                 |                 |
| Voltage-Phase-Frequency                            | 208/230-3-60    | 460-3-60        | 575-3-60        |
| Indoor Blower FLA                                  | 14.5            | 10.6            | 7.2             |
| Max External Static (In. W.C.)                     | 1.2             | 1.2             | 1.2             |
| Outdoor Fan FLA                                    | 2.7             | 1.4             | 1               |
| Min. Circuit Ampacity <sup>1</sup>                 | 151/151         | 70              | 52.6            |
| Max. Overcurrent Protection (A) <sup>2</sup>       | 50              | 80              | 60              |
| Power Supply Conduit Hole Dia. (in)                | 2.5             | 2.5             | 2.5             |
| Low-Voltage Conduit Hole Dia. (in)                 | 0.5             | 0.5             | 0.5             |
| OPERATING WEIGHT (LBS.)                            |                 |                 |                 |
|                                                    | 2083            | 2083            | 2083            |
| SHIPPING WEIGHT (LBS.)                             |                 |                 |                 |
|                                                    | 2198            | 2198            | 2198            |

<sup>1</sup> Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.

<sup>2</sup> May use fuses or HACR-type circuit breakers of the same size as noted.

Note: Always check the S&R plate for electrical data on the unit being installed.

## Coil Dimensions

| MODEL | SIZE | FIN HEIGHT IN. | FIN LENGTH IN. |
|-------|------|----------------|----------------|
| DFC   | 15   | 40             | 78.092         |
| DFC   | 20   | 40             | 78.092         |
| DFC   | 25   | 40             | 78.092         |

## AHRI Ratings

| MODEL           | CAPACITY | EER   | IEER |
|-----------------|----------|-------|------|
| DFC1803D000001S | 172,000  | 11.0  | 14.2 |
| DFC1804D000001S | 172,000  | 11.0  | 14.2 |
| DFC1807D000001S | 172,000  | 11.0  | 14.2 |
| DFC2403D000001S | 230,000  | 11.0  | 14.2 |
| DFC2404D000001S | 230,000  | 11.0  | 14.2 |
| DFC2407D000001S | 230,000  | 11.0  | 14.2 |
| DFC3003D000001S | 290,000  | 10.00 | 13.2 |
| DFC3004D000001S | 290,000  | 10.00 | 13.2 |
| DFC3007D000001S | 290,000  | 10.00 | 13.2 |

## Sound Data

| STATIC PRESSURE | Component | A-Weighted | 63   | 125  | 250  | 500  | 1000 | 2000 | 4000 | 8000 |  |
|-----------------|-----------|------------|------|------|------|------|------|------|------|------|--|
| STD             | Discharge | 79.1       | 90.5 | 82.3 | 79.7 | 78.7 | 73.0 | 67.6 | 64.4 | 53.7 |  |
|                 | Inlet     | 78.5       | 93.0 | 87.3 | 80.9 | 75.1 | 72.2 | 67.6 | 64.4 | 53.7 |  |
| HIGH            | Discharge | 84.6       | 91.4 | 87.3 | 86.1 | 84.1 | 78.7 | 73.4 | 69.8 | 60.0 |  |
|                 | Inlet     | 76.9       | 91.6 | 86.6 | 84.1 | 70.9 | 66.5 | 60.3 | 58.7 | 49.7 |  |
|                 | Outdoor   | 80.4       | 99.9 | 86.2 | 78.7 | 75.3 | 74.5 | 72.3 | 69.3 | 63.1 |  |

| STATIC PRESSURE | Component | A-Weighted | 63    | 125  | 250  | 500  | 1000 | 2000 | 4000 | 8000 |  |
|-----------------|-----------|------------|-------|------|------|------|------|------|------|------|--|
| STD             | Discharge | 79.6       | 87.9  | 81.7 | 81.0 | 79.0 | 74.0 | 67.4 | 65.0 | 55.7 |  |
|                 | Inlet     | 70.3       | 89.7  | 81.7 | 74.8 | 62.4 | 58.7 | 54.5 | 53.6 | 47.2 |  |
| HIGH            | Discharge | 84.6       | 83.5  | 84.9 | 84.4 | 83.8 | 79.9 | 73.4 | 70.1 | 62.6 |  |
|                 | Inlet     | 72.3       | 82.1  | 79.3 | 75.0 | 71.2 | 64.5 | 61.6 | 59.1 | 51.9 |  |
|                 | Outdoor   | 92.1       | 109.4 | 96.5 | 96.5 | 87.7 | 84.3 | 81.2 | 75.0 | 68.7 |  |

| STATIC PRESSURE | Component | A-Weighted | 63    | 125  | 250  | 500  | 1000 | 2000 | 4000 | 8000 |  |
|-----------------|-----------|------------|-------|------|------|------|------|------|------|------|--|
| STD             | Discharge | 86.4       | 85.7  | 87.4 | 88.4 | 85.6 | 81.2 | 74.5 | 70.5 | 61.1 |  |
|                 | Inlet     | 74.4       | 88.1  | 82.8 | 81.4 | 68.1 | 66.2 | 59.1 | 56.1 | 46.5 |  |
| HIGH            | Discharge | 86.5       | 89.7  | 88.3 | 88.0 | 85.3 | 81.7 | 75.4 | 71.0 | 61.7 |  |
|                 | Inlet     | 76.0       | 89.8  | 87.4 | 80.0 | 69.7 | 68.3 | 61.7 | 58.0 | 48.6 |  |
|                 | Outdoor   | 91.3       | 107.7 | 94.7 | 92.5 | 87.9 | 85.2 | 82.5 | 78.3 | 68.7 |  |

dB - decibel

<sup>1</sup> Indoor sound data is measured in accordance with AHRI 260. Outdoor sound is measured in accordance with AHRI 370

<sup>2</sup> Measurements are expressed in terms of sound power. Do not compare these values to sound pressure values because sound pressure depends on specific environment factors which normally do not match individual applications. Sound power values are independent of the environment and therefore more accurate.

<sup>3</sup> A-weighted sound ratings filter out high and very low frequencies, to better approximate the response of "average" human ear. A-weighted measurements for Daikin units are taken in accordance with AHRI standard 260 for the indoor sound and AHRI 370 for the outdoor sound.

|      |            | Outdoor Ambient Temperature                |         |         |         |         |         |         |         |         |         |         |         |                                                                                |         |         |         |         |         |         |         |         |         |         |         |
|------|------------|--------------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|--------------------------------------------------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
|      |            | 65                                         |         |         |         | 75      |         |         |         | 85      |         |         |         | 95                                                                             |         |         |         | 105     |         |         |         | 115     |         |         |         |
| IDB  | Airflow    | 59                                         | 63      | 67      | 71      | 59      | 63      | 67      | 71      | 59      | 63      | 67      | 71      | 59                                                                             | 63      | 67      | 71      | 59      | 63      | 67      | 71      | 59      | 63      | 67      | 71      |
| 4500 | Capacity   | 175,388                                    | 177,859 | 183,087 | -       | 173,821 | 176,293 | 181,521 | -       | 169,252 | 171,724 | 176,951 | -       | 161,390                                                                        | 163,862 | 169,089 | -       | 151,782 | 154,254 | 159,481 | -       | 143,011 | 145,482 | 150,710 | -       |
|      | S/T        | 0.59                                       | 0.52    | 0.39    | -       | 0.59    | 0.52    | 0.39    | -       | 0.62    | 0.54    | 0.42    | -       | 0.64                                                                           | 0.56    | 0.43    | -       | 0.66    | 0.58    | 0.46    | -       | 0.71    | 0.63    | 0.50    | -       |
|      | Evap dT    | 20.37                                      | 18.47   | 14.91   | -       | 20.32   | 18.41   | 14.86   | -       | 20.59   | 18.68   | 15.12   | -       | 20.30                                                                          | 18.39   | 14.84   | -       | 20.05   | 18.14   | 14.58   | -       | 21.24   | 19.33   | 15.78   | -       |
|      | Pr Suc     | 111                                        | 113     | 116     | -       | 118     | 119     | 122     | -       | 124     | 125     | 128     | -       | 129                                                                            | 130     | 133     | -       | 134     | 135     | 138     | -       | 140     | 141     | 144     | -       |
|      | Pr Dis     | 268                                        | 269     | 271     | -       | 310     | 311     | 313     | -       | 354     | 355     | 357     | -       | 401                                                                            | 403     | 404     | -       | 453     | 454     | 456     | -       | 507     | 508     | 510     | -       |
|      | TotalPower | 10,925                                     | 10,914  | 10,890  | -       | 12,346  | 12,334  | 12,310  | -       | 13,931  | 13,920  | 13,896  | -       | 15,647                                                                         | 15,635  | 15,611  | -       | 17,563  | 17,552  | 17,528  | -       | 19,812  | 19,801  | 19,777  | -       |
| 5010 | Capacity   | 177,290                                    | 179,762 | 184,989 | -       | 175,724 | 178,195 | 183,423 | -       | 171,154 | 173,626 | 178,853 | -       | 163,292                                                                        | 165,764 | 170,991 | -       | 153,684 | 156,156 | 161,383 | -       | 144,913 | 147,385 | 152,612 | -       |
|      | S/T        | 0.63                                       | 0.56    | 0.43    | -       | 0.64    | 0.57    | 0.44    | -       | 0.66    | 0.59    | 0.46    | -       | 0.68                                                                           | 0.61    | 0.48    | -       | 0.70    | 0.63    | 0.50    | -       | 0.75    | 0.68    | 0.55    | -       |
|      | Evap dT    | 19.45                                      | 17.55   | 13.99   | -       | 19.40   | 17.49   | 13.94   | -       | 19.67   | 17.76   | 14.20   | -       | 19.38                                                                          | 17.48   | 13.92   | -       | 19.13   | 17.22   | 13.66   | -       | 20.32   | 18.41   | 14.86   | -       |
|      | Pr Suc     | 113                                        | 114     | 117     | -       | 119     | 121     | 124     | -       | 125     | 127     | 130     | -       | 130                                                                            | 132     | 135     | -       | 135     | 137     | 140     | -       | 141     | 143     | 146     | -       |
|      | Pr Dis     | 269                                        | 271     | 272     | -       | 311     | 313     | 315     | -       | 356     | 357     | 359     | -       | 403                                                                            | 404     | 406     | -       | 454     | 456     | 457     | -       | 509     | 510     | 512     | -       |
|      | TotalPower | 10,984                                     | 10,973  | 10,949  | -       | 12,404  | 12,393  | 12,369  | -       | 13,990  | 13,979  | 13,954  | -       | 15,705                                                                         | 15,694  | 15,670  | -       | 17,622  | 17,611  | 17,587  | -       | 19,871  | 19,860  | 19,836  | -       |
| 6000 | Capacity   | 181,904                                    | 184,376 | 189,603 | -       | 180,338 | 182,809 | 188,037 | -       | 175,768 | 178,240 | 183,467 | -       | 167,906                                                                        | 170,378 | 175,605 | -       | 158,298 | 160,770 | 165,997 | -       | 149,527 | 151,999 | 157,226 | -       |
|      | S/T        | 0.67                                       | 0.60    | 0.47    | -       | 0.68    | 0.61    | 0.48    | -       | 0.70    | 0.63    | 0.50    | -       | 0.72                                                                           | 0.65    | 0.52    | -       | 0.74    | 0.67    | 0.54    | -       | 1.00    | 0.72    | 0.59    | -       |
|      | Evap dT    | 17.97                                      | 16.07   | 12.51   | -       | 17.92   | 16.02   | 12.46   | -       | 18.19   | 16.28   | 12.73   | -       | 17.90                                                                          | 16.00   | 12.44   | -       | 17.65   | 15.74   | 12.18   | -       | 18.84   | 16.94   | 13.38   | -       |
|      | Pr Suc     | 116                                        | 117     | 120     | -       | 122     | 124     | 127     | -       | 128     | 130     | 133     | -       | 133                                                                            | 135     | 138     | -       | 138     | 140     | 142     | -       | 144     | 146     | 149     | -       |
|      | Pr Dis     | 273                                        | 274     | 276     | -       | 315     | 316     | 318     | -       | 359     | 360     | 362     | -       | 407                                                                            | 408     | 410     | -       | 458     | 459     | 461     | -       | 513     | 514     | 516     | -       |
|      | TotalPower | 11,078                                     | 11,067  | 11,043  | -       | 12,499  | 12,487  | 12,463  | -       | 14,084  | 14,073  | 14,048  | -       | 15,799                                                                         | 15,788  | 15,764  | -       | 17,716  | 17,705  | 17,681  | -       | 19,965  | 19,954  | 19,930  | -       |
| 4500 | Capacity   | 175,490                                    | 177,961 | 183,189 | 191,174 | 173,923 | 176,395 | 181,623 | 189,608 | 169,354 | 171,826 | 177,053 | 185,038 | 161,492                                                                        | 163,964 | 169,191 | 177,176 | 151,884 | 154,356 | 159,583 | 167,568 | 143,113 | 145,584 | 150,812 | 158,797 |
|      | S/T        | 0.71                                       | 0.64    | 0.51    | 0.37    | 0.72    | 0.64    | 0.51    | 0.38    | 0.74    | 0.67    | 0.54    | 0.40    | 0.76                                                                           | 0.69    | 0.56    | 0.42    | 1.00    | 0.71    | 0.58    | 0.44    | 1.00    | 0.76    | 0.63    | 0.49    |
|      | Evap dT    | 24.56                                      | 22.66   | 19.10   | 15.41   | 24.51   | 22.60   | 19.05   | 15.36   | 24.78   | 22.87   | 19.31   | 15.63   | 24.49                                                                          | 22.58   | 19.03   | 15.34   | 24.23   | 22.33   | 18.77   | 15.09   | 25.43   | 23.52   | 19.96   | 16.28   |
|      | Pr Suc     | 111                                        | 113     | 116     | 120     | 118     | 120     | 122     | 127     | 124     | 125     | 128     | 133     | 129                                                                            | 130     | 133     | 138     | 134     | 135     | 138     | 143     | 140     | 142     | 144     | 149     |
|      | Pr Dis     | 268                                        | 269     | 271     | 275     | 310     | 311     | 313     | 318     | 354     | 355     | 357     | 362     | 402                                                                            | 403     | 405     | 409     | 453     | 454     | 456     | 461     | 508     | 509     | 511     | 515     |
|      | TotalPower | 10,916                                     | 10,905  | 10,881  | 10,989  | 12,336  | 12,325  | 12,301  | 12,410  | 13,922  | 13,911  | 13,886  | 13,995  | 15,637                                                                         | 15,626  | 15,602  | 15,711  | 17,554  | 17,543  | 17,519  | 17,627  | 19,803  | 19,792  | 19,768  | 19,876  |
| 75   | Capacity   | 177,392                                    | 179,864 | 185,091 | 193,076 | 175,826 | 178,297 | 183,525 | 191,510 | 171,256 | 173,728 | 178,955 | 186,940 | 163,394                                                                        | 165,866 | 171,093 | 179,078 | 153,786 | 156,258 | 161,485 | 169,470 | 145,015 | 147,487 | 152,714 | 160,699 |
|      | S/T        | 0.75                                       | 0.68    | 0.55    | 0.42    | 0.76    | 0.69    | 0.56    | 0.42    | 0.78    | 0.71    | 0.58    | 0.45    | 0.80                                                                           | 0.73    | 0.60    | 0.47    | 1.00    | 0.75    | 0.62    | 0.49    | 1.00    | 0.80    | 0.67    | 0.54    |
|      | Evap dT    | 23.64                                      | 21.74   | 18.18   | 14.49   | 23.59   | 21.68   | 18.13   | 14.44   | 23.86   | 21.95   | 18.39   | 14.71   | 23.57                                                                          | 21.66   | 18.11   | 14.42   | 23.32   | 21.41   | 17.85   | 14.17   | 24.51   | 22.60   | 19.05   | 15.36   |
|      | Pr Suc     | 113                                        | 114     | 117     | 122     | 119     | 121     | 124     | 128     | 125     | 127     | 130     | 134     | 130                                                                            | 132     | 135     | 139     | 135     | 137     | 140     | 144     | 141     | 143     | 146     | 150     |
|      | Pr Dis     | 270                                        | 271     | 273     | 277     | 312     | 313     | 315     | 319     | 356     | 357     | 359     | 364     | 403                                                                            | 405     | 406     | 411     | 455     | 456     | 458     | 462     | 509     | 511     | 512     | 517     |
|      | TotalPower | 10,975                                     | 10,964  | 10,940  | 11,048  | 12,395  | 12,384  | 12,360  | 12,468  | 13,981  | 13,969  | 13,945  | 14,054  | 15,696                                                                         | 15,685  | 15,661  | 15,769  | 17,613  | 17,602  | 17,577  | 17,686  | 19,862  | 19,851  | 19,826  | 19,935  |
| 6000 | Capacity   | 182,006                                    | 184,478 | 189,705 | 197,690 | 180,440 | 182,911 | 188,139 | 196,124 | 175,870 | 178,342 | 183,569 | 191,554 | 168,008                                                                        | 170,480 | 175,707 | 183,692 | 158,400 | 160,872 | 166,099 | 174,084 | 149,629 | 152,100 | 157,328 | 165,313 |
|      | S/T        | 0.79                                       | 0.72    | 0.59    | 0.46    | 0.80    | 0.73    | 0.60    | 0.46    | 0.82    | 0.75    | 0.62    | 0.49    | 1.00                                                                           | 0.77    | 0.64    | 0.51    | 1.00    | 0.79    | 0.66    | 0.53    | 1.00    | 0.84    | 0.71    | 0.58    |
|      | Evap dT    | 22.16                                      | 20.26   | 16.70   | 13.01   | 22.11   | 20.21   | 16.65   | 12.96   | 22.38   | 20.47   | 16.92   | 13.23   | 22.09                                                                          | 20.19   | 16.63   | 12.94   | 21.84   | 19.93   | 16.37   | 12.69   | 23.03   | 21.12   | 17.57   | 13.88   |
|      | Pr Suc     | 116                                        | 117     | 120     | 125     | 122     | 124     | 127     | 131     | 128     | 130     | 133     | 137     | 133                                                                            | 135     | 138     | 142     | 138     | 140     | 142     | 147     | 144     | 146     | 149     | 153     |
|      | Pr Dis     | 273                                        | 274     | 276     | 281     | 315     | 316     | 318     | 323     | 359     | 361     | 362     | 367     | 407                                                                            | 408     | 410     | 415     | 458     | 459     | 461     | 466     | 513     | 514     | 516     | 521     |
|      | TotalPower | 11,069                                     | 11,058  | 11,034  | 11,142  | 12,489  | 12,478  | 12,454  | 12,563  | 14,075  | 14,063  | 14,039  | 14,148  | 15,790                                                                         | 15,779  | 15,755  | 15,863  | 17,707  | 17,696  | 17,672  | 17,780  | 19,956  | 19,945  | 19,920  | 20,029  |
|      |            | Shaded area reflects ACCA (TVA) conditions |         |         |         |         |         |         |         |         |         |         |         | High and low pressures are measured at the liquid and suction access fittings. |         |         |         |         |         |         |         |         |         |         |         |
|      |            | IDB: Entering Indoor Dry Bulb Temperature  |         |         |         |         |         |         |         |         |         |         |         |                                                                                |         |         |         |         |         |         |         |         |         |         |         |

|            |            | Outdoor Ambient Temperature |                                           |         |         |         |         |         |         |         |         |         |         |         |                                            |         |         |         |         |         |         |         |         |         |                                                                                |         |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|------------|------------|-----------------------------|-------------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|--------------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|--------------------------------------------------------------------------------|---------|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
|            |            | 65                          |                                           |         |         | 75      |         |         |         | 85      |         |         |         | 95      |                                            |         |         | 105     |         |         |         | 115     |         |         |                                                                                |         |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| IDB        | Airflow    | 59                          | 63                                        | 67      | 71      | 59      | 63      | 67      | 71      | 59      | 63      | 67      | 71      | 59      | 63                                         | 67      | 71      | 59      | 63      | 67      | 71      | 59      | 63      | 67      | 71                                                                             |         |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 80         | Capacity   | 176,396                     | 178,868                                   | 184,096 | 192,080 | 174,830 | 177,302 | 182,529 | 190,514 | 170,261 | 172,732 | 177,960 | 185,945 | 162,399 | 164,870                                    | 170,098 | 178,083 | 152,791 | 155,262 | 160,490 | 168,475 | 144,019 | 146,491 | 151,718 | 159,703                                                                        |         |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|            | S/T        | 0.83                        | 0.76                                      | 0.63    | 0.49    | 0.83    | 0.76    | 0.63    | 0.50    | 1.00    | 0.79    | 0.66    | 0.52    | 1.00    | 0.80                                       | 0.68    | 0.54    | 1.00    | 0.83    | 0.70    | 0.56    | 1.00    | 0.87    | 0.75    | 0.61                                                                           |         |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|            | Evap dT    | 28.78                       | 26.87                                     | 23.32   | 19.63   | 28.73   | 26.82   | 23.26   | 19.58   | 28.99   | 27.09   | 23.53   | 19.85   | 28.71   | 26.80                                      | 23.24   | 19.56   | 28.45   | 26.55   | 22.99   | 19.30   | 29.65   | 27.74   | 24.18   | 20.50                                                                          |         |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|            | Pr Suc     | 112                         | 113                                       | 116     | 121     | 119     | 120     | 123     | 128     | 125     | 126     | 129     | 133     | 130     | 131                                        | 134     | 138     | 134     | 136     | 139     | 143     | 141     | 142     | 145     | 150                                                                            |         |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|            | Pr Dis     | 268                         | 269                                       | 271     | 276     | 310     | 312     | 313     | 318     | 355     | 356     | 358     | 362     | 402     | 403                                        | 405     | 410     | 453     | 454     | 456     | 461     | 508     | 509     | 511     | 516                                                                            |         |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|            | TotalPower | 10,924                      | 10,913                                    | 10,888  | 10,997  | 12,344  | 12,333  | 12,308  | 12,417  | 13,929  | 13,918  | 13,894  | 14,002  | 15,645  | 15,634                                     | 15,609  | 15,718  | 17,562  | 17,550  | 17,526  | 17,635  | 19,810  | 19,799  | 19,775  | 19,884                                                                         |         |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|            | Capacity   | 178,299                     | 180,770                                   | 185,998 | 193,983 | 176,732 | 179,204 | 184,431 | 192,416 | 172,163 | 174,634 | 179,862 | 187,847 | 164,301 | 166,773                                    | 172,000 | 179,985 | 154,693 | 157,164 | 162,392 | 170,377 | 145,921 | 148,393 | 153,621 | 161,606                                                                        |         |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|            | S/T        | 0.87                        | 0.80                                      | 0.67    | 0.54    | 0.88    | 0.81    | 0.68    | 0.54    | 1.00    | 0.83    | 0.70    | 0.57    | 1.00    | 0.85                                       | 0.72    | 0.58    | 1.00    | 0.87    | 0.74    | 0.61    | 1.00    | 0.92    | 0.79    | 0.65                                                                           |         |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|            | Evap dT    | 27.86                       | 25.95                                     | 22.40   | 18.71   | 27.81   | 25.90   | 22.34   | 18.66   | 28.08   | 26.17   | 22.61   | 18.93   | 27.79   | 25.88                                      | 22.32   | 18.64   | 27.53   | 25.63   | 22.07   | 18.38   | 28.73   | 26.82   | 23.26   | 19.58                                                                          |         |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|            | Pr Suc     | 113                         | 115                                       | 117     | 122     | 120     | 121     | 124     | 129     | 126     | 127     | 130     | 135     | 131     | 132                                        | 135     | 140     | 136     | 137     | 140     | 145     | 142     | 143     | 146     | 151                                                                            |         |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 85         | Pr Dis     | 270                         | 271                                       | 273     | 278     | 312     | 313     | 315     | 320     | 356     | 358     | 359     | 364     | 404     | 405                                        | 407     | 412     | 455     | 456     | 458     | 463     | 510     | 511     | 513     | 518                                                                            |         |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|            | TotalPower | 10,983                      | 10,971                                    | 10,947  | 11,056  | 12,403  | 12,392  | 12,367  | 12,476  | 13,988  | 13,977  | 13,953  | 14,061  | 15,704  | 15,692                                     | 15,668  | 15,777  | 17,620  | 17,609  | 17,585  | 17,694  | 19,869  | 19,858  | 19,834  | 19,942                                                                         |         |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|            | Capacity   | 182,913                     | 185,384                                   | 190,612 | 198,597 | 181,346 | 183,818 | 189,045 | 197,030 | 176,777 | 179,248 | 184,476 | 192,461 | 168,915 | 171,387                                    | 176,614 | 184,599 | 159,307 | 161,778 | 167,006 | 174,991 | 150,535 | 153,007 | 158,235 | 166,219                                                                        |         |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|            | S/T        | 0.91                        | 0.84                                      | 0.71    | 0.58    | 1.00    | 0.85    | 0.72    | 0.58    | 1.00    | 0.87    | 0.74    | 0.61    | 1.00    | 0.89                                       | 0.76    | 0.63    | 1.00    | 0.91    | 0.78    | 0.65    | 1.00    | 1.00    | 0.83    | 0.70                                                                           |         |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|            | Evap dT    | 26.38                       | 24.48                                     | 20.92   | 17.23   | 26.33   | 24.42   | 20.87   | 17.18   | 26.60   | 24.69   | 21.13   | 17.45   | 26.31   | 24.40                                      | 20.85   | 17.16   | 26.06   | 24.15   | 20.59   | 16.91   | 27.25   | 25.34   | 21.79   | 18.10                                                                          |         |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|            | Pr Suc     | 116                         | 118                                       | 120     | 125     | 123     | 124     | 127     | 132     | 129     | 130     | 133     | 138     | 134     | 135                                        | 138     | 143     | 139     | 140     | 143     | 148     | 145     | 146     | 149     | 154                                                                            |         |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|            | Pr Dis     | 274                         | 275                                       | 277     | 281     | 316     | 317     | 319     | 323     | 360     | 361     | 363     | 368     | 407     | 409                                        | 410     | 415     | 459     | 460     | 462     | 466     | 513     | 515     | 516     | 521                                                                            |         |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|            | TotalPower | 11,077                      | 11,065                                    | 11,041  | 11,150  | 12,497  | 12,486  | 12,461  | 12,570  | 14,082  | 14,071  | 14,047  | 14,155  | 15,798  | 15,787                                     | 15,762  | 15,871  | 17,715  | 17,703  | 17,679  | 17,788  | 19,963  | 19,952  | 19,928  | 20,037                                                                         |         |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|            | 6000       | Capacity                    | 179,345                                   | 181,817 | 187,044 | 195,029 | 177,779 | 180,250 | 185,478 | 193,463 | 173,209 | 175,681 | 180,908 | 188,893 | 165,347                                    | 167,819 | 173,046 | 181,031 | 155,739 | 158,211 | 163,438 | 171,423 | 146,968 | 149,439 | 154,667                                                                        | 162,652 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|            |            | S/T                         | 1.00                                      | 0.85    | 0.72    | 0.59    | 1.00    | 0.86    | 0.73    | 0.59    | 1.00    | 0.88    | 0.75    | 0.62    | 1.00                                       | 0.90    | 0.77    | 0.64    | 1.00    | 1.00    | 0.79    | 0.66    | 1.00    | 1.00    | 0.84                                                                           | 0.71    |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| Evap dT    |            | 32.52                       | 30.61                                     | 27.06   | 23.37   | 32.47   | 30.56   | 27.00   | 23.32   | 32.74   | 30.83   | 27.27   | 23.59   | 32.45   | 30.54                                      | 26.98   | 23.30   | 32.19   | 30.29   | 26.73   | 23.04   | 33.39   | 31.48   | 27.92   | 24.24                                                                          |         |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| Pr Suc     |            | 114                         | 115                                       | 118     | 122     | 120     | 122     | 125     | 129     | 126     | 128     | 130     | 135     | 131     | 133                                        | 135     | 140     | 136     | 138     | 140     | 145     | 142     | 144     | 146     | 151                                                                            |         |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| Pr Dis     |            | 269                         | 271                                       | 273     | 277     | 312     | 313     | 315     | 319     | 356     | 357     | 359     | 363     | 403     | 404                                        | 406     | 411     | 455     | 456     | 458     | 462     | 509     | 510     | 512     | 517                                                                            |         |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| TotalPower |            | 10,951                      | 10,940                                    | 10,915  | 11,024  | 12,371  | 12,360  | 12,336  | 12,444  | 13,956  | 13,945  | 13,921  | 14,030  | 15,672  | 15,661                                     | 15,637  | 15,745  | 17,589  | 17,578  | 17,553  | 17,662  | 19,838  | 19,826  | 19,802  | 19,911                                                                         |         |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| Capacity   |            | 181,247                     | 183,719                                   | 188,946 | 196,931 | 179,681 | 182,152 | 187,380 | 195,365 | 175,111 | 177,583 | 182,810 | 190,795 | 167,249 | 169,721                                    | 174,949 | 182,933 | 157,641 | 160,113 | 165,340 | 173,325 | 148,870 | 151,342 | 156,569 | 164,554                                                                        |         |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| S/T        |            | 1.00                        | 0.90                                      | 0.77    | 0.63    | 1.00    | 0.90    | 0.77    | 0.64    | 1.00    | 0.93    | 0.80    | 0.66    | 1.00    | 0.94                                       | 0.82    | 0.68    | 1.00    | 1.00    | 0.84    | 0.70    | 1.000   | 1.000   | 0.886   | 0.750                                                                          |         |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| Evap dT    |            | 31.60                       | 29.69                                     | 26.14   | 22.45   | 31.55   | 29.64   | 26.09   | 22.40   | 31.82   | 29.91   | 26.35   | 22.67   | 31.53   | 29.62                                      | 26.07   | 22.38   | 31.27   | 29.37   | 25.81   | 22.13   | 32.47   | 30.56   | 27.00   | 23.32                                                                          |         |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| Pr Suc     |            | 115                         | 116                                       | 119     | 124     | 122     | 123     | 126     | 131     | 128     | 129     | 132     | 136     | 133     | 134                                        | 137     | 142     | 137     | 139     | 142     | 146     | 144     | 145     | 148     | 153                                                                            |         |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| 6000       | Pr Dis     | 271                         | 272                                       | 274     | 279     | 313     | 315     | 317     | 321     | 358     | 359     | 361     | 365     | 405     | 406                                        | 408     | 413     | 456     | 458     | 459     | 464     | 511     | 512     | 514     | 519                                                                            |         |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|            | TotalPower | 11,010                      | 10,999                                    | 10,974  | 11,083  | 12,430  | 12,419  | 12,394  | 12,503  | 14,015  | 14,004  | 13,980  | 14,088  | 15,731  | 15,720                                     | 15,695  | 15,804  | 17,648  | 17,636  | 17,612  | 17,721  | 19,896  | 19,885  | 19,861  | 19,970                                                                         |         |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|            | Capacity   | 185,861                     | 188,333                                   | 193,560 | 201,545 | 184,295 | 186,766 | 191,994 | 199,979 | 179,725 | 182,197 | 187,424 | 195,409 | 171,863 | 174,335                                    | 179,563 | 187,547 | 162,255 | 164,727 | 169,954 | 177,939 | 153,484 | 155,956 | 161,183 | 169,168                                                                        |         |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|            | S/T        | 1.00                        | 0.94                                      | 0.81    | 0.67    | 1.00    | 0.94    | 0.81    | 0.68    | 1.00    | 0.97    | 0.84    | 0.70    | 1.00    | 1.00                                       | 0.86    | 0.72    | 1.00    | 1.00    | 0.88    | 0.74    | 1.00    | 1.00    | 0.93    | 0.79                                                                           |         |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|            | Evap dT    | 30.12                       | 28.22                                     | 24.66   | 20.97   | 30.07   | 28.16   | 24.61   | 20.92   | 30.34   | 28.43   | 24.87   | 21.19   | 30.05   | 28.15                                      | 24.59   | 20.90   | 29.80   | 27.89   | 24.33   | 20.65   | 30.99   | 29.08   | 25.53   | 21.84                                                                          |         |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|            | Pr Suc     | 118                         | 119                                       | 122     | 127     | 125     | 126     | 129     | 134     | 131     | 132     | 135     | 139     | 136     | 137                                        | 140     | 144     | 140     | 142     | 145     | 149     | 147     | 148     | 151     | 156                                                                            |         |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|            | Pr Dis     | 275                         | 276                                       | 278     | 283     | 317     | 318     | 320     | 325     | 361     | 362     | 364     | 369     | 409     | 410                                        | 412     | 416     | 460     | 461     | 463     | 468     | 515     | 516     | 518     | 522                                                                            |         |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|            | TotalPower | 11,104                      | 11,093                                    | 11,068  | 11,177  | 12,524  | 12,513  | 12,489  | 12,597  | 14,109  | 14,098  | 14,074  | 14,182  | 15,825  | 15,814                                     | 15,789  | 15,898  | 17,742  | 17,730  | 17,706  | 17,815  | 19,990  | 19,979  | 19,955  | 20,064                                                                         |         |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|            |            |                             | IDB: Entering Indoor Dry Bulb Temperature |         |         |         |         |         |         |         |         |         |         |         | Shaded area reflects ACCA (TVA) conditions |         |         |         |         |         |         |         |         |         | High and low pressures are measured at the liquid and suction access fittings. |         |  |  |  |  |  |  |  |  |  |  |  |  |  |  |

|      |            | Outdoor Ambient Temperature |         |         |         |         |         |         |         |         |         |         |         |         |         |         |         |         |         |         |         |         |         |         |         |         |         |         |         |         |         |         |         |         |         |         |         |
|------|------------|-----------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
|      |            | 65                          |         |         |         | 75      |         |         |         | 85      |         |         |         | 95      |         |         |         | 105     |         |         |         | 115     |         |         |         |         |         |         |         |         |         |         |         |         |         |         |         |
| IDB  | Airflow    | 59                          | 63      | 67      | 71      | 59      | 63      | 67      | 71      | 59      | 63      | 67      | 71      | 59      | 63      | 67      | 71      | 59      | 63      | 67      | 71      | 59      | 63      | 67      | 71      | 59      | 63      | 67      | 71      |         |         |         |         |         |         |         |         |
| 70   | Capacity   | 235,203                     | 238,509 | 245,499 | -       | 233,109 | 236,414 | 243,404 | -       | 226,999 | 230,304 | 237,294 | -       | 216,486 | 219,791 | 226,781 | -       | 203,638 | 206,943 | 213,933 | -       | 191,909 | 195,214 | 202,204 | -       | 179,909 | 183,214 | 190,204 | -       |         |         |         |         |         |         |         |         |
|      | S/T        | 0.60                        | 0.53    | 0.40    | -       | 0.61    | 0.54    | 0.41    | -       | 0.63    | 0.56    | 0.43    | -       | 0.65    | 0.58    | 0.45    | -       | 0.67    | 0.60    | 0.47    | -       | 0.69    | 0.62    | 0.50    | -       | 0.71    | 0.64    | 0.51    | -       |         |         |         |         |         |         |         |         |
|      | Evap dT    | 20.60                       | 18.64   | 15.00   | -       | 20.54   | 18.59   | 14.95   | -       | 20.82   | 18.87   | 15.22   | -       | 20.52   | 18.57   | 14.93   | -       | 20.26   | 18.31   | 14.66   | -       | 21.49   | 19.53   | 15.89   | -       | 21.49   | 19.53   | 15.89   | -       |         |         |         |         |         |         |         |         |
|      | Pr Suc     | 120                         | 121     | 124     | -       | 127     | 129     | 132     | -       | 133     | 135     | 138     | -       | 139     | 140     | 143     | -       | 144     | 145     | 149     | -       | 151     | 152     | 155     | -       | 151     | 152     | 155     | -       |         |         |         |         |         |         |         |         |
|      | Pr Dis     | 264                         | 265     | 267     | -       | 305     | 306     | 308     | -       | 348     | 350     | 351     | -       | 395     | 396     | 398     | -       | 446     | 447     | 449     | -       | 499     | 501     | 502     | -       | 499     | 501     | 502     | -       |         |         |         |         |         |         |         |         |
|      | TotalPower | 15,161                      | 15,147  | 15,117  | -       | 16,903  | 16,889  | 16,859  | -       | 18,848  | 18,834  | 18,804  | -       | 20,952  | 20,938  | 20,909  | -       | 23,303  | 23,290  | 23,260  | -       | 26,062  | 26,048  | 26,018  | -       | 26,062  | 26,048  | 26,018  | -       |         |         |         |         |         |         |         |         |
| 75   | Capacity   | 237,074                     | 240,379 | 247,369 | -       | 234,979 | 238,284 | 245,274 | -       | 228,869 | 232,174 | 239,164 | -       | 218,356 | 221,661 | 228,651 | -       | 205,508 | 208,813 | 215,803 | -       | 193,779 | 197,084 | 204,074 | -       | 181,979 | 185,284 | 192,274 | -       |         |         |         |         |         |         |         |         |
|      | S/T        | 0.63                        | 0.56    | 0.43    | -       | 0.64    | 0.57    | 0.44    | -       | 0.66    | 0.59    | 0.46    | -       | 0.68    | 0.61    | 0.48    | -       | 0.70    | 0.63    | 0.50    | -       | 0.72    | 0.65    | 0.52    | -       | 0.74    | 0.67    | 0.54    | -       |         |         |         |         |         |         |         |         |
|      | Evap dT    | 19.93                       | 17.98   | 14.34   | -       | 19.88   | 17.93   | 14.28   | -       | 20.15   | 18.20   | 14.56   | -       | 19.86   | 17.91   | 14.26   | -       | 19.60   | 17.65   | 14.00   | -       | 20.82   | 18.87   | 15.22   | -       | 20.82   | 18.87   | 15.22   | -       |         |         |         |         |         |         |         |         |
|      | Pr Suc     | 121                         | 122     | 125     | -       | 128     | 130     | 133     | -       | 134     | 136     | 139     | -       | 140     | 141     | 144     | -       | 145     | 147     | 150     | -       | 152     | 153     | 156     | -       | 152     | 153     | 156     | -       |         |         |         |         |         |         |         |         |
|      | Pr Dis     | 265                         | 266     | 268     | -       | 306     | 307     | 309     | -       | 350     | 351     | 353     | -       | 397     | 398     | 399     | -       | 447     | 448     | 450     | -       | 501     | 502     | 504     | -       | 501     | 502     | 504     | -       |         |         |         |         |         |         |         |         |
|      | TotalPower | 15,212                      | 15,198  | 15,168  | -       | 16,954  | 16,940  | 16,910  | -       | 18,898  | 18,885  | 18,855  | -       | 21,003  | 20,989  | 20,959  | -       | 23,354  | 23,340  | 23,311  | -       | 26,113  | 26,099  | 26,069  | -       | 26,113  | 26,099  | 26,069  | -       |         |         |         |         |         |         |         |         |
| 8000 | Capacity   | 244,645                     | 247,950 | 254,940 | -       | 242,550 | 245,855 | 252,845 | -       | 236,440 | 239,745 | 246,735 | -       | 225,927 | 229,232 | 236,222 | -       | 213,079 | 216,384 | 223,374 | -       | 201,350 | 204,655 | 211,645 | -       | 189,629 | 192,934 | 199,924 | -       |         |         |         |         |         |         |         |         |
|      | S/T        | 0.67                        | 0.60    | 0.47    | -       | 0.68    | 0.61    | 0.48    | -       | 0.70    | 0.63    | 0.50    | -       | 0.72    | 0.65    | 0.52    | -       | 0.74    | 0.67    | 0.54    | -       | 0.76    | 0.69    | 0.56    | -       | 0.78    | 0.71    | 0.58    | -       |         |         |         |         |         |         |         |         |
|      | Evap dT    | 18.16                       | 16.21   | 12.56   | -       | 18.10   | 16.15   | 12.51   | -       | 18.38   | 16.43   | 12.78   | -       | 18.08   | 16.13   | 12.49   | -       | 17.82   | 15.87   | 12.23   | -       | 19.05   | 17.09   | 13.45   | -       | 19.05   | 17.09   | 13.45   | -       |         |         |         |         |         |         |         |         |
|      | Pr Suc     | 125                         | 126     | 129     | -       | 132     | 133     | 136     | -       | 138     | 140     | 143     | -       | 144     | 145     | 148     | -       | 149     | 150     | 153     | -       | 156     | 157     | 160     | -       | 156     | 157     | 160     | -       |         |         |         |         |         |         |         |         |
|      | Pr Dis     | 269                         | 270     | 272     | -       | 310     | 312     | 313     | -       | 354     | 355     | 357     | -       | 401     | 402     | 404     | -       | 451     | 452     | 454     | -       | 505     | 506     | 508     | -       | 505     | 506     | 508     | -       |         |         |         |         |         |         |         |         |
|      | TotalPower | 15,347                      | 15,333  | 15,303  | -       | 17,089  | 17,075  | 17,045  | -       | 19,034  | 19,020  | 18,990  | -       | 21,138  | 21,124  | 21,095  | -       | 23,489  | 23,476  | 23,446  | -       | 26,248  | 26,234  | 26,204  | -       | 26,248  | 26,234  | 26,204  | -       |         |         |         |         |         |         |         |         |
| 6000 | Capacity   | 235,340                     | 238,645 | 245,635 | 256,313 | 233,233 | 236,550 | 243,541 | 254,218 | 227,135 | 230,440 | 237,430 | 248,108 | 216,622 | 219,927 | 226,917 | 237,595 | 203,774 | 207,079 | 214,069 | 224,747 | 192,045 | 195,350 | 202,340 | 213,018 | 180,340 | 183,645 | 190,635 | 197,625 | 204,615 | 211,605 | 218,595 | 225,585 | 232,575 | 239,565 | 246,555 | 253,545 |
|      | S/T        | 0.72                        | 0.65    | 0.52    | 0.39    | 0.73    | 0.66    | 0.53    | 0.39    | 0.74    | 0.67    | 0.54    | 0.40    | 0.75    | 0.68    | 0.55    | 0.41    | 0.76    | 0.69    | 0.56    | 0.42    | 0.77    | 0.70    | 0.57    | 0.43    | 0.78    | 0.71    | 0.58    | 0.44    | 0.79    | 0.72    | 0.59    | 0.45    | 0.80    | 0.73    | 0.60    | 0.46    |
|      | Evap dT    | 24.89                       | 22.94   | 19.29   | 15.51   | 24.84   | 22.88   | 19.24   | 15.46   | 25.11   | 23.16   | 19.51   | 15.74   | 24.82   | 22.86   | 19.22   | 15.44   | 24.56   | 22.60   | 18.96   | 15.18   | 25.78   | 23.83   | 20.18   | 16.40   | 24.89   | 22.94   | 19.29   | 15.51   | 24.84   | 22.88   | 19.24   | 15.46   | 25.11   | 23.16   | 19.51   | 15.74   |
|      | Pr Suc     | 120                         | 121     | 124     | 129     | 127     | 129     | 132     | 137     | 133     | 135     | 138     | 143     | 139     | 140     | 143     | 148     | 144     | 146     | 149     | 154     | 151     | 152     | 155     | 160     | 149     | 150     | 153     | 158     | 164     | 170     | 176     | 182     | 188     | 194     | 200     | 206     |
|      | Pr Dis     | 264                         | 265     | 267     | 271     | 305     | 306     | 308     | 313     | 349     | 350     | 352     | 356     | 395     | 397     | 398     | 403     | 446     | 447     | 449     | 453     | 500     | 501     | 503     | 507     | 449     | 450     | 453     | 458     | 464     | 470     | 476     | 482     | 488     | 494     | 500     | 506     |
|      | TotalPower | 15,150                      | 15,136  | 15,106  | 15,239  | 16,892  | 16,878  | 16,848  | 16,981  | 18,836  | 18,823  | 18,793  | 18,926  | 20,941  | 20,927  | 20,897  | 21,031  | 23,292  | 23,278  | 23,249  | 23,382  | 26,051  | 26,037  | 26,007  | 26,140  | 23,343  | 23,329  | 23,299  | 23,433  | 26,101  | 26,088  | 26,058  | 26,191  | 26,177  | 26,147  | 26,280  | 26,313  |
| 6475 | Capacity   | 237,210                     | 240,515 | 247,505 | 258,183 | 235,115 | 238,420 | 245,411 | 256,088 | 229,005 | 232,310 | 239,300 | 249,978 | 218,492 | 221,797 | 228,787 | 239,465 | 205,644 | 208,949 | 215,939 | 226,617 | 193,915 | 197,220 | 204,210 | 214,888 | 181,210 | 184,515 | 191,505 | 198,495 | 205,485 | 212,475 | 219,465 | 226,455 | 233,445 | 240,435 | 247,425 | 254,415 |
|      | S/T        | 0.75                        | 0.68    | 0.55    | 0.42    | 0.76    | 0.69    | 0.56    | 0.42    | 0.77    | 0.70    | 0.57    | 0.43    | 0.78    | 0.71    | 0.58    | 0.44    | 0.79    | 0.72    | 0.59    | 0.45    | 0.80    | 0.73    | 0.60    | 0.46    | 0.81    | 0.74    | 0.61    | 0.47    | 0.82    | 0.75    | 0.62    | 0.48    | 0.83    | 0.76    | 0.63    | 0.49    |
|      | Evap dT    | 24.23                       | 22.27   | 18.63   | 14.85   | 24.17   | 22.22   | 18.58   | 14.80   | 24.45   | 22.50   | 18.85   | 15.07   | 24.15   | 22.20   | 18.55   | 14.78   | 23.89   | 21.94   | 18.29   | 14.52   | 25.11   | 23.16   | 19.52   | 15.74   | 24.90   | 22.94   | 19.29   | 15.51   | 24.84   | 22.88   | 19.24   | 15.46   | 25.11   | 23.16   | 19.52   | 15.74   |
|      | Pr Suc     | 121                         | 122     | 125     | 130     | 128     | 130     | 133     | 138     | 134     | 136     | 139     | 144     | 140     | 141     | 144     | 149     | 145     | 147     | 150     | 155     | 152     | 153     | 156     | 161     | 149     | 150     | 153     | 158     | 164     | 170     | 176     | 182     | 188     | 194     | 200     | 206     |
|      | Pr Dis     | 265                         | 266     | 268     | 273     | 307     | 308     | 310     | 314     | 350     | 351     | 353     | 358     | 397     | 398     | 399     | 404     | 447     | 448     | 450     | 455     | 501     | 502     | 504     | 509     | 449     | 450     | 453     | 458     | 464     | 470     | 476     | 482     | 488     | 494     | 500     | 506     |
|      | TotalPower | 15,200                      | 15,187  | 15,157  | 15,290  | 16,942  | 16,929  | 16,899  | 17,032  | 18,887  | 18,873  | 18,844  | 18,977  | 20,992  | 20,978  | 20,948  | 21,081  | 23,343  | 23,329  | 23,299  | 23,433  | 26,101  | 26,088  | 26,058  | 26,191  | 23,343  | 23,329  | 23,299  | 23,433  | 26,101  | 26,088  | 26,058  | 26,191  | 26,177  | 26,147  | 26,280  | 26,313  |
| 8000 | Capacity   | 244,781                     | 248,086 | 255,076 | 265,754 | 242,686 | 245,991 | 252,982 | 263,659 | 236,576 | 239,881 | 246,871 | 257,549 | 226,063 | 229,368 | 236,359 | 247,036 | 213,215 | 216,520 | 223,511 | 234,188 | 201,486 | 204,791 | 211,781 | 222,459 | 183,781 | 187,086 | 194,076 | 201,066 | 208,056 | 215,046 | 222,036 | 229,026 | 236,016 | 243,006 | 250,006 | 257,006 |
|      | S/T        | 0.80                        | 0.72    | 0.60    | 0.46    | 0.80    | 0.73    | 0.60    | 0.47    | 0.81    | 0.74    | 0.61    | 0.47    | 0.82    | 0.75    | 0.62    | 0.48    | 0.83    | 0.76    | 0.63    | 0.49    | 0.84    | 0.77    | 0.64    | 0.50    | 0.85    | 0.78    | 0.65    | 0.51    | 0.86    | 0.79    | 0.66    | 0.52    | 0.87    | 0.80    | 0.67    | 0.53    |
|      | Evap dT    | 22.45                       | 20.50   | 16.85   | 13.08   | 22.40   | 20.45   | 16.80   | 13.02   | 22.67   | 20.72   | 17.07   | 13.30   | 22.38   | 20.42   | 16.78   | 13.00   | 22.12   | 20.16   | 16.52   | 12.74   | 23.34   | 21.39   | 17.74   | 13.96   | 23.34   | 21.39   | 17.74   | 13.96   | 23.34   | 21.39   | 17.74   | 13.96   | 23.34   | 21.39   | 17.74   | 13.96   |
|      | Pr Suc     | 125                         | 126     | 129     | 134     | 132     | 133     | 136     | 142     | 138     | 140     | 143     | 148     | 144     | 145     | 148     | 153     | 149     | 150     | 153     | 159     | 156     | 157     | 160     | 165     | 156     | 157     | 160     | 165     | 156     | 157     | 160     | 165     | 156     | 157     | 160     | 165     |
|      | Pr Dis     | 269                         | 270     | 272     | 277     | 311     | 312     | 314     | 318     | 354     | 355     | 357     | 362     | 401     | 402     | 404     | 408     | 451     | 452     | 454     | 459     | 505     | 506     | 508     | 513     | 505     | 506     | 508     | 513     | 505     | 506     | 508     | 513     |         |         |         |         |

|            |            | Outdoor Ambient Temperature |                                           |         |         |         |         |         |         |         |         |         |         |         |                                            |         |         |         |         |         |         |         |         |         |                                                                                |         |  |  |  |  |  |  |  |  |  |  |
|------------|------------|-----------------------------|-------------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|--------------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|--------------------------------------------------------------------------------|---------|--|--|--|--|--|--|--|--|--|--|
|            |            | 65                          |                                           |         |         | 75      |         |         |         | 85      |         |         |         | 95      |                                            |         |         | 105     |         |         |         | 115     |         |         |                                                                                |         |  |  |  |  |  |  |  |  |  |  |
| IDB        | Airflow    | 59                          | 63                                        | 67      | 71      | 59      | 63      | 67      | 71      | 59      | 63      | 67      | 71      | 59      | 63                                         | 67      | 71      | 59      | 63      | 67      | 71      | 59      | 63      | 67      | 71                                                                             |         |  |  |  |  |  |  |  |  |  |  |
| 80         | Capacity   | 236,552                     | 239,857                                   | 246,847 | 257,525 | 234,457 | 237,763 | 244,753 | 255,430 | 228,347 | 231,652 | 238,642 | 249,320 | 217,834 | 221,139                                    | 228,130 | 238,807 | 204,986 | 208,291 | 215,282 | 225,959 | 193,257 | 196,562 | 203,552 | 214,230                                                                        |         |  |  |  |  |  |  |  |  |  |  |
|            | S/T        | 0.84                        | 0.77                                      | 0.64    | 0.51    | 1.00    | 0.78    | 0.65    | 0.51    | 1.00    | 0.80    | 0.67    | 0.54    | 1.00    | 0.82                                       | 0.69    | 0.55    | 1.00    | 1.00    | 0.71    | 0.58    | 1.00    | 1.00    | 0.76    | 0.62                                                                           |         |  |  |  |  |  |  |  |  |  |  |
|            | Evap dT    | 29.21                       | 27.26                                     | 23.61   | 19.84   | 29.16   | 27.21   | 23.56   | 19.78   | 29.43   | 27.48   | 23.84   | 20.06   | 29.14   | 27.19                                      | 23.54   | 19.76   | 28.88   | 26.93   | 23.28   | 19.50   | 30.10   | 28.15   | 24.50   | 20.73                                                                          |         |  |  |  |  |  |  |  |  |  |  |
|            | Pr Suc     | 120                         | 122                                       | 125     | 130     | 128     | 129     | 132     | 137     | 134     | 135     | 138     | 144     | 139     | 141                                        | 144     | 149     | 145     | 146     | 149     | 154     | 151     | 153     | 156     | 161                                                                            |         |  |  |  |  |  |  |  |  |  |  |
|            | Pr Dis     | 264                         | 265                                       | 267     | 272     | 306     | 307     | 309     | 313     | 349     | 350     | 352     | 357     | 396     | 397                                        | 399     | 403     | 446     | 447     | 449     | 454     | 500     | 501     | 503     | 508                                                                            |         |  |  |  |  |  |  |  |  |  |  |
|            | TotalPower | 15,159                      | 15,145                                    | 15,115  | 15,248  | 16,901  | 16,887  | 16,857  | 16,991  | 18,845  | 18,832  | 18,802  | 18,935  | 20,950  | 20,936                                     | 20,906  | 21,040  | 23,301  | 23,287  | 23,258  | 23,391  | 26,060  | 26,046  | 26,016  | 26,150                                                                         |         |  |  |  |  |  |  |  |  |  |  |
|            | Capacity   | 238,422                     | 241,727                                   | 248,717 | 259,395 | 236,328 | 239,633 | 246,623 | 257,300 | 230,217 | 233,522 | 240,512 | 251,190 | 219,704 | 223,009                                    | 230,000 | 240,677 | 206,856 | 210,161 | 217,152 | 227,829 | 195,127 | 198,432 | 205,423 | 216,100                                                                        |         |  |  |  |  |  |  |  |  |  |  |
|            | S/T        | 0.87                        | 0.80                                      | 0.67    | 0.54    | 1.00    | 0.81    | 0.68    | 0.54    | 1.00    | 0.83    | 0.70    | 0.57    | 1.00    | 0.85                                       | 0.72    | 0.58    | 1.00    | 1.00    | 0.74    | 0.61    | 1.00    | 1.00    | 0.79    | 0.65                                                                           |         |  |  |  |  |  |  |  |  |  |  |
|            | Evap dT    | 28.55                       | 26.60                                     | 22.95   | 19.17   | 28.50   | 26.54   | 22.90   | 19.12   | 28.77   | 26.82   | 23.17   | 19.39   | 28.48   | 26.52                                      | 22.88   | 19.10   | 28.21   | 26.26   | 22.62   | 18.84   | 29.44   | 27.48   | 23.84   | 20.06                                                                          |         |  |  |  |  |  |  |  |  |  |  |
|            | Pr Suc     | 121                         | 123                                       | 126     | 131     | 129     | 130     | 133     | 138     | 135     | 136     | 139     | 145     | 140     | 142                                        | 145     | 150     | 146     | 147     | 150     | 155     | 152     | 154     | 157     | 162                                                                            |         |  |  |  |  |  |  |  |  |  |  |
| 85         | Pr Dis     | 266                         | 267                                       | 269     | 273     | 307     | 308     | 310     | 315     | 350     | 352     | 353     | 358     | 397     | 398                                        | 400     | 405     | 448     | 449     | 451     | 455     | 501     | 503     | 504     | 509                                                                            |         |  |  |  |  |  |  |  |  |  |  |
|            | TotalPower | 15,209                      | 15,196                                    | 15,166  | 15,299  | 16,952  | 16,938  | 16,908  | 17,041  | 18,896  | 18,883  | 18,853  | 18,986  | 21,001  | 20,987                                     | 20,957  | 21,090  | 23,352  | 23,338  | 23,308  | 23,442  | 26,111  | 26,097  | 26,067  | 26,200                                                                         |         |  |  |  |  |  |  |  |  |  |  |
|            | Capacity   | 245,993                     | 249,298                                   | 256,289 | 266,966 | 243,899 | 247,204 | 254,194 | 264,871 | 237,788 | 241,093 | 248,084 | 258,761 | 227,276 | 230,581                                    | 237,571 | 248,248 | 214,428 | 217,733 | 224,723 | 235,400 | 202,698 | 206,003 | 212,994 | 223,671                                                                        |         |  |  |  |  |  |  |  |  |  |  |
|            | S/T        | 1.00                        | 0.84                                      | 0.71    | 0.58    | 1.00    | 0.85    | 0.72    | 0.59    | 1.00    | 0.87    | 0.74    | 0.61    | 1.00    | 1.00                                       | 0.76    | 0.63    | 1.00    | 1.00    | 0.78    | 0.65    | 1.00    | 1.00    | 0.83    | 0.70                                                                           |         |  |  |  |  |  |  |  |  |  |  |
|            | Evap dT    | 26.77                       | 24.82                                     | 21.18   | 17.40   | 26.72   | 24.77   | 21.12   | 17.34   | 26.99   | 25.04   | 21.40   | 17.62   | 26.70   | 24.75                                      | 21.10   | 17.32   | 26.44   | 24.49   | 20.84   | 17.06   | 27.66   | 25.71   | 22.06   | 18.29                                                                          |         |  |  |  |  |  |  |  |  |  |  |
|            | Pr Suc     | 125                         | 127                                       | 130     | 135     | 133     | 134     | 137     | 142     | 139     | 140     | 143     | 148     | 144     | 146                                        | 149     | 154     | 149     | 151     | 154     | 159     | 156     | 158     | 161     | 166                                                                            |         |  |  |  |  |  |  |  |  |  |  |
|            | Pr Dis     | 270                         | 271                                       | 273     | 277     | 311     | 312     | 314     | 319     | 355     | 356     | 358     | 362     | 401     | 402                                        | 404     | 409     | 452     | 453     | 455     | 459     | 506     | 507     | 509     | 513                                                                            |         |  |  |  |  |  |  |  |  |  |  |
|            | TotalPower | 15,345                      | 15,331                                    | 15,301  | 15,434  | 17,087  | 17,073  | 17,043  | 17,177  | 19,031  | 19,018  | 18,988  | 19,121  | 21,136  | 21,122                                     | 21,092  | 21,226  | 23,487  | 23,473  | 23,444  | 23,577  | 26,246  | 26,232  | 26,202  | 26,336                                                                         |         |  |  |  |  |  |  |  |  |  |  |
|            | 8000       | Capacity                    | 240,495                                   | 243,800 | 250,790 | 261,468 | 238,400 | 241,705 | 248,696 | 259,373 | 232,290 | 235,595 | 242,585 | 253,263 | 221,777                                    | 225,082 | 232,072 | 242,750 | 208,929 | 212,234 | 219,224 | 229,902 | 197,200 | 200,505 | 207,495                                                                        | 218,173 |  |  |  |  |  |  |  |  |  |  |
|            |            | S/T                         | 1.00                                      | 0.87    | 0.74    | 0.60    | 1.00    | 0.87    | 0.74    | 0.61    | 1.00    | 1.00    | 0.77    | 0.63    | 1.00                                       | 1.00    | 0.79    | 0.65    | 1.00    | 1.00    | 0.81    | 0.67    | 1.00    | 1.00    | 0.86                                                                           | 0.72    |  |  |  |  |  |  |  |  |  |  |
| Evap dT    |            | 33.05                       | 31.09                                     | 27.45   | 23.67   | 32.99   | 31.04   | 27.39   | 23.62   | 33.27   | 31.31   | 27.67   | 23.89   | 32.97   | 31.02                                      | 27.37   | 23.60   | 32.71   | 30.76   | 27.11   | 23.34   | 33.93   | 31.98   | 28.34   | 24.56                                                                          |         |  |  |  |  |  |  |  |  |  |  |
| Pr Suc     |            | 122                         | 124                                       | 127     | 132     | 129     | 131     | 134     | 139     | 136     | 137     | 140     | 145     | 141     | 143                                        | 146     | 151     | 146     | 148     | 151     | 156     | 153     | 154     | 157     | 163                                                                            |         |  |  |  |  |  |  |  |  |  |  |
| Pr Dis     |            | 266                         | 267                                       | 269     | 273     | 307     | 308     | 310     | 315     | 350     | 352     | 353     | 358     | 397     | 398                                        | 400     | 405     | 448     | 449     | 451     | 455     | 501     | 503     | 504     | 509                                                                            |         |  |  |  |  |  |  |  |  |  |  |
| TotalPower |            | 15,192                      | 15,178                                    | 15,149  | 15,282  | 16,934  | 16,920  | 16,891  | 17,024  | 18,879  | 18,865  | 18,835  | 18,969  | 20,983  | 20,970                                     | 20,940  | 21,073  | 23,335  | 23,321  | 23,291  | 23,424  | 26,093  | 26,079  | 26,050  | 26,183                                                                         |         |  |  |  |  |  |  |  |  |  |  |
| Capacity   |            | 242,365                     | 245,670                                   | 252,660 | 263,338 | 240,270 | 243,575 | 250,566 | 261,243 | 234,160 | 237,465 | 244,455 | 255,133 | 223,647 | 226,952                                    | 233,942 | 244,620 | 210,799 | 214,104 | 221,094 | 231,772 | 199,070 | 202,375 | 209,365 | 220,043                                                                        |         |  |  |  |  |  |  |  |  |  |  |
| S/T        |            | 1.00                        | 0.90                                      | 0.77    | 0.63    | 1.00    | 0.90    | 0.77    | 0.64    | 1.00    | 1.00    | 0.80    | 0.66    | 1.00    | 1.00                                       | 0.82    | 0.68    | 1.00    | 1.00    | 0.84    | 0.70    | 1.00    | 1.00    | 0.88    | 0.750                                                                          |         |  |  |  |  |  |  |  |  |  |  |
| Evap dT    |            | 32.38                       | 30.43                                     | 26.78   | 23.01   | 32.33   | 30.38   | 26.73   | 22.95   | 32.60   | 30.65   | 27.01   | 23.23   | 32.31   | 30.36                                      | 26.71   | 22.93   | 32.05   | 30.10   | 26.45   | 22.67   | 33.27   | 31.32   | 27.67   | 23.90                                                                          |         |  |  |  |  |  |  |  |  |  |  |
| Pr Suc     |            | 123                         | 125                                       | 128     | 133     | 130     | 132     | 135     | 140     | 137     | 138     | 141     | 146     | 142     | 144                                        | 147     | 152     | 147     | 149     | 152     | 157     | 154     | 155     | 158     | 164                                                                            |         |  |  |  |  |  |  |  |  |  |  |
| 8000       | Pr Dis     | 267                         | 268                                       | 270     | 274     | 308     | 309     | 311     | 316     | 352     | 353     | 355     | 359     | 398     | 400                                        | 401     | 406     | 449     | 450     | 452     | 456     | 503     | 504     | 506     | 510                                                                            |         |  |  |  |  |  |  |  |  |  |  |
|            | TotalPower | 15,243                      | 15,229                                    | 15,199  | 15,333  | 16,985  | 16,971  | 16,941  | 17,075  | 18,930  | 18,916  | 18,886  | 19,019  | 21,034  | 21,020                                     | 20,991  | 21,124  | 23,385  | 23,372  | 23,342  | 23,475  | 26,144  | 26,130  | 26,100  | 26,234                                                                         |         |  |  |  |  |  |  |  |  |  |  |
|            | Capacity   | 249,936                     | 253,241                                   | 260,231 | 270,909 | 247,841 | 251,147 | 258,137 | 268,814 | 241,731 | 245,036 | 252,076 | 262,704 | 231,218 | 234,523                                    | 241,514 | 252,191 | 218,370 | 221,675 | 228,666 | 239,343 | 206,641 | 209,946 | 216,936 | 227,614                                                                        |         |  |  |  |  |  |  |  |  |  |  |
|            | S/T        | 1.00                        | 0.94                                      | 0.81    | 0.68    | 1.00    | 1.00    | 0.82    | 0.68    | 1.00    | 1.00    | 0.84    | 0.70    | 1.00    | 1.00                                       | 0.86    | 0.72    | 1.00    | 1.00    | 0.88    | 0.74    | 1.00    | 1.00    | 0.88    | 0.79                                                                           |         |  |  |  |  |  |  |  |  |  |  |
|            | Evap dT    | 30.61                       | 28.65                                     | 25.01   | 21.23   | 30.55   | 28.60   | 24.96   | 21.18   | 30.83   | 28.88   | 25.23   | 21.45   | 30.53   | 28.58                                      | 24.94   | 21.16   | 30.27   | 28.32   | 24.67   | 20.90   | 31.50   | 29.54   | 25.90   | 22.12                                                                          |         |  |  |  |  |  |  |  |  |  |  |
|            | Pr Suc     | 127                         | 129                                       | 132     | 137     | 134     | 136     | 139     | 144     | 141     | 142     | 145     | 150     | 146     | 147                                        | 151     | 156     | 151     | 153     | 156     | 161     | 158     | 159     | 162     | 167                                                                            |         |  |  |  |  |  |  |  |  |  |  |
|            | Pr Dis     | 271                         | 272                                       | 274     | 279     | 312     | 314     | 315     | 320     | 356     | 357     | 359     | 363     | 403     | 404                                        | 406     | 410     | 453     | 454     | 456     | 461     | 507     | 508     | 510     | 514                                                                            |         |  |  |  |  |  |  |  |  |  |  |
|            | TotalPower | 15,378                      | 15,364                                    | 15,335  | 15,468  | 17,120  | 17,106  | 17,077  | 17,210  | 19,065  | 19,051  | 19,021  | 19,155  | 21,169  | 21,156                                     | 21,126  | 21,259  | 23,521  | 23,507  | 23,477  | 23,610  | 26,279  | 26,265  | 26,236  | 26,369                                                                         |         |  |  |  |  |  |  |  |  |  |  |
|            |            |                             | IDB: Entering Indoor Dry Bulb Temperature |         |         |         |         |         |         |         |         |         |         |         | Shaded area reflects ACCA (TVA) conditions |         |         |         |         |         |         |         |         |         | High and low pressures are measured at the liquid and suction access fittings. |         |  |  |  |  |  |  |  |  |  |  |

|       |            | Outdoor Ambient Temperature |         |         |         |         |         |         |         |         |         |         |         |         |         |         |         |         |         |         |         |         |         |         |         |         |         |         |         |
|-------|------------|-----------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
|       |            | 65                          |         |         |         | 75      |         |         |         | 85      |         |         |         | 95      |         |         |         | 105     |         |         |         | 115     |         |         |         |         |         |         |         |
| IDB   | Airflow    | 59                          | 63      | 67      | 71      | 59      | 63      | 67      | 71      | 59      | 63      | 67      | 71      | 59      | 63      | 67      | 71      | 59      | 63      | 67      | 71      | 59      | 63      | 67      | 71      | 59      | 63      | 67      | 71      |
| 70    | Capacity   | 296,034                     | 300,201 | 309,015 | -       | 293,393 | 297,560 | 306,374 | -       | 285,688 | 289,855 | 298,669 | -       | 272,433 | 276,600 | 285,414 | -       | 256,233 | 260,400 | 269,214 | -       | 241,444 | 245,611 | 254,425 | -       | 232,243 | 236,410 | 245,224 | -       |
|       | S/T        | 0.58                        | 0.51    | 0.38    | -       | 0.58    | 0.51    | 0.39    | -       | 0.61    | 0.54    | 0.41    | -       | 0.62    | 0.55    | 0.43    | -       | 0.64    | 0.57    | 0.45    | -       | 0.67    | 0.60    | 0.47    | -       | 0.69    | 0.62    | 0.50    | -       |
|       | Evap dT    | 20.56                       | 18.63   | 15.02   | -       | 20.51   | 18.58   | 14.97   | -       | 20.78   | 18.85   | 15.24   | -       | 20.49   | 18.56   | 14.95   | -       | 20.23   | 18.30   | 14.69   | -       | 21.44   | 19.51   | 15.90   | -       | 21.44   | 19.51   | 15.90   | -       |
|       | Pr Suc     | 116                         | 117     | 120     | -       | 123     | 124     | 127     | -       | 129     | 130     | 133     | -       | 134     | 136     | 138     | -       | 139     | 141     | 144     | -       | 146     | 147     | 150     | -       | 146     | 147     | 150     | -       |
|       | Pr Dis     | 270                         | 271     | 273     | -       | 313     | 314     | 316     | -       | 357     | 359     | 360     | -       | 405     | 407     | 408     | -       | 457     | 458     | 460     | -       | 512     | 514     | 515     | -       | 512     | 514     | 515     | -       |
|       | TotalPower | 21,453                      | 21,434  | 21,395  | -       | 23,779  | 23,761  | 23,721  | -       | 26,376  | 26,357  | 26,318  | -       | 29,186  | 29,167  | 29,128  | -       | 32,325  | 32,307  | 32,267  | -       | 36,009  | 35,990  | 35,951  | -       | 36,009  | 35,990  | 35,951  | -       |
| 8250  | Capacity   | 298,920                     | 303,087 | 311,901 | -       | 296,279 | 300,446 | 309,260 | -       | 288,574 | 292,741 | 301,555 | -       | 275,319 | 279,486 | 288,300 | -       | 259,119 | 263,286 | 272,100 | -       | 244,330 | 248,497 | 257,311 | -       | 232,243 | 236,410 | 245,224 | -       |
|       | S/T        | 0.61                        | 0.54    | 0.42    | -       | 0.62    | 0.55    | 0.42    | -       | 0.64    | 0.57    | 0.45    | -       | 0.66    | 0.59    | 0.47    | -       | 0.68    | 0.61    | 0.49    | -       | 0.71    | 0.64    | 0.52    | -       | 0.73    | 0.66    | 0.53    | -       |
|       | Evap dT    | 19.74                       | 17.80   | 14.19   | -       | 19.68   | 17.75   | 14.14   | -       | 19.96   | 18.02   | 14.41   | -       | 19.66   | 17.73   | 14.12   | -       | 19.41   | 17.47   | 13.86   | -       | 20.62   | 18.68   | 15.07   | -       | 20.62   | 18.68   | 15.07   | -       |
|       | Pr Suc     | 117                         | 118     | 121     | -       | 124     | 125     | 128     | -       | 130     | 132     | 135     | -       | 135     | 137     | 140     | -       | 140     | 142     | 145     | -       | 147     | 148     | 151     | -       | 147     | 148     | 151     | -       |
|       | Pr Dis     | 272                         | 273     | 275     | -       | 314     | 316     | 318     | -       | 359     | 360     | 362     | -       | 407     | 408     | 410     | -       | 459     | 460     | 462     | -       | 514     | 515     | 517     | -       | 514     | 515     | 517     | -       |
|       | TotalPower | 21,538                      | 21,520  | 21,480  | -       | 23,864  | 23,846  | 23,806  | -       | 26,461  | 26,443  | 26,403  | -       | 29,271  | 29,253  | 29,213  | -       | 32,410  | 32,392  | 32,352  | -       | 36,094  | 36,076  | 36,036  | -       | 36,094  | 36,076  | 36,036  | -       |
| 10000 | Capacity   | 307,364                     | 311,531 | 320,345 | -       | 304,723 | 308,890 | 317,704 | -       | 297,019 | 301,186 | 310,000 | -       | 283,763 | 287,931 | 296,744 | -       | 267,564 | 271,731 | 280,545 | -       | 252,775 | 256,942 | 265,756 | -       | 232,243 | 236,410 | 245,224 | -       |
|       | S/T        | 0.65                        | 0.58    | 0.46    | -       | 0.66    | 0.59    | 0.47    | -       | 0.68    | 0.61    | 0.49    | -       | 0.70    | 0.63    | 0.51    | -       | 0.72    | 0.65    | 0.53    | -       | 0.75    | 0.68    | 0.56    | -       | 0.77    | 0.70    | 0.58    | -       |
|       | Evap dT    | 18.14                       | 16.20   | 12.59   | --      | 18.08   | 16.15   | 12.54   | --      | 18.36   | 16.42   | 12.81   | --      | 18.06   | 16.13   | 12.52   | --      | 17.81   | 15.87   | 12.26   | --      | 19.02   | 17.08   | 13.47   | --      | 19.02   | 17.08   | 13.47   | --      |
|       | Pr Suc     | 120                         | 122     | 125     | -       | 127     | 129     | 132     | -       | 134     | 135     | 138     | -       | 139     | 140     | 143     | -       | 144     | 145     | 148     | -       | 150     | 152     | 155     | -       | 150     | 152     | 155     | -       |
|       | Pr Dis     | 276                         | 277     | 279     | -       | 318     | 319     | 321     | -       | 363     | 364     | 366     | -       | 411     | 412     | 414     | -       | 463     | 464     | 466     | -       | 518     | 519     | 521     | -       | 518     | 519     | 521     | -       |
|       | TotalPower | 21,702                      | 21,684  | 21,644  | -       | 24,028  | 24,010  | 23,970  | -       | 26,625  | 26,607  | 26,567  | -       | 29,435  | 29,417  | 29,377  | -       | 32,575  | 32,556  | 32,517  | -       | 36,258  | 36,240  | 36,200  | -       | 36,258  | 36,240  | 36,200  | -       |
| 75    | Capacity   | 296,206                     | 300,373 | 309,187 | 322,650 | 293,564 | 297,732 | 306,546 | 320,009 | 285,860 | 290,027 | 298,841 | 312,304 | 272,605 | 276,772 | 285,586 | 299,049 | 256,405 | 260,572 | 269,386 | 282,849 | 241,616 | 245,783 | 254,597 | 268,060 | 224,233 | 227,400 | 236,214 | -       |
|       | S/T        | 0.70                        | 0.63    | 0.50    | 0.37    | 0.70    | 0.63    | 0.51    | 0.37    | 0.72    | 0.65    | 0.53    | 0.40    | 1.00    | 0.67    | 0.55    | 0.42    | 1.00    | 0.69    | 0.57    | 0.44    | 1.00    | 0.74    | 0.61    | 0.48    | 1.00    | 0.74    | 0.61    | 0.48    |
|       | Evap dT    | 24.81                       | 22.88   | 19.27   | 15.53   | 24.76   | 22.83   | 19.22   | 15.48   | 25.03   | 23.10   | 19.49   | 15.75   | 24.74   | 22.81   | 19.20   | 15.46   | 24.48   | 22.55   | 18.94   | 15.20   | 25.69   | 23.76   | 20.15   | 16.41   | 25.69   | 23.76   | 20.15   | 16.41   |
|       | Pr Suc     | 116                         | 117     | 120     | 125     | 123     | 124     | 127     | 132     | 129     | 130     | 133     | 138     | 134     | 136     | 139     | 143     | 139     | 141     | 144     | 149     | 146     | 147     | 150     | 155     | 146     | 147     | 150     | 155     |
|       | Pr Dis     | 271                         | 272     | 274     | 278     | 313     | 314     | 316     | 321     | 358     | 359     | 361     | 365     | 406     | 407     | 409     | 413     | 457     | 459     | 460     | 465     | 513     | 514     | 516     | 520     | 513     | 514     | 516     | 520     |
|       | TotalPower | 21,438                      | 21,419  | 21,380  | 21,557  | 23,764  | 23,746  | 23,706  | 23,884  | 26,360  | 26,342  | 26,302  | 26,480  | 29,171  | 29,152  | 29,112  | 29,290  | 32,310  | 32,292  | 32,252  | 32,430  | 35,994  | 35,975  | 35,935  | 36,113  | 35,994  | 35,975  | 35,935  | 36,113  |
| 8250  | Capacity   | 299,092                     | 303,259 | 312,073 | 325,536 | 296,450 | 300,618 | 309,431 | 322,895 | 288,746 | 292,913 | 301,727 | 315,190 | 275,491 | 279,658 | 288,472 | 301,935 | 259,291 | 263,458 | 272,272 | 285,735 | 244,502 | 248,669 | 257,483 | 270,946 | 259,291 | 263,458 | 272,272 | 285,735 |
|       | S/T        | 0.73                        | 0.66    | 0.54    | 0.41    | 0.74    | 0.67    | 0.54    | 0.41    | 0.76    | 0.69    | 0.57    | 0.43    | 1.00    | 0.71    | 0.58    | 0.45    | 1.00    | 0.73    | 0.60    | 0.47    | 1.00    | 0.78    | 0.65    | 0.52    | 1.00    | 0.78    | 0.65    | 0.52    |
|       | Evap dT    | 23.99                       | 22.05   | 18.44   | 14.70   | 23.93   | 22.00   | 18.39   | 14.65   | 24.21   | 22.27   | 18.66   | 14.92   | 23.91   | 21.98   | 18.37   | 14.63   | 23.66   | 21.72   | 18.11   | 14.37   | 24.87   | 22.93   | 19.32   | 15.58   | 24.87   | 22.93   | 19.32   | 15.58   |
|       | Pr Suc     | 117                         | 118     | 121     | 126     | 124     | 125     | 128     | 133     | 130     | 132     | 135     | 139     | 135     | 137     | 140     | 145     | 141     | 142     | 145     | 150     | 147     | 148     | 151     | 156     | 147     | 148     | 151     | 156     |
|       | Pr Dis     | 272                         | 273     | 275     | 280     | 315     | 316     | 318     | 323     | 359     | 360     | 362     | 367     | 407     | 408     | 410     | 415     | 459     | 460     | 462     | 467     | 514     | 515     | 517     | 522     | 514     | 515     | 517     | 522     |
|       | TotalPower | 21,523                      | 21,505  | 21,465  | 21,643  | 23,849  | 23,831  | 23,791  | 23,969  | 26,446  | 26,427  | 26,388  | 26,566  | 29,256  | 29,237  | 29,198  | 29,376  | 32,395  | 32,377  | 32,337  | 32,515  | 36,079  | 36,060  | 36,021  | 36,199  | 36,079  | 36,060  | 36,021  | 36,199  |
| 10000 | Capacity   | 307,536                     | 311,703 | 320,517 | 333,980 | 304,895 | 309,062 | 317,876 | 331,339 | 297,191 | 301,358 | 310,172 | 323,635 | 283,935 | 288,103 | 296,916 | 310,379 | 267,736 | 271,903 | 280,717 | 294,180 | 252,947 | 257,114 | 265,928 | 279,391 | 267,736 | 271,903 | 280,717 | 294,180 |
|       | S/T        | 0.77                        | 0.70    | 0.58    | 0.45    | 0.78    | 0.71    | 0.58    | 0.45    | 1.00    | 0.73    | 0.61    | 0.48    | 1.00    | 0.75    | 0.63    | 0.49    | 1.00    | 0.77    | 0.65    | 0.51    | 1.00    | 0.82    | 0.69    | 0.56    | 1.00    | 0.82    | 0.69    | 0.56    |
|       | Evap dT    | 22.39                       | 20.45   | 16.84   | 13.11   | 22.34   | 20.40   | 16.79   | 13.05   | 22.61   | 20.67   | 17.06   | 13.32   | 22.32   | 20.38   | 16.77   | 13.03   | 22.06   | 20.12   | 16.51   | 12.77   | 23.27   | 21.33   | 17.72   | 13.98   | 23.27   | 21.33   | 17.72   | 13.98   |
|       | Pr Suc     | 120                         | 122     | 125     | 130     | 127     | 129     | 132     | 137     | 134     | 135     | 138     | 143     | 139     | 140     | 143     | 148     | 144     | 145     | 148     | 153     | 150     | 152     | 155     | 160     | 150     | 152     | 155     | 160     |
|       | Pr Dis     | 276                         | 277     | 279     | 284     | 319     | 320     | 322     | 326     | 363     | 364     | 366     | 371     | 411     | 412     | 414     | 419     | 463     | 464     | 466     | 471     | 518     | 519     | 521     | 526     | 518     | 519     | 521     | 526     |
|       | TotalPower | 21,687                      | 21,669  | 21,629  | 21,807  | 24,013  | 23,995  | 23,955  | 24,133  | 26,610  | 26,592  | 26,552  | 26,730  | 29,420  | 29,402  | 29,362  | 29,540  | 32,560  | 32,541  | 32,502  | 32,680  | 36,243  | 36,225  | 36,185  | 36,363  | 36,243  | 36,225  | 36,185  | 36,363  |

|       |            | Outdoor Ambient Temperature               |         |         |         |         |         |         |         |         |         |         |         |                                            |         |         |         |         |         |         |         |         |         |                                                                                |         |      |  |  |  |  |  |  |  |  |  |  |  |
|-------|------------|-------------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|--------------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|--------------------------------------------------------------------------------|---------|------|--|--|--|--|--|--|--|--|--|--|--|
|       |            | 65                                        |         |         |         | 75      |         |         |         | 85      |         |         |         | 95                                         |         |         |         | 105     |         |         |         | 115     |         |                                                                                |         |      |  |  |  |  |  |  |  |  |  |  |  |
| IDB   | Airflow    | 59                                        | 63      | 67      | 71      | 59      | 63      | 67      | 71      | 59      | 63      | 67      | 71      | 59                                         | 63      | 67      | 71      | 59      | 63      | 67      | 71      | 59      | 63      | 67                                                                             | 71      |      |  |  |  |  |  |  |  |  |  |  |  |
| 80    | Capacity   | 297,734                                   | 301,901 | 310,715 | 324,178 | 295,093 | 299,260 | 308,074 | 321,537 | 287,389 | 291,556 | 300,370 | 313,833 | 274,133                                    | 278,301 | 287,114 | 300,577 | 257,934 | 262,101 | 270,915 | 284,378 | 243,145 | 247,312 | 256,126                                                                        | 269,589 |      |  |  |  |  |  |  |  |  |  |  |  |
|       | S/T        | 0.81                                      | 0.74    | 0.62    | 0.48    | 1.00    | 0.75    | 0.62    | 0.49    | 1.00    | 0.77    | 0.64    | 0.51    | 1.00                                       | 0.79    | 0.66    | 0.53    | 1.00    | 0.81    | 0.68    | 0.55    | 1.00    | 1.00    | 1.00                                                                           | 0.73    | 0.60 |  |  |  |  |  |  |  |  |  |  |  |
|       | Evap dT    | 29.09                                     | 27.16   | 23.55   | 19.81   | 29.04   | 27.11   | 23.50   | 19.76   | 29.31   | 27.38   | 23.77   | 20.03   | 29.02                                      | 27.09   | 23.48   | 19.74   | 28.76   | 26.83   | 23.22   | 19.48   | 29.97   | 28.04   | 24.43                                                                          | 20.69   |      |  |  |  |  |  |  |  |  |  |  |  |
|       | Pr Suc     | 116                                       | 118     | 121     | 126     | 123     | 125     | 128     | 133     | 129     | 131     | 134     | 139     | 135                                        | 136     | 139     | 144     | 140     | 141     | 144     | 149     | 146     | 148     | 151                                                                            | 155     |      |  |  |  |  |  |  |  |  |  |  |  |
|       | Pr Dis     | 271                                       | 272     | 274     | 279     | 314     | 315     | 317     | 321     | 358     | 359     | 361     | 366     | 406                                        | 407     | 409     | 414     | 458     | 459     | 461     | 466     | 513     | 514     | 516                                                                            | 521     |      |  |  |  |  |  |  |  |  |  |  |  |
|       | TotalPower | 21,450                                    | 21,432  | 21,392  | 21,570  | 23,776  | 23,758  | 23,718  | 23,896  | 26,373  | 26,354  | 26,315  | 26,493  | 29,183                                     | 29,164  | 29,125  | 29,303  | 32,322  | 32,304  | 32,264  | 32,442  | 36,006  | 35,988  | 35,948                                                                         | 36,126  |      |  |  |  |  |  |  |  |  |  |  |  |
| 8250  | Capacity   | 300,620                                   | 304,787 | 313,601 | 327,064 | 297,979 | 302,146 | 310,960 | 324,423 | 290,275 | 294,442 | 303,256 | 316,719 | 277,019                                    | 281,187 | 290,000 | 303,463 | 260,820 | 264,987 | 273,801 | 287,264 | 246,031 | 250,198 | 259,012                                                                        | 272,475 |      |  |  |  |  |  |  |  |  |  |  |  |
|       | S/T        | 0.85                                      | 0.78    | 0.65    | 0.52    | 1.00    | 0.78    | 0.66    | 0.53    | 1.00    | 0.81    | 0.68    | 0.55    | 1.00                                       | 0.83    | 0.70    | 0.57    | 1.00    | 0.85    | 0.72    | 0.59    | 1.00    | 1.00    | 1.00                                                                           | 0.77    | 0.64 |  |  |  |  |  |  |  |  |  |  |  |
|       | Evap dT    | 28.27                                     | 26.33   | 22.72   | 18.98   | 28.21   | 26.28   | 22.67   | 18.93   | 28.49   | 26.55   | 22.94   | 19.20   | 28.19                                      | 26.26   | 22.65   | 18.91   | 27.94   | 26.00   | 22.39   | 18.65   | 29.15   | 27.21   | 23.60                                                                          | 19.86   |      |  |  |  |  |  |  |  |  |  |  |  |
|       | Pr Suc     | 118                                       | 119     | 122     | 127     | 125     | 126     | 129     | 134     | 131     | 132     | 135     | 140     | 136                                        | 137     | 140     | 145     | 141     | 142     | 145     | 150     | 147     | 149     | 152                                                                            | 157     |      |  |  |  |  |  |  |  |  |  |  |  |
|       | Pr Dis     | 273                                       | 274     | 276     | 280     | 315     | 316     | 318     | 323     | 360     | 361     | 363     | 368     | 408                                        | 409     | 411     | 416     | 460     | 461     | 463     | 467     | 515     | 516     | 518                                                                            | 523     |      |  |  |  |  |  |  |  |  |  |  |  |
|       | TotalPower | 21,535                                    | 21,517  | 21,477  | 21,655  | 23,861  | 23,843  | 23,803  | 23,981  | 26,458  | 26,440  | 26,400  | 26,578  | 29,268                                     | 29,250  | 29,210  | 29,388  | 32,408  | 32,389  | 32,350  | 32,527  | 36,091  | 36,073  | 36,033                                                                         | 36,211  |      |  |  |  |  |  |  |  |  |  |  |  |
| 10000 | Capacity   | 309,065                                   | 313,232 | 322,046 | 335,509 | 306,423 | 310,591 | 319,404 | 332,868 | 298,719 | 302,886 | 311,700 | 325,163 | 285,464                                    | 289,631 | 298,445 | 311,908 | 269,264 | 273,431 | 282,245 | 295,708 | 254,475 | 258,642 | 267,456                                                                        | 280,919 |      |  |  |  |  |  |  |  |  |  |  |  |
|       | S/T        | 0.89                                      | 0.82    | 0.69    | 0.56    | 1.00    | 0.82    | 0.70    | 0.57    | 1.00    | 0.85    | 0.72    | 0.59    | 1.00                                       | 0.87    | 0.74    | 0.61    | 1.00    | 1.00    | 0.76    | 0.63    | 1.00    | 1.00    | 1.00                                                                           | 0.81    | 0.68 |  |  |  |  |  |  |  |  |  |  |  |
|       | Evap dT    | 26.67                                     | 24.73   | 21.12   | 17.38   | 26.61   | 24.68   | 21.07   | 17.33   | 26.89   | 24.95   | 21.34   | 17.60   | 26.59                                      | 24.66   | 21.05   | 17.31   | 26.34   | 24.40   | 20.79   | 17.05   | 27.55   | 25.61   | 22.00                                                                          | 18.26   |      |  |  |  |  |  |  |  |  |  |  |  |
|       | Pr Suc     | 121                                       | 122     | 125     | 130     | 128     | 129     | 132     | 137     | 134     | 135     | 138     | 143     | 139                                        | 141     | 144     | 149     | 144     | 146     | 149     | 154     | 151     | 152     | 155                                                                            | 160     |      |  |  |  |  |  |  |  |  |  |  |  |
|       | Pr Dis     | 276                                       | 278     | 280     | 284     | 319     | 320     | 322     | 327     | 364     | 365     | 367     | 371     | 412                                        | 413     | 415     | 419     | 463     | 465     | 466     | 471     | 519     | 520     | 522                                                                            | 526     |      |  |  |  |  |  |  |  |  |  |  |  |
|       | TotalPower | 21,699                                    | 21,681  | 21,641  | 21,819  | 24,026  | 24,007  | 23,968  | 24,145  | 26,622  | 26,604  | 26,564  | 26,742  | 29,432                                     | 29,414  | 29,374  | 29,552  | 32,572  | 32,554  | 32,514  | 32,692  | 36,255  | 36,237  | 36,197                                                                         | 36,375  |      |  |  |  |  |  |  |  |  |  |  |  |
| 85    | Capacity   | 302,705                                   | 306,873 | 315,686 | 329,149 | 300,064 | 304,232 | 313,045 | 326,508 | 292,360 | 296,527 | 305,341 | 318,804 | 279,105                                    | 283,272 | 292,086 | 305,549 | 262,905 | 267,072 | 275,886 | 289,349 | 248,116 | 252,283 | 261,097                                                                        | 274,560 |      |  |  |  |  |  |  |  |  |  |  |  |
|       | S/T        | 1.00                                      | 0.83    | 0.71    | 0.58    | 1.00    | 0.84    | 0.72    | 0.58    | 1.00    | 0.86    | 0.74    | 0.61    | 1.00                                       | 1.00    | 0.76    | 0.62    | 1.00    | 1.00    | 0.78    | 0.64    | 1.00    | 1.00    | 1.00                                                                           | 0.82    | 0.69 |  |  |  |  |  |  |  |  |  |  |  |
|       | Evap dT    | 32.89                                     | 30.95   | 27.35   | 23.61   | 32.84   | 30.90   | 27.29   | 23.55   | 33.11   | 31.17   | 27.56   | 23.82   | 32.82                                      | 30.88   | 27.27   | 23.53   | 32.56   | 30.62   | 27.01   | 23.27   | 33.77   | 31.83   | 28.22                                                                          | 24.48   |      |  |  |  |  |  |  |  |  |  |  |  |
|       | Pr Suc     | 118                                       | 119     | 122     | 127     | 125     | 126     | 129     | 134     | 131     | 133     | 136     | 140     | 136                                        | 138     | 141     | 146     | 142     | 143     | 146     | 151     | 148     | 149     | 152                                                                            | 157     |      |  |  |  |  |  |  |  |  |  |  |  |
|       | Pr Dis     | 272                                       | 273     | 275     | 280     | 315     | 316     | 318     | 323     | 359     | 361     | 362     | 367     | 407                                        | 409     | 410     | 415     | 459     | 460     | 462     | 467     | 514     | 516     | 517                                                                            | 522     |      |  |  |  |  |  |  |  |  |  |  |  |
|       | TotalPower | 21,494                                    | 21,476  | 21,436  | 21,614  | 23,821  | 23,802  | 23,762  | 23,940  | 26,417  | 26,399  | 26,359  | 26,537  | 29,227                                     | 29,209  | 29,169  | 29,347  | 32,367  | 32,349  | 32,309  | 32,487  | 36,050  | 36,032  | 35,992                                                                         | 36,170  |      |  |  |  |  |  |  |  |  |  |  |  |
| 8250  | Capacity   | 305,591                                   | 309,759 | 318,572 | 332,035 | 302,950 | 307,118 | 315,931 | 329,394 | 295,246 | 299,413 | 308,227 | 321,690 | 281,991                                    | 286,158 | 294,972 | 308,435 | 265,791 | 269,958 | 278,772 | 292,235 | 251,002 | 255,169 | 263,983                                                                        | 277,446 |      |  |  |  |  |  |  |  |  |  |  |  |
|       | S/T        | 1.00                                      | 0.87    | 0.75    | 0.62    | 1.00    | 0.88    | 0.75    | 0.62    | 1.00    | 0.90    | 0.78    | 0.64    | 1.00                                       | 1.00    | 0.79    | 0.66    | 1.00    | 1.00    | 0.81    | 0.68    | 1.000   | 1.000   | 0.861                                                                          | 0.730   |      |  |  |  |  |  |  |  |  |  |  |  |
|       | Evap dT    | 32.06                                     | 30.13   | 26.52   | 22.78   | 32.01   | 30.08   | 26.47   | 22.73   | 32.28   | 30.35   | 26.74   | 23.00   | 31.99                                      | 30.06   | 26.45   | 22.71   | 31.73   | 29.80   | 26.19   | 22.45   | 32.94   | 31.01   | 27.40                                                                          | 23.66   |      |  |  |  |  |  |  |  |  |  |  |  |
|       | Pr Suc     | 119                                       | 121     | 124     | 129     | 126     | 128     | 131     | 136     | 132     | 134     | 137     | 142     | 138                                        | 139     | 142     | 147     | 143     | 144     | 147     | 152     | 149     | 151     | 153                                                                            | 158     |      |  |  |  |  |  |  |  |  |  |  |  |
|       | Pr Dis     | 274                                       | 275     | 277     | 282     | 317     | 318     | 320     | 324     | 361     | 362     | 364     | 369     | 409                                        | 410     | 412     | 417     | 461     | 462     | 464     | 469     | 516     | 517     | 519                                                                            | 524     |      |  |  |  |  |  |  |  |  |  |  |  |
|       | TotalPower | 21,580                                    | 21,561  | 21,522  | 21,699  | 23,906  | 23,887  | 23,848  | 24,026  | 26,502  | 26,484  | 26,444  | 26,622  | 29,312                                     | 29,294  | 29,254  | 29,432  | 32,452  | 32,434  | 32,394  | 32,572  | 36,136  | 36,117  | 36,077                                                                         | 36,255  |      |  |  |  |  |  |  |  |  |  |  |  |
| 10000 | Capacity   | 314,036                                   | 318,203 | 327,017 | 340,480 | 311,395 | 315,562 | 324,376 | 337,839 | 303,690 | 307,858 | 316,671 | 330,134 | 290,435                                    | 294,602 | 303,416 | 316,879 | 274,236 | 278,403 | 287,217 | 300,680 | 259,447 | 263,614 | 272,428                                                                        | 285,891 |      |  |  |  |  |  |  |  |  |  |  |  |
|       | S/T        | 1.00                                      | 0.91    | 0.79    | 0.66    | 1.00    | 0.92    | 0.79    | 0.66    | 1.00    | 1.00    | 0.82    | 0.68    | 1.00                                       | 1.00    | 0.83    | 0.70    | 1.00    | 1.00    | 0.85    | 0.72    | 1.00    | 1.00    | 0.90                                                                           | 0.77    |      |  |  |  |  |  |  |  |  |  |  |  |
|       | Evap dT    | 30.46                                     | 28.53   | 24.92   | 21.18   | 30.41   | 28.48   | 24.87   | 21.13   | 30.68   | 28.75   | 25.14   | 21.40   | 30.39                                      | 28.46   | 24.85   | 21.11   | 30.13   | 28.20   | 24.59   | 20.85   | 31.34   | 29.41   | 25.80                                                                          | 22.06   |      |  |  |  |  |  |  |  |  |  |  |  |
|       | Pr Suc     | 123                                       | 124     | 127     | 132     | 130     | 131     | 134     | 139     | 136     | 137     | 140     | 145     | 141                                        | 142     | 145     | 150     | 146     | 148     | 150     | 155     | 152     | 154     | 157                                                                            | 162     |      |  |  |  |  |  |  |  |  |  |  |  |
|       | Pr Dis     | 278                                       | 279     | 281     | 286     | 320     | 321     | 323     | 328     | 365     | 366     | 368     | 373     | 413                                        | 414     | 416     | 421     | 465     | 466     | 468     | 472     | 520     | 521     | 523                                                                            | 528     |      |  |  |  |  |  |  |  |  |  |  |  |
|       | TotalPower | 21,744                                    | 21,726  | 21,686  | 21,864  | 24,070  | 24,052  | 24,012  | 24,190  | 26,667  | 26,648  | 26,609  | 26,787  | 29,477                                     | 29,458  | 29,419  | 29,597  | 32,616  | 32,598  | 32,558  | 32,736  | 36,300  | 36,282  | 36,242                                                                         | 36,420  |      |  |  |  |  |  |  |  |  |  |  |  |
|       |            | IDB: Entering Indoor Dry Bulb Temperature |         |         |         |         |         |         |         |         |         |         |         | Shaded area reflects ACCA (TVA) conditions |         |         |         |         |         |         |         |         |         | High and low pressures are measured at the liquid and suction access fittings. |         |      |  |  |  |  |  |  |  |  |  |  |  |

| DFC1803W HIGH STATIC |        |         |       |       |       |       |
|----------------------|--------|---------|-------|-------|-------|-------|
| SPEED TAP            | STATIC | AIRFLOW | RPM 1 | RPM 2 | BHP 1 | BHP 2 |
| T1                   | 0.2    | 6622    | 626   | 626   | 0.25  | 0.25  |
|                      | 0.4    | 6195    | 666   | 667   | 0.27  | 0.27  |
|                      | 0.6    | 5791    | 709   | 706   | 0.28  | 0.28  |
|                      | 0.8    | 5392    | 749   | 748   | 0.30  | 0.30  |
|                      | 1      | 4960    | 789   | 792   | 0.31  | 0.32  |
|                      | 1.2    | 4503    | 836   | 836   | 0.33  | 0.33  |
|                      | 1.4    | 3515    | 956   | 911   | 0.38  | 0.36  |
|                      | 1.6    | 2887    | 998   | 978   | 0.40  | 0.39  |
|                      | 1.8    | 2360    | 1047  | 1020  | 0.42  | 0.41  |
|                      | 2      | 1807    | 1082  | 1067  | 0.43  | 0.43  |
| T2                   | 2.2    | 1305    | 1109  | 1103  | 0.44  | 0.44  |
|                      | 0.2    | 6622    | 626   | 626   | 0.25  | 0.25  |
|                      | 0.4    | 6195    | 666   | 667   | 0.27  | 0.27  |
|                      | 0.6    | 5791    | 709   | 706   | 0.28  | 0.28  |
|                      | 0.8    | 5392    | 749   | 748   | 0.30  | 0.30  |
|                      | 1      | 4960    | 789   | 792   | 0.31  | 0.32  |
|                      | 1.2    | 4503    | 836   | 836   | 0.33  | 0.33  |
|                      | 1.4    | 3515    | 956   | 911   | 0.38  | 0.36  |
|                      | 1.6    | 2887    | 998   | 978   | 0.40  | 0.39  |
|                      | 1.8    | 2360    | 1047  | 1020  | 0.42  | 0.41  |
| T3                   | 2      | 1807    | 1082  | 1067  | 0.43  | 0.43  |
|                      | 2.2    | 1305    | 1109  | 1103  | 0.44  | 0.44  |
|                      | 0.2    | 8201    | 738   | 736   | 0.84  | 0.84  |
|                      | 0.4    | 7841    | 776   | 774   | 0.89  | 0.88  |
|                      | 0.6    | 7516    | 814   | 811   | 0.93  | 0.93  |
|                      | 0.8    | 7185    | 852   | 849   | 0.97  | 0.97  |
|                      | 1      | 6864    | 887   | 885   | 1.01  | 1.01  |
|                      | 1.2    | 6517    | 926   | 923   | 1.06  | 1.05  |
|                      | 1.4    | 5970    | 991   | 973   | 1.13  | 1.11  |
|                      | 1.6    | 5502    | 1033  | 1020  | 1.18  | 1.16  |
| T4                   | 1.8    | 5050    | 1082  | 1059  | 1.24  | 1.21  |
|                      | 2      | 4609    | 1122  | 1101  | 1.28  | 1.26  |
|                      | 2.2    | 4136    | 1164  | 1141  | 1.33  | 1.30  |
|                      | 0.2    | 8778    | 780   | 776   | 1.12  | 1.12  |
|                      | 0.4    | 8441    | 816   | 813   | 1.17  | 1.17  |
|                      | 0.6    | 8141    | 852   | 850   | 1.23  | 1.22  |
|                      | 0.8    | 7832    | 889   | 887   | 1.28  | 1.28  |
|                      | 1      | 7543    | 924   | 921   | 1.33  | 1.32  |
|                      | 1.2    | 7231    | 960   | 957   | 1.38  | 1.38  |
|                      | 1.4    | 6814    | 1009  | 998   | 1.45  | 1.44  |
|                      | 1.6    | 6401    | 1051  | 1039  | 1.51  | 1.50  |
|                      | 1.8    | 5980    | 1098  | 1077  | 1.58  | 1.55  |
|                      | 2      | 5580    | 1139  | 1117  | 1.64  | 1.61  |
|                      | 2.2    | 5126    | 1184  | 1157  | 1.70  | 1.67  |

| DFC1803W HIGH STATIC |        |         |       |       |       |       |
|----------------------|--------|---------|-------|-------|-------|-------|
| SPEED TAP            | STATIC | AIRFLOW | RPM 1 | RPM 2 | BHP 1 | BHP 2 |
| T5                   | 0.2    | 9286    | 816   | 811   | 1.40  | 1.39  |
|                      | 0.4    | 8969    | 851   | 848   | 1.46  | 1.46  |
|                      | 0.6    | 8688    | 886   | 884   | 1.52  | 1.52  |
|                      | 0.8    | 8398    | 923   | 920   | 1.58  | 1.58  |
|                      | 1      | 8132    | 956   | 952   | 1.64  | 1.63  |
|                      | 1.2    | 7849    | 990   | 987   | 1.70  | 1.69  |
|                      | 1.4    | 7530    | 1028  | 1022  | 1.76  | 1.75  |
|                      | 1.6    | 7162    | 1068  | 1059  | 1.83  | 1.82  |
|                      | 1.8    | 6771    | 1114  | 1096  | 1.91  | 1.88  |
|                      | 2      | 6407    | 1155  | 1134  | 1.98  | 1.95  |
| T6                   | 2.2    | 5974    | 1201  | 1173  | 2.06  | 2.01  |
|                      | 0.2    | 8163    | 925   | 854   | 1.33  | 1.23  |
|                      | 0.4    | 7902    | 953   | 880   | 1.37  | 1.27  |
|                      | 0.6    | 7642    | 979   | 913   | 1.41  | 1.31  |
|                      | 0.8    | 7399    | 1006  | 944   | 1.45  | 1.36  |
|                      | 1      | 7146    | 1033  | 976   | 1.49  | 1.41  |
|                      | 1.2    | 6893    | 1061  | 1010  | 1.53  | 1.45  |
|                      | 1.4    | 6626    | 1090  | 1047  | 1.57  | 1.51  |
|                      | 1.6    | 6349    | 1122  | 1082  | 1.61  | 1.56  |
|                      | 1.8    | 6035    | 1154  | 1118  | 1.66  | 1.61  |
| T7                   | 2      | 5765    | 1184  | 1148  | 1.70  | 1.65  |
|                      | 2.2    | 5401    | 1215  | 1189  | 1.75  | 1.71  |
|                      | 0.2    | 9129    | 805   | 800   | 2.63  | 1.63  |
|                      | 0.4    | 8806    | 840   | 837   | 2.75  | 1.71  |
|                      | 0.6    | 8519    | 876   | 873   | 2.86  | 1.78  |
|                      | 0.8    | 8224    | 912   | 910   | 2.98  | 1.86  |
|                      | 1      | 7951    | 946   | 942   | 3.09  | 1.92  |
|                      | 1.2    | 7659    | 981   | 977   | 3.21  | 1.99  |
|                      | 1.4    | 7312    | 1022  | 1015  | 3.34  | 2.07  |
|                      | 1.6    | 6930    | 1063  | 1053  | 3.47  | 2.15  |
| T8                   | 1.8    | 6530    | 1109  | 1090  | 3.62  | 2.22  |
|                      | 2      | 6154    | 1150  | 1128  | 3.76  | 2.30  |
|                      | 2.2    | 5715    | 1196  | 1168  | 3.91  | 2.38  |
|                      | 0.2    | 9286    | 816   | 811   | 2.67  | 1.65  |
|                      | 0.4    | 8969    | 851   | 848   | 2.78  | 1.73  |
|                      | 0.6    | 8688    | 886   | 884   | 2.90  | 1.80  |
|                      | 0.8    | 8398    | 923   | 920   | 3.02  | 1.88  |
|                      | 1      | 8132    | 956   | 952   | 3.12  | 1.94  |
|                      | 1.2    | 7849    | 990   | 987   | 3.24  | 2.01  |
|                      | 1.4    | 7530    | 1028  | 1022  | 3.36  | 2.08  |
|                      | 1.6    | 7162    | 1068  | 1059  | 3.49  | 2.16  |
|                      | 1.8    | 6771    | 1114  | 1096  | 3.64  | 2.23  |
|                      | 2      | 6407    | 1155  | 1134  | 3.78  | 2.31  |
|                      | 2.2    | 5974    | 1201  | 1173  | 3.93  | 2.39  |

| DFC1803W HIGH STATIC |        |         |       |       |       |       |
|----------------------|--------|---------|-------|-------|-------|-------|
| SPEED TAP            | STATIC | AIRFLOW | RPM 1 | RPM 2 | BHP 1 | BHP 2 |
| T9                   | 0.2    | 9405    | 825   | 820   | 2.70  | 1.67  |
|                      | 0.4    | 9091    | 860   | 856   | 2.81  | 1.75  |
|                      | 0.6    | 8815    | 894   | 892   | 2.92  | 1.82  |
|                      | 0.8    | 8529    | 930   | 928   | 3.04  | 1.89  |
|                      | 1      | 8268    | 963   | 960   | 3.15  | 1.96  |
|                      | 1.2    | 7991    | 997   | 994   | 3.26  | 2.03  |
|                      | 1.4    | 7692    | 1033  | 1028  | 3.38  | 2.10  |
|                      | 1.6    | 7334    | 1073  | 1064  | 3.51  | 2.17  |
|                      | 1.8    | 6951    | 1118  | 1100  | 3.65  | 2.24  |
|                      | 2      | 6595    | 1159  | 1138  | 3.79  | 2.32  |
| T10                  | 2.2    | 6168    | 1205  | 1177  | 3.94  | 2.40  |
|                      | 0.2    | 9495    | 831   | 826   | 2.72  | 1.68  |
|                      | 0.4    | 9185    | 866   | 862   | 2.83  | 1.76  |
|                      | 0.6    | 8911    | 901   | 898   | 2.94  | 1.83  |
|                      | 0.8    | 8629    | 936   | 934   | 3.06  | 1.90  |
|                      | 1      | 8371    | 969   | 965   | 3.17  | 1.97  |
|                      | 1.2    | 8098    | 1003  | 999   | 3.28  | 2.04  |
|                      | 1.4    | 7814    | 1037  | 1033  | 3.39  | 2.11  |
|                      | 1.6    | 7464    | 1076  | 1068  | 3.52  | 2.18  |
|                      | 1.8    | 7086    | 1121  | 1104  | 3.66  | 2.25  |
|                      | 2      | 6737    | 1162  | 1141  | 3.80  | 2.33  |
|                      | 2.2    | 6314    | 1208  | 1180  | 3.95  | 2.41  |

| DFC2403W HIGH STATIC |        |         |       |       |       |       |
|----------------------|--------|---------|-------|-------|-------|-------|
| SPEED TAP            | STATIC | AIRFLOW | RPM 1 | RPM 2 | BHP 1 | BHP 2 |
| T1                   | 0.2    | 6412    | 631   | 616   | 0.71  | 0.69  |
|                      | 0.4    | 6081    | 683   | 673   | 0.77  | 0.76  |
|                      | 0.6    | 5697    | 729   | 745   | 0.82  | 0.84  |
|                      | 0.8    | 5360    | 778   | 796   | 0.88  | 0.90  |
|                      | 1      | 4895    | 846   | 859   | 0.95  | 0.97  |
|                      | 1.2    | 4519    | 884   | 900   | 1.00  | 1.01  |
|                      | 1.4    | 4139    | 927   | 948   | 1.04  | 1.07  |
|                      | 1.6    | 3635    | 987   | 981   | 1.11  | 1.10  |
|                      | 1.8    | 3278    | 1034  | 1012  | 1.16  | 1.14  |
|                      | 2      | 2968    | 1070  | 1043  | 1.21  | 1.18  |
| T2                   | 2.2    | 2662    | 1098  | 1083  | 1.24  | 1.22  |
|                      | 0.2    | 6797    | 651   | 632   | 0.81  | 0.79  |
|                      | 0.4    | 6471    | 700   | 688   | 0.88  | 0.86  |
|                      | 0.6    | 6099    | 746   | 753   | 0.93  | 0.94  |
|                      | 0.8    | 5784    | 793   | 804   | 0.99  | 1.00  |
|                      | 1      | 5368    | 855   | 868   | 1.07  | 1.08  |
|                      | 1.2    | 5006    | 893   | 911   | 1.12  | 1.14  |
|                      | 1.4    | 4638    | 934   | 962   | 1.17  | 1.20  |
|                      | 1.6    | 4160    | 992   | 997   | 1.24  | 1.25  |
|                      | 1.8    | 3810    | 1039  | 1029  | 1.30  | 1.29  |
| T3                   | 2      | 3510    | 1076  | 1060  | 1.34  | 1.33  |
|                      | 2.2    | 3192    | 1106  | 1099  | 1.38  | 1.37  |
|                      | 0.2    | 9468    | 859   | 811   | 1.95  | 1.84  |
|                      | 0.4    | 9181    | 894   | 850   | 2.03  | 1.93  |
|                      | 0.6    | 8911    | 930   | 878   | 2.11  | 1.99  |
|                      | 0.8    | 8724    | 966   | 925   | 2.19  | 2.10  |
|                      | 1      | 8554    | 992   | 980   | 2.25  | 2.22  |
|                      | 1.2    | 8298    | 1025  | 1027  | 2.33  | 2.33  |
|                      | 1.4    | 8015    | 1054  | 1082  | 2.39  | 2.45  |
|                      | 1.6    | 7718    | 1094  | 1128  | 2.48  | 2.56  |
| T4                   | 1.8    | 7441    | 1133  | 1158  | 2.57  | 2.63  |
|                      | 2      | 7210    | 1171  | 1189  | 2.66  | 2.70  |
|                      | 2.2    | 6884    | 1209  | 1218  | 2.74  | 2.76  |
|                      | 0.2    | 9881    | 909   | 854   | 2.24  | 2.11  |
|                      | 0.4    | 9602    | 941   | 890   | 2.32  | 2.20  |
|                      | 0.6    | 9353    | 976   | 915   | 2.41  | 2.26  |
|                      | 0.8    | 9179    | 1008  | 959   | 2.49  | 2.37  |
|                      | 1      | 9025    | 1032  | 1009  | 2.55  | 2.49  |
|                      | 1.2    | 8787    | 1063  | 1055  | 2.62  | 2.60  |
|                      | 1.4    | 8519    | 1090  | 1107  | 2.69  | 2.73  |
| T4                   | 1.6    | 8248    | 1127  | 1151  | 2.78  | 2.84  |
|                      | 1.8    | 7989    | 1163  | 1181  | 2.87  | 2.92  |
|                      | 2      | 7770    | 1199  | 1211  | 2.96  | 2.99  |
|                      | 2.2    | 7460    | 1237  | 1239  | 3.05  | 3.06  |

| DFC2403W HIGH STATIC |        |         |       |       |       |       |
|----------------------|--------|---------|-------|-------|-------|-------|
| SPEED TAP            | STATIC | AIRFLOW | RPM 1 | RPM 2 | BHP 1 | BHP 2 |
| T5                   | 0.2    | 10268   | 963   | 902   | 2.58  | 2.41  |
|                      | 0.4    | 9996    | 993   | 935   | 2.66  | 2.50  |
|                      | 0.6    | 9769    | 1025  | 957   | 2.74  | 2.56  |
|                      | 0.8    | 9604    | 1055  | 997   | 2.82  | 2.67  |
|                      | 1      | 9456    | 1077  | 1042  | 2.88  | 2.79  |
|                      | 1.2    | 9235    | 1106  | 1084  | 2.96  | 2.90  |
|                      | 1.4    | 8983    | 1132  | 1133  | 3.03  | 3.03  |
|                      | 1.6    | 8736    | 1164  | 1175  | 3.11  | 3.14  |
|                      | 1.8    | 8496    | 1197  | 1204  | 3.20  | 3.22  |
|                      | 2      | 8288    | 1232  | 1233  | 3.29  | 3.30  |
| T6                   | 2.2    | 8001    | 1267  | 1259  | 3.39  | 3.37  |
|                      | 0.2    | 9125    | 822   | 779   | 1.74  | 1.65  |
|                      | 0.4    | 8832    | 860   | 821   | 1.82  | 1.74  |
|                      | 0.6    | 8546    | 898   | 852   | 1.90  | 1.80  |
|                      | 0.8    | 8348    | 935   | 901   | 1.98  | 1.91  |
|                      | 1      | 8158    | 964   | 958   | 2.04  | 2.03  |
|                      | 1.2    | 7887    | 998   | 1007  | 2.11  | 2.13  |
|                      | 1.4    | 7592    | 1029  | 1063  | 2.18  | 2.25  |
|                      | 1.6    | 7272    | 1072  | 1109  | 2.27  | 2.35  |
|                      | 1.8    | -       | -     | -     | -     | -     |
| T7                   | 2      | -       | -     | -     | -     | -     |
|                      | 2.2    | -       | -     | -     | -     | -     |
|                      | 0.2    | 9412    | 852   | 805   | 1.91  | 1.81  |
|                      | 0.4    | 9124    | 888   | 845   | 1.99  | 1.90  |
|                      | 0.6    | 8851    | 925   | 874   | 2.08  | 1.96  |
|                      | 0.8    | 8663    | 960   | 920   | 2.15  | 2.07  |
|                      | 1      | 8490    | 987   | 976   | 2.22  | 2.19  |
|                      | 1.2    | 8232    | 1020  | 1024  | 2.29  | 2.30  |
|                      | 1.4    | 7947    | 1050  | 1079  | 2.36  | 2.42  |
|                      | 1.6    | 7646    | 1090  | 1124  | 2.45  | 2.52  |
| T8                   | 1.8    | 7366    | 1129  | 1155  | 2.53  | 2.59  |
|                      | 2      | 7134    | 1168  | 1186  | 2.62  | 2.66  |
|                      | 2.2    | -       | -     | -     | -     | -     |
|                      | 0.2    | 9695    | 885   | 834   | 2.10  | 1.98  |
|                      | 0.4    | 9412    | 919   | 871   | 2.19  | 2.07  |
|                      | 0.6    | 9153    | 954   | 897   | 2.27  | 2.13  |
|                      | 0.8    | 8974    | 988   | 942   | 2.35  | 2.24  |
|                      | 1      | 8814    | 1013  | 995   | 2.41  | 2.37  |
|                      | 1.2    | 8568    | 1045  | 1042  | 2.48  | 2.48  |
|                      | 1.4    | 8293    | 1073  | 1095  | 2.55  | 2.60  |
| T8                   | 1.6    | 8010    | 1111  | 1140  | 2.64  | 2.71  |
|                      | 1.8    | 7743    | 1148  | 1170  | 2.73  | 2.78  |
|                      | 2      | 7518    | 1186  | 1201  | 2.82  | 2.86  |
|                      | 2.2    | 7200    | 1223  | 1229  | 2.91  | 2.92  |

| DFC2403W HIGH STATIC |        |         |       |       |       |       |
|----------------------|--------|---------|-------|-------|-------|-------|
| SPEED TAP            | STATIC | AIRFLOW | RPM 1 | RPM 2 | BHP 1 | BHP 2 |
| T9                   | 0.2    | 9881    | 909   | 854   | 2.29  | 2.16  |
|                      | 0.4    | 9602    | 941   | 890   | 2.38  | 2.25  |
|                      | 0.6    | 9353    | 976   | 915   | 2.46  | 2.31  |
|                      | 0.8    | 9179    | 1008  | 959   | 2.55  | 2.42  |
|                      | 1      | 9025    | 1032  | 1009  | 2.61  | 2.55  |
|                      | 1.2    | 8787    | 1063  | 1055  | 2.68  | 2.66  |
|                      | 1.4    | 8519    | 1090  | 1107  | 2.75  | 2.79  |
|                      | 1.6    | 8248    | 1127  | 1151  | 2.85  | 2.91  |
|                      | 1.8    | 7989    | 1163  | 1181  | 2.94  | 2.98  |
|                      | 2      | 7770    | 1199  | 1211  | 3.03  | 3.06  |
| T10                  | 2.2    | 7460    | 1237  | 1239  | 3.12  | 3.13  |
|                      | 0.2    | 10268   | 963   | 902   | 2.58  | 2.05  |
|                      | 0.4    | 9996    | 993   | 935   | 2.66  | 2.12  |
|                      | 0.6    | 9769    | 1025  | 957   | 2.74  | 2.17  |
|                      | 0.8    | 9604    | 1055  | 997   | 2.82  | 2.26  |
|                      | 1      | 9456    | 1077  | 1042  | 2.88  | 2.37  |
|                      | 1.2    | 9235    | 1106  | 1084  | 2.96  | 2.46  |
|                      | 1.4    | 8983    | 1132  | 1133  | 3.03  | 2.57  |
|                      | 1.6    | 8736    | 1164  | 1175  | 3.11  | 2.67  |
|                      | 1.8    | 8496    | 1197  | 1204  | 3.20  | 2.73  |
|                      | 2      | 8288    | 1232  | 1233  | 3.29  | 2.80  |
|                      | 2.2    | 8001    | 1267  | 1259  | 3.39  | 2.86  |

| DFC3003W HIGH STATIC |        |         |       |       |       |       |
|----------------------|--------|---------|-------|-------|-------|-------|
| SPEED TAP            | STATIC | AIRFLOW | RPM 1 | RPM 2 | BHP 1 | BHP 2 |
| T1                   | 0.2    | 7629    | 701   | 674   | 1.07  | 1.03  |
|                      | 0.4    | 7314    | 746   | 725   | 1.14  | 1.11  |
|                      | 0.6    | 6969    | 789   | 777   | 1.21  | 1.19  |
|                      | 0.8    | 6701    | 833   | 829   | 1.28  | 1.27  |
|                      | 1      | 6380    | 882   | 892   | 1.35  | 1.37  |
|                      | 1.2    | 6049    | 919   | 939   | 1.41  | 1.44  |
|                      | 1.4    | 5706    | 956   | 994   | 1.46  | 1.52  |
|                      | 1.6    | 5285    | 1010  | 1035  | 1.55  | 1.58  |
|                      | 1.8    | 4952    | 1055  | 1066  | 1.62  | 1.63  |
|                      | 2      | 4673    | 1094  | 1098  | 1.68  | 1.68  |
| T2                   | 2.2    | 4339    | 1128  | 1134  | 1.73  | 1.74  |
|                      | 0.2    | 7900    | 719   | 690   | 1.17  | 1.12  |
|                      | 0.4    | 7588    | 763   | 739   | 1.24  | 1.20  |
|                      | 0.6    | 7253    | 805   | 787   | 1.31  | 1.28  |
|                      | 0.8    | 6999    | 848   | 839   | 1.38  | 1.37  |
|                      | 1      | 6706    | 893   | 902   | 1.45  | 1.47  |
|                      | 1.2    | 6386    | 929   | 949   | 1.51  | 1.55  |
|                      | 1.4    | 6051    | 966   | 1005  | 1.57  | 1.64  |
|                      | 1.6    | 5649    | 1018  | 1048  | 1.66  | 1.71  |
|                      | 1.8    | 5322    | 1063  | 1079  | 1.73  | 1.76  |
| T3                   | 2      | 5050    | 1102  | 1111  | 1.79  | 1.81  |
|                      | 2.2    | 4712    | 1137  | 1146  | 1.85  | 1.87  |
|                      | 0.2    | 9468    | 859   | 811   | 1.95  | 1.84  |
|                      | 0.4    | 9181    | 894   | 850   | 2.03  | 1.93  |
|                      | 0.6    | 8911    | 930   | 878   | 2.11  | 1.99  |
|                      | 0.8    | 8724    | 966   | 925   | 2.19  | 2.10  |
|                      | 1      | 8554    | 992   | 980   | 2.25  | 2.22  |
|                      | 1.2    | 8298    | 1025  | 1027  | 2.33  | 2.33  |
|                      | 1.4    | 8015    | 1054  | 1082  | 2.39  | 2.45  |
|                      | 1.6    | 7718    | 1094  | 1128  | 2.48  | 2.56  |
| T4                   | 1.8    | 7441    | 1133  | 1158  | 2.57  | 2.63  |
|                      | 2      | 7210    | 1171  | 1189  | 2.66  | 2.70  |
|                      | 2.2    | 6884    | 1209  | 1218  | 2.74  | 2.76  |
|                      | 0.2    | 9881    | 909   | 854   | 2.24  | 2.11  |
|                      | 0.4    | 9602    | 941   | 890   | 2.32  | 2.20  |
|                      | 0.6    | 9353    | 976   | 915   | 2.41  | 2.26  |
|                      | 0.8    | 9179    | 1008  | 959   | 2.49  | 2.37  |
|                      | 1      | 9025    | 1032  | 1009  | 2.55  | 2.49  |
|                      | 1.2    | 8787    | 1063  | 1055  | 2.62  | 2.60  |
|                      | 1.4    | 8519    | 1090  | 1107  | 2.69  | 2.73  |
| T4                   | 1.6    | 8248    | 1127  | 1151  | 2.78  | 2.84  |
|                      | 1.8    | 7989    | 1163  | 1181  | 2.87  | 2.92  |
|                      | 2      | 7770    | 1199  | 1211  | 2.96  | 2.99  |
|                      | 2.2    | 7460    | 1237  | 1239  | 3.05  | 3.06  |

| DFC3003W HIGH STATIC |        |         |       |       |       |       |
|----------------------|--------|---------|-------|-------|-------|-------|
| SPEED TAP            | STATIC | AIRFLOW | RPM 1 | RPM 2 | BHP 1 | BHP 2 |
| T5                   | 0.2    | 10259   | 962   | 901   | 2.57  | 2.41  |
|                      | 0.4    | 9987    | 992   | 934   | 2.65  | 2.49  |
|                      | 0.6    | 9759    | 1024  | 956   | 2.73  | 2.55  |
|                      | 0.8    | 9594    | 1054  | 996   | 2.81  | 2.66  |
|                      | 1      | 9446    | 1075  | 1041  | 2.87  | 2.78  |
|                      | 1.2    | 9224    | 1105  | 1084  | 2.95  | 2.89  |
|                      | 1.4    | 8972    | 1131  | 1132  | 3.02  | 3.02  |
|                      | 1.6    | 8724    | 1163  | 1175  | 3.11  | 3.14  |
|                      | 1.8    | 8484    | 1196  | 1203  | 3.19  | 3.21  |
|                      | 2      | 8276    | 1231  | 1233  | 3.29  | 3.29  |
| T6                   | 2.2    | 7988    | 1267  | 1259  | 3.38  | 3.36  |
|                      | 0.2    | 10268   | 963   | 902   | 2.58  | 2.41  |
|                      | 0.4    | 9996    | 993   | 935   | 2.66  | 2.50  |
|                      | 0.6    | 9769    | 1025  | 957   | 2.74  | 2.56  |
|                      | 0.8    | 9604    | 1055  | 997   | 2.82  | 2.67  |
|                      | 1      | 9456    | 1077  | 1042  | 2.88  | 2.79  |
|                      | 1.2    | 9235    | 1106  | 1084  | 2.96  | 2.90  |
|                      | 1.4    | 8983    | 1132  | 1133  | 3.03  | 3.03  |
|                      | 1.6    | 8736    | 1164  | 1175  | 3.11  | 3.14  |
|                      | 1.8    | 8496    | 1197  | 1204  | 3.20  | 3.22  |
| T7                   | 2      | 8288    | 1232  | 1233  | 3.29  | 3.30  |
|                      | 2.2    | 8001    | 1267  | 1259  | 3.39  | 3.37  |
|                      | 0.2    | 10626   | 1022  | 955   | 2.95  | 2.75  |
|                      | 0.4    | 10361   | 1049  | 984   | 3.03  | 2.84  |
|                      | 0.6    | 10156   | 1080  | 1004  | 3.11  | 2.90  |
|                      | 0.8    | 9995    | 1107  | 1040  | 3.19  | 3.00  |
|                      | 1      | 9842    | 1127  | 1079  | 3.25  | 3.11  |
|                      | 1.2    | 9638    | 1155  | 1117  | 3.33  | 3.22  |
|                      | 1.4    | 9402    | 1179  | 1160  | 3.40  | 3.35  |
|                      | 1.6    | 9176    | 1207  | 1199  | 3.48  | 3.46  |
| T8                   | 1.8    | 8958    | 1236  | 1227  | 3.57  | 3.54  |
|                      | 2      | 8760    | 1269  | 1255  | 3.66  | 3.62  |
|                      | 2.2    | 8502    | 1302  | 1280  | 3.76  | 3.69  |
|                      | 0.2    | 10979   | 1092  | 1017  | 3.41  | 3.17  |
|                      | 0.4    | 10723   | 1116  | 1042  | 3.48  | 3.25  |
|                      | 0.6    | 10544   | 1144  | 1062  | 3.57  | 3.31  |
|                      | 0.8    | 10382   | 1168  | 1093  | 3.65  | 3.41  |
|                      | 1      | 10209   | 1190  | 1123  | 3.71  | 3.51  |
|                      | 1.2    | 10023   | 1216  | 1155  | 3.79  | 3.60  |
|                      | 1.4    | 9804    | 1237  | 1191  | 3.86  | 3.72  |
|                      | 1.6    | 9598    | 1261  | 1225  | 3.93  | 3.82  |
|                      | 1.8    | 9406    | 1285  | 1252  | 4.01  | 3.91  |
|                      | 2      | 9218    | 1314  | 1278  | 4.10  | 3.99  |
|                      | 2.2    | 9000    | 1344  | 1301  | 4.19  | 4.06  |

| DFC3003W HIGH STATIC |        |         |       |       |       |       |
|----------------------|--------|---------|-------|-------|-------|-------|
| SPEED TAP            | STATIC | AIRFLOW | RPM 1 | RPM 2 | BHP 1 | BHP 2 |
| T9                   | 0.2    | 11348   | 1185  | 1101  | 4.05  | 3.76  |
|                      | 0.4    | 11101   | 1206  | 1120  | 4.11  | 3.82  |
|                      | 0.6    | 10956   | 1230  | 1142  | 4.20  | 3.90  |
|                      | 0.8    | 10785   | 1250  | 1165  | 4.27  | 3.97  |
|                      | 1      | 10567   | 1275  | 1183  | 4.35  | 4.04  |
|                      | 1.2    | 10402   | 1298  | 1205  | 4.43  | 4.11  |
|                      | 1.4    | 10203   | 1317  | 1230  | 4.49  | 4.20  |
|                      | 1.6    | 10015   | 1335  | 1257  | 4.56  | 4.29  |
|                      | 1.8    | 9858    | 1353  | 1281  | 4.62  | 4.37  |
|                      | 2      | 9682    | 1376  | 1305  | 4.70  | 4.45  |
|                      | 2.2    | 9524    | 1400  | 1326  | 4.78  | 4.52  |
| T10                  | 0.2    | 11679   | 1301  | 1205  | 4.88  | 4.52  |
|                      | 0.4    | 11444   | 1317  | 1219  | 4.94  | 4.57  |
|                      | 0.6    | 11337   | 1338  | 1246  | 5.02  | 4.67  |
|                      | 0.8    | 11145   | 1353  | 1257  | 5.07  | 4.71  |
|                      | 1      | 10847   | 1386  | 1260  | 5.20  | 4.72  |
|                      | 1.2    | 10703   | 1405  | 1267  | 5.27  | 4.75  |
|                      | 1.4    | 10526   | 1421  | 1277  | 5.33  | 4.79  |
|                      | 1.6    | 10353   | 1432  | 1291  | 5.37  | 4.84  |
|                      | 1.8    | 10238   | 1441  | 1313  | 5.40  | 4.93  |
|                      | 2      | 10074   | 1457  | 1333  | 5.47  | 5.00  |
|                      | 2.2    | 10002   | 1473  | 1353  | 5.52  | 5.07  |

| DFC1803D STANDARD STATIC |        |         |       |       |       |       |
|--------------------------|--------|---------|-------|-------|-------|-------|
| SPEED TAP                | STATIC | AIRFLOW | RPM 1 | RPM 2 | BHP 1 | BHP 2 |
| T1                       | 0.2    | 3198    | 422   | 434   | 0.19  | 0.20  |
|                          | 0.4    | 2752    | 503   | 498   | 0.23  | 0.22  |
|                          | 0.6    | 2055    | 609   | 564   | 0.27  | 0.25  |
|                          | 0.8    | 1372    | 674   | 648   | 0.30  | 0.29  |
|                          | 1      | -       | -     | -     | -     | -     |
|                          | 1.2    | -       | -     | -     | -     | -     |
| T2                       | 0.2    | 4368    | 496   | 509   | 0.35  | 0.35  |
|                          | 0.4    | 3945    | 567   | 568   | 0.39  | 0.40  |
|                          | 0.6    | 3374    | 654   | 626   | 0.46  | 0.44  |
|                          | 0.8    | 3899    | 714   | 696   | 0.50  | 0.48  |
|                          | 1      | 2318    | 761   | 751   | 0.53  | 0.52  |
|                          | 1.2    | 1766    | 791   | 826   | 0.55  | 0.57  |
| T3                       | 0.2    | 5124    | 544   | 558   | 0.50  | 0.51  |
|                          | 0.4    | 4716    | 609   | 613   | 0.56  | 0.56  |
|                          | 0.6    | 4222    | 685   | 667   | 0.63  | 0.61  |
|                          | 0.8    | 3643    | 741   | 728   | 0.68  | 0.67  |
|                          | 1      | 3264    | 788   | 778   | 0.72  | 0.71  |
|                          | 1.2    | 2756    | 827   | 845   | 0.76  | 0.77  |
| T4                       | 0.2    | 7370    | 685   | 705   | 1.33  | 1.37  |
|                          | 0.4    | 7008    | 733   | 750   | 1.43  | 1.46  |
|                          | 0.6    | 6703    | 779   | 791   | 1.52  | 1.54  |
|                          | 0.8    | 6574    | 826   | 829   | 1.61  | 1.61  |
|                          | 1      | 6021    | 873   | 868   | 1.70  | 1.69  |
|                          | 1.2    | 5643    | 928   | 911   | 1.80  | 1.77  |
| T5                       | 0.2    | 7626    | 702   | 722   | 1.27  | 1.31  |
|                          | 0.4    | 7265    | 749   | 766   | 1.36  | 1.39  |
|                          | 0.6    | 6970    | 793   | 806   | 1.44  | 1.46  |
|                          | 0.8    | 4105    | 837   | 843   | 1.51  | 1.53  |
|                          | 1      | 6316    | 882   | 881   | 1.60  | 1.59  |
|                          | 1.2    | 5955    | 936   | 922   | 1.69  | 1.67  |
| T6                       | 0.2    | 7227    | 677   | 695   | 1.11  | 1.14  |
|                          | 0.4    | 6858    | 726   | 741   | 1.19  | 1.22  |
|                          | 0.6    | 6540    | 774   | 783   | 1.27  | 1.29  |
|                          | 0.8    | 6188    | 820   | 823   | 1.35  | 1.35  |
|                          | 1      | -       | -     | -     | -     | -     |
|                          | 1.2    | -       | -     | -     | -     | -     |
| T7                       | 0.2    | 7431    | 690   | 709   | 1.19  | 1.22  |
|                          | 0.4    | 7065    | 738   | 754   | 1.27  | 1.30  |
|                          | 0.6    | 6760    | 784   | 795   | 1.35  | 1.37  |
|                          | 0.8    | 6423    | 829   | 833   | 1.43  | 1.44  |
|                          | 1      | 6084    | 875   | 872   | 1.51  | 1.51  |
|                          | 1.2    | -       | -     | -     | -     | -     |
| T8                       | 0.2    | 7669    | 705   | 724   | 1.29  | 1.32  |
|                          | 0.4    | 7308    | 751   | 769   | 1.37  | 1.41  |
|                          | 0.6    | 7016    | 795   | 809   | 1.45  | 1.48  |
|                          | 0.8    | 6696    | 839   | 846   | 1.53  | 1.55  |
|                          | 1      | 6366    | 884   | 883   | 1.62  | 1.61  |
|                          | 1.2    | 6007    | 938   | 923   | 1.71  | 1.69  |
| T9                       | 0.2    | 7783    | 712   | 732   | 1.34  | 1.38  |
|                          | 0.4    | 7424    | 758   | 776   | 1.42  | 1.46  |
|                          | 0.6    | 7138    | 800   | 815   | 1.50  | 1.53  |
|                          | 0.8    | 6826    | 843   | 851   | 1.59  | 1.60  |
|                          | 1      | 6501    | 888   | 888   | 1.67  | 1.67  |
|                          | 1.2    | 6149    | 942   | 928   | 1.77  | 1.74  |
| T10                      | 0.2    | 7885    | 719   | 739   | 1.38  | 1.42  |
|                          | 0.4    | 7527    | 764   | 782   | 1.47  | 1.51  |
|                          | 0.6    | 7247    | 805   | 821   | 1.55  | 1.58  |
|                          | 0.8    | 6941    | 848   | 857   | 1.63  | 1.65  |
|                          | 1      | 6620    | 892   | 893   | 1.72  | 1.72  |
|                          | 1.2    | 6275    | 946   | 932   | 1.82  | 1.79  |

| DFC2403D STANDARD STATIC |        |         |       |       |       |       |
|--------------------------|--------|---------|-------|-------|-------|-------|
| SPEED TAP                | STATIC | AIRFLOW | RPM 1 | RPM 2 | BHP 1 | BHP 2 |
| T1                       | 0.2    | 4426    | 504   | 521   | 0.29  | 0.30  |
|                          | 0.4    | 4019    | 574   | 579   | 0.33  | 0.33  |
|                          | 0.6    | 3466    | 660   | 636   | 0.38  | 0.37  |
|                          | 0.8    | 2911    | 717   | 701   | 0.41  | 0.40  |
|                          | 1      | 2424    | 772   | 756   | 0.44  | 0.43  |
|                          | 1.2    | 1881    | 809   | 825   | 0.47  | 0.47  |
| T2                       | 0.2    | 5830    | 591   | 608   | 0.62  | 0.64  |
|                          | 0.4    | 5453    | 649   | 659   | 0.68  | 0.69  |
|                          | 0.6    | 5056    | 711   | 707   | 0.75  | 0.74  |
|                          | 0.8    | 4597    | 771   | 757   | 0.81  | 0.80  |
|                          | 1      | 4141    | 832   | 803   | 0.88  | 0.85  |
|                          | 1.2    | 3702    | 867   | 861   | 0.91  | 0.91  |
| T3                       | 0.2    | 6929    | 659   | 677   | 0.98  | 1.00  |
|                          | 0.4    | 6571    | 709   | 724   | 1.05  | 1.07  |
|                          | 0.6    | 6269    | 756   | 765   | 1.12  | 1.13  |
|                          | 0.8    | 5883    | 815   | 806   | 1.21  | 1.19  |
|                          | 1      | 5461    | 876   | 845   | 1.30  | 1.25  |
|                          | 1.2    | 5096    | 910   | 895   | 1.35  | 1.32  |
| T4                       | 0.2    | 9133    | 798   | 821   | 2.08  | 2.14  |
|                          | 0.4    | 8793    | 837   | 860   | 2.19  | 2.25  |
|                          | 0.6    | 8538    | 871   | 895   | 2.28  | 2.34  |
|                          | 0.8    | 8286    | 912   | 929   | 2.38  | 2.43  |
|                          | 1      | 7991    | 947   | 960   | 2.48  | 2.51  |
|                          | 1.2    | 7739    | 984   | 992   | 2.57  | 2.59  |
| T5                       | 0.2    | 9371    | 813   | 837   | 2.26  | 2.33  |
|                          | 0.4    | 9030    | 852   | 875   | 2.37  | 2.43  |
|                          | 0.6    | 8756    | 888   | 912   | 2.47  | 2.53  |
|                          | 0.8    | 8516    | 924   | 946   | 2.57  | 2.63  |
|                          | 1      | 8245    | 953   | 977   | 2.65  | 2.71  |
|                          | 1.2    | 8000    | 990   | 1007  | 2.75  | 2.80  |
| T6                       | 0.2    | 7986    | 725   | 745   | 1.42  | 1.46  |
|                          | 0.4    | 7641    | 769   | 787   | 1.51  | 1.54  |
|                          | 0.6    | 7394    | 805   | 824   | 1.58  | 1.61  |
|                          | 0.8    | 7076    | 860   | 859   | 1.68  | 1.68  |
|                          | 1      | -       | -     | -     | -     | -     |
|                          | 1.2    | -       | -     | -     | -     | -     |
| T7                       | 0.2    | 8329    | 746   | 767   | 1.59  | 1.64  |
|                          | 0.4    | 7987    | 789   | 808   | 1.68  | 1.73  |
|                          | 0.6    | 7748    | 823   | 844   | 1.76  | 1.80  |
|                          | 0.8    | 7450    | 875   | 878   | 1.87  | 1.87  |
|                          | 1      | 7096    | 925   | 911   | 1.98  | 1.95  |
|                          | 1.2    | -       | -     | -     | -     | -     |
| T8                       | 0.2    | 8663    | 768   | 789   | 1.78  | 1.83  |
|                          | 0.4    | 8323    | 808   | 829   | 1.88  | 1.92  |
|                          | 0.6    | 8083    | 842   | 865   | 1.95  | 2.01  |
|                          | 0.8    | 7806    | 890   | 898   | 2.06  | 2.08  |
|                          | 1      | 7473    | 935   | 930   | 2.17  | 2.16  |
|                          | 1.2    | 7204    | 970   | 966   | 2.25  | 2.24  |
| T9                       | 0.2    | 9133    | 798   | 821   | 2.08  | 2.14  |
|                          | 0.4    | 8793    | 837   | 860   | 2.19  | 2.25  |
|                          | 0.6    | 8538    | 871   | 895   | 2.28  | 2.34  |
|                          | 0.8    | 8286    | 912   | 929   | 2.38  | 2.43  |
|                          | 1      | 7991    | 947   | 960   | 2.48  | 2.51  |
|                          | 1.2    | 7739    | 984   | 992   | 2.57  | 2.59  |
| T10                      | 0.2    | 9371    | 813   | 837   | 2.26  | 2.33  |
|                          | 0.4    | 9030    | 852   | 875   | 2.37  | 2.43  |
|                          | 0.6    | 8756    | 888   | 912   | 2.47  | 2.53  |
|                          | 0.8    | 8516    | 924   | 946   | 2.57  | 2.63  |
|                          | 1      | 8245    | 953   | 977   | 2.65  | 2.71  |
|                          | 1.2    | 8000    | 990   | 1007  | 2.75  | 2.80  |

| DFC3003D STANDARD STATIC |        |         |       |       |       |       |
|--------------------------|--------|---------|-------|-------|-------|-------|
| SPEED TAP                | STATIC | AIRFLOW | RPM 1 | RPM 2 | BHP 1 | BHP 2 |
| T1                       | 0.2    | 5835    | 605   | 594   | 0.57  | 0.56  |
|                          | 0.4    | 5496    | 659   | 654   | 0.63  | 0.62  |
|                          | 0.6    | 5095    | 706   | 736   | 0.67  | 0.70  |
|                          | 0.8    | 4723    | 757   | 785   | 0.72  | 0.75  |
|                          | 1      | 4182    | 836   | 848   | 0.79  | 0.81  |
| T2                       | 1.2    | 3784    | 874   | 884   | 0.83  | 0.84  |
|                          | 0.2    | 7123    | 669   | 647   | 0.91  | 0.88  |
|                          | 0.4    | 6801    | 717   | 701   | 0.97  | 0.95  |
|                          | 0.6    | 6439    | 761   | 761   | 1.03  | 1.03  |
|                          | 0.8    | 6144    | 808   | 813   | 1.10  | 1.10  |
| T3                       | 1      | 5766    | 864   | 877   | 1.17  | 1.19  |
|                          | 1.2    | 5416    | 902   | 921   | 1.22  | 1.25  |
|                          | 0.2    | 8988    | 809   | 767   | 1.66  | 1.58  |
|                          | 0.4    | 8693    | 847   | 810   | 1.74  | 1.67  |
|                          | 0.6    | 8401    | 885   | 843   | 1.82  | 1.73  |
| T4                       | 0.8    | 8197    | 923   | 892   | 1.90  | 1.83  |
|                          | 1      | 7998    | 954   | 951   | 1.96  | 1.96  |
|                          | 1.2    | 7722    | 988   | 1000  | 2.03  | 2.06  |
|                          | 0.2    | 10778   | 1051  | 980   | 3.13  | 2.92  |
|                          | 0.4    | 10516   | 1077  | 1007  | 3.21  | 3.00  |
| T5                       | 0.6    | 10323   | 1106  | 1027  | 3.30  | 3.06  |
|                          | 0.8    | 10162   | 1132  | 1061  | 3.37  | 3.16  |
|                          | 1      | 10002   | 1152  | 1097  | 3.44  | 3.27  |
|                          | 1.2    | 9806    | 1179  | 1132  | 3.52  | 3.38  |
|                          | 0.2    | 10958   | 1088  | 1013  | 3.38  | 3.15  |
| T6                       | 0.4    | 10701   | 1112  | 1038  | 3.45  | 3.22  |
|                          | 0.6    | 10521   | 1140  | 1058  | 3.54  | 3.29  |
|                          | 0.8    | 10359   | 1164  | 1089  | 3.61  | 3.38  |
|                          | 1      | 10187   | 1186  | 1120  | 3.68  | 3.48  |
|                          | 1.2    | 10000   | 1211  | 1152  | 3.76  | 3.58  |
| T7                       | 0.2    | 9218    | 832   | 787   | 1.79  | 1.70  |
|                          | 0.4    | 8927    | 869   | 828   | 1.87  | 1.79  |
|                          | 0.6    | -       | -     | -     | -     | -     |
|                          | 0.8    | -       | -     | -     | -     | -     |
|                          | 1      | -       | -     | -     | -     | -     |
| T8                       | 1.2    | -       | -     | -     | -     | -     |
|                          | 0.2    | 9642    | 879   | 828   | 2.07  | 1.95  |
|                          | 0.4    | 9358    | 913   | 866   | 2.15  | 2.04  |
|                          | 0.6    | 9096    | 949   | 893   | 2.23  | 2.10  |
|                          | 0.8    | 8916    | 983   | 938   | 2.31  | 2.21  |
| T9                       | 1      | 8754    | 1008  | 991   | 2.37  | 2.33  |
|                          | 1.2    | -       | -     | -     | -     | -     |
|                          | 0.2    | 9934    | 1083  | 971   | 2.68  | 2.40  |
|                          | 0.4    | 9735    | 1110  | 999   | 2.75  | 2.47  |
|                          | 0.6    | 9559    | 1138  | 1027  | 2.82  | 2.54  |
| T10                      | 0.8    | 9379    | 1162  | 1056  | 2.88  | 2.61  |
|                          | 1      | 9201    | 1187  | 1086  | 2.94  | 2.69  |
|                          | 1.2    | 9006    | 1212  | 1120  | 3.00  | 2.77  |
|                          | 0.2    | 10398   | 1123  | 1008  | 3.04  | 2.73  |
|                          | 0.4    | 10203   | 1149  | 1034  | 3.11  | 2.80  |
| T11                      | 0.6    | 10034   | 1176  | 1060  | 3.18  | 2.87  |
|                          | 0.8    | 9863    | 1199  | 1087  | 3.24  | 2.94  |
|                          | 1      | 9698    | 1222  | 1116  | 3.30  | 3.02  |
|                          | 1.2    | 9516    | 1245  | 1147  | 3.37  | 3.10  |
|                          | 0.2    | 10958   | 1088  | 1013  | 3.38  | 3.15  |
| T12                      | 0.4    | 10701   | 1112  | 1038  | 3.45  | 3.22  |
|                          | 0.6    | 10521   | 1140  | 1058  | 3.54  | 3.29  |
|                          | 0.8    | 10359   | 1164  | 1089  | 3.61  | 3.38  |
|                          | 1      | 10187   | 1186  | 1120  | 3.68  | 3.48  |
|                          | 1.2    | 10000   | 1211  | 1152  | 3.76  | 3.58  |

| MODELS: DFC1803D, DFC1804D, DFC1807D • STANDARD STATIC TO 3.5HP (0.2 ~1.2 ESP) |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|--------------------------------------------------------------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| CFM                                                                            | 0.2  |      |      |      |      | 0.4  |      |      |      |      | 0.6  |      |      |      |      |
|                                                                                | RPM1 | RPM2 | DDC% | BHP1 | BHP2 | RPM1 | RPM2 | DDC% | BHP1 | BHP2 | RPM1 | RPM2 | DDC% | BHP1 | BHP2 |
| 3600                                                                           | 449  | 462  | 27   | 0.36 | 0.38 | 554  | 551  | 29   | 0.41 | 0.41 | 667  | 640  | 31   | 0.52 | 0.50 |
| 3900                                                                           | 468  | 480  | 28   | 0.36 | 0.37 | 568  | 568  | 30   | 0.43 | 0.43 | 674  | 652  | 32   | 0.54 | 0.52 |
| 4200                                                                           | 486  | 499  | 29   | 0.37 | 0.38 | 583  | 584  | 31   | 0.45 | 0.46 | 682  | 665  | 33   | 0.58 | 0.56 |
| 4500                                                                           | 505  | 518  | 30   | 0.39 | 0.40 | 598  | 601  | 32   | 0.49 | 0.50 | 691  | 678  | 34   | 0.63 | 0.61 |
| 4800                                                                           | 523  | 537  | 32   | 0.42 | 0.44 | 613  | 618  | 34   | 0.54 | 0.55 | 700  | 692  | 36   | 0.69 | 0.68 |
| 5100                                                                           | 542  | 556  | 33   | 0.47 | 0.48 | 628  | 635  | 35   | 0.60 | 0.61 | 710  | 706  | 38   | 0.76 | 0.75 |
| 5400                                                                           | 561  | 575  | 35   | 0.52 | 0.54 | 644  | 652  | 37   | 0.67 | 0.68 | 721  | 721  | 40   | 0.84 | 0.84 |
| 5700                                                                           | 579  | 595  | 37   | 0.59 | 0.60 | 660  | 670  | 39   | 0.76 | 0.77 | 733  | 736  | 42   | 0.93 | 0.94 |
| 6000                                                                           | 598  | 614  | 39   | 0.67 | 0.68 | 676  | 687  | 42   | 0.85 | 0.86 | 745  | 751  | 44   | 1.04 | 1.05 |
| 6300                                                                           | 617  | 634  | 41   | 0.76 | 0.77 | 693  | 705  | 44   | 0.96 | 0.97 | 758  | 767  | 47   | 1.15 | 1.17 |
| 6600                                                                           | 636  | 653  | 43   | 0.86 | 0.88 | 709  | 724  | 47   | 1.07 | 1.09 | 772  | 784  | 50   | 1.28 | 1.30 |
| CFM                                                                            | 0.8  |      |      |      |      | 1    |      |      |      |      | 1.2  |      |      |      |      |
|                                                                                | RPM1 | RPM2 | DDC% | BHP1 | BHP2 | RPM1 | RPM2 | DDC% | BHP1 | BHP2 | RPM1 | RPM2 | DDC% | BHP1 | BHP2 |
| 3600                                                                           | 758  | 745  | 36   | 0.76 | 0.75 | 798  | 784  | 34   | 0.74 | 0.71 | 861  | 855  | 37   | 0.90 | 0.87 |
| 3900                                                                           | 756  | 742  | 36   | 0.74 | 0.73 | 808  | 791  | 36   | 0.80 | 0.77 | 872  | 861  | 38   | 0.98 | 0.95 |
| 4200                                                                           | 756  | 741  | 36   | 0.74 | 0.72 | 817  | 800  | 37   | 0.87 | 0.84 | 883  | 868  | 40   | 1.06 | 1.03 |
| 4500                                                                           | 758  | 742  | 36   | 0.76 | 0.74 | 827  | 809  | 39   | 0.94 | 0.91 | 893  | 876  | 42   | 1.15 | 1.12 |
| 4800                                                                           | 761  | 745  | 37   | 0.79 | 0.77 | 836  | 819  | 41   | 1.03 | 1.00 | 904  | 884  | 44   | 1.25 | 1.22 |
| 5100                                                                           | 765  | 750  | 38   | 0.84 | 0.82 | 846  | 829  | 43   | 1.13 | 1.10 | 913  | 892  | 46   | 1.36 | 1.33 |
| 5400                                                                           | 772  | 758  | 39   | 0.91 | 0.89 | 856  | 840  | 45   | 1.23 | 1.21 | 923  | 902  | 49   | 1.48 | 1.44 |
| 5700                                                                           | 779  | 767  | 41   | 0.99 | 0.98 | 866  | 852  | 48   | 1.35 | 1.33 | 932  | 912  | 51   | 1.60 | 1.57 |
| 6000                                                                           | 789  | 778  | 43   | 1.10 | 1.09 | 875  | 865  | 50   | 1.47 | 1.46 | 941  | 922  | 54   | 1.73 | 1.71 |
| 6300                                                                           | 800  | 792  | 46   | 1.22 | 1.22 | 885  | 878  | 53   | 1.61 | 1.61 | 949  | 934  | 57   | 1.87 | 1.86 |
| 6600                                                                           | 812  | 807  | 48   | 1.36 | 1.36 | 895  | 892  | 56   | 1.75 | 1.76 | 957  | 946  | 60   | 2.02 | 2.01 |


| MODELS: DFC2403D, DFC2404D, DFC2407D • STANDARD STATIC TO 3.5HP (0.2 ~1.2 ESP) |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|--------------------------------------------------------------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| CFM                                                                            | 0.2  |      |      |      |      | 0.4  |      |      |      |      | 0.6  |      |      |      |      |
|                                                                                | RPM1 | RPM2 | DDC% | BHP1 | BHP2 | RPM1 | RPM2 | DDC% | BHP1 | BHP2 | RPM1 | RPM2 | DDC% | BHP1 | BHP2 |
| 4800                                                                           | 525  | 539  | 31   | 0.42 | 1.18 | 615  | 621  | 33   | 0.53 | 1.07 | 699  | 693  | 35   | 0.66 | 1.05 |
| 5200                                                                           | 550  | 566  | 33   | 0.48 | 1.17 | 635  | 644  | 35   | 0.61 | 1.07 | 712  | 712  | 37   | 0.75 | 1.05 |
| 5600                                                                           | 576  | 593  | 35   | 0.56 | 1.16 | 656  | 668  | 38   | 0.71 | 1.06 | 726  | 731  | 40   | 0.86 | 1.04 |
| 6000                                                                           | 601  | 620  | 38   | 0.65 | 1.15 | 678  | 691  | 40   | 0.82 | 1.05 | 742  | 752  | 43   | 1.00 | 1.03 |
| 6400                                                                           | 627  | 646  | 41   | 0.77 | 1.14 | 700  | 715  | 44   | 0.96 | 1.04 | 759  | 773  | 46   | 1.15 | 1.02 |
| 6800                                                                           | 652  | 672  | 44   | 0.91 | 1.13 | 722  | 739  | 47   | 1.12 | 1.03 | 778  | 794  | 50   | 1.32 | 1.01 |
| 7200                                                                           | 677  | 698  | 48   | 1.06 | 1.12 | 744  | 763  | 51   | 1.30 | 1.03 | 798  | 817  | 54   | 1.52 | 1.01 |
| 7600                                                                           | 702  | 724  | 52   | 1.24 | 1.11 | 767  | 788  | 55   | 1.49 | 1.02 | 819  | 840  | 59   | 1.73 | 1.00 |
| 8000                                                                           | 727  | 750  | 56   | 1.43 | 1.11 | 791  | 812  | 60   | 1.71 | 1.01 | 842  | 865  | 64   | 1.97 | 0.99 |
| 8400                                                                           | 752  | 775  | 61   | 1.65 | 1.10 | 814  | 836  | 65   | 1.95 | 1.00 | 867  | 890  | 69   | 2.22 | 0.99 |
| 8800                                                                           | 777  | 800  | 66   | 1.88 | 1.09 | 838  | 861  | 70   | 2.21 | 0.99 | 892  | 915  | 74   | 2.50 | 0.98 |
| CFM                                                                            | 0.8  |      |      |      |      | 1    |      |      |      |      | 1.2  |      |      |      |      |
|                                                                                | RPM1 | RPM2 | DDC% | BHP1 | BHP2 | RPM1 | RPM2 | DDC% | BHP1 | BHP2 | RPM1 | RPM2 | DDC% | BHP1 | BHP2 |
| 4800                                                                           | 777  | 761  | 37   | 0.84 | 0.92 | 860  | 820  | 40   | 1.05 | 0.75 | 908  | 884  | 43   | 1.22 | 0.71 |
| 5200                                                                           | 791  | 776  | 40   | 0.95 | 0.91 | 874  | 834  | 43   | 1.18 | 0.75 | 920  | 896  | 46   | 1.36 | 0.71 |
| 5600                                                                           | 806  | 792  | 43   | 1.08 | 0.91 | 888  | 849  | 46   | 1.32 | 0.74 | 932  | 908  | 49   | 1.51 | 0.70 |
| 6000                                                                           | 821  | 809  | 46   | 1.23 | 0.90 | 900  | 866  | 49   | 1.48 | 0.74 | 944  | 922  | 52   | 1.68 | 0.70 |
| 6400                                                                           | 836  | 828  | 50   | 1.39 | 0.89 | 911  | 883  | 53   | 1.65 | 0.74 | 954  | 937  | 56   | 1.87 | 0.70 |
| 6800                                                                           | 852  | 848  | 53   | 1.57 | 0.89 | 922  | 902  | 57   | 1.84 | 0.73 | 964  | 953  | 60   | 2.07 | 0.70 |
| 7200                                                                           | 868  | 869  | 58   | 1.78 | 0.88 | 931  | 921  | 61   | 2.04 | 0.73 | 973  | 971  | 64   | 2.28 | 0.69 |
| 7600                                                                           | 885  | 892  | 62   | 2.00 | 0.88 | 939  | 942  | 66   | 2.26 | 0.72 | 981  | 989  | 69   | 2.50 | 0.69 |
| 8000                                                                           | 902  | 915  | 67   | 2.23 | 0.87 | 947  | 964  | 71   | 2.49 | 0.72 | 989  | 1009 | 74   | 2.74 | 0.69 |
| 8400                                                                           | 919  | 940  | 72   | 2.49 | 0.87 |      |      |      |      |      |      |      |      |      |      |
| 8800                                                                           |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |

| MODELS: DFC3003D, DFC3004D, DFC3007D • STANDARD STATIC TO 5HP (0.2 ~1.2 ESP) |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|------------------------------------------------------------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| CFM                                                                          | 0.2  |      |      |      |      | 0.4  |      |      |      |      | 0.6  |      |      |      |      |
|                                                                              | RPM1 | RPM2 | DDC% | BHP1 | BHP2 | RPM1 | RPM2 | DDC% | BHP1 | BHP2 | RPM1 | RPM2 | DDC% | BHP1 | BHP2 |
| 7000                                                                         | 648  | 629  | 25   | 0.76 | 0.75 | 715  | 699  | 28   | 0.93 | 0.91 | 781  | 767  | 31   | 1.13 | 1.11 |
| 7500                                                                         | 680  | 656  | 29   | 0.92 | 0.89 | 748  | 726  | 33   | 1.12 | 1.09 | 816  | 792  | 36   | 1.35 | 1.32 |
| 8000                                                                         | 719  | 689  | 35   | 1.13 | 1.09 | 788  | 760  | 38   | 1.37 | 1.32 | 857  | 823  | 42   | 1.62 | 1.56 |
| 8500                                                                         | 765  | 730  | 40   | 1.40 | 1.33 | 835  | 800  | 44   | 1.66 | 1.59 | 904  | 859  | 48   | 1.94 | 1.84 |
| 9000                                                                         | 819  | 777  | 47   | 1.72 | 1.63 | 889  | 847  | 51   | 2.01 | 1.91 | 957  | 902  | 54   | 2.29 | 2.17 |
| 9500                                                                         | 880  | 830  | 54   | 2.10 | 1.97 | 950  | 899  | 58   | 2.41 | 2.27 | 1015 | 952  | 61   | 2.70 | 2.53 |
| 10000                                                                        | 949  | 891  | 61   | 2.53 | 2.37 | 1018 | 958  | 65   | 2.86 | 2.68 | 1079 | 1007 | 68   | 3.14 | 2.93 |
| 10500                                                                        | 1025 | 958  | 69   | 3.01 | 2.81 | 1093 | 1023 | 73   | 3.36 | 3.14 | 1149 | 1069 | 76   | 3.63 | 3.38 |
| 11000                                                                        | 1109 | 1032 | 77   | 3.55 | 3.30 | 1175 | 1094 | 82   | 3.91 | 3.64 | 1225 | 1137 | 84   | 4.16 | 3.86 |
| CFM                                                                          | 0.8  |      |      |      |      | 1    |      |      |      |      | 1.2  |      |      |      |      |
|                                                                              | RPM1 | RPM2 | DDC% | BHP1 | BHP2 | RPM1 | RPM2 | DDC% | BHP1 | BHP2 | RPM1 | RPM2 | DDC% | BHP1 | BHP2 |
| 7000                                                                         | 840  | 831  | 34   | 1.30 | 1.29 | 894  | 908  | 36   | 1.48 | 1.50 | 947  | 972  | 39   | 1.69 | 1.73 |
| 7500                                                                         | 874  | 856  | 39   | 1.54 | 1.51 | 925  | 933  | 41   | 1.73 | 1.74 | 979  | 996  | 44   | 1.96 | 1.98 |
| 8000                                                                         | 914  | 886  | 44   | 1.82 | 1.77 | 963  | 961  | 47   | 2.03 | 2.01 | 1018 | 1024 | 50   | 2.27 | 2.26 |
| 8500                                                                         | 959  | 922  | 50   | 2.15 | 2.06 | 1007 | 993  | 53   | 2.37 | 2.31 | 1062 | 1053 | 56   | 2.62 | 2.57 |
| 9000                                                                         | 1010 | 963  | 57   | 2.52 | 2.39 | 1058 | 1029 | 59   | 2.75 | 2.65 | 1112 | 1086 | 62   | 3.01 | 2.91 |
| 9500                                                                         | 1067 | 1009 | 64   | 2.93 | 2.76 | 1115 | 1069 | 66   | 3.18 | 3.02 | 1168 | 1121 | 69   | 3.44 | 3.28 |
| 10000                                                                        | 1129 | 1061 | 71   | 3.38 | 3.17 | 1179 | 1113 | 74   | 3.65 | 3.43 | 1230 | 1159 | 77   | 3.91 | 3.68 |
| 10500                                                                        | 1197 | 1118 | 79   | 3.88 | 3.62 | 1250 | 1161 | 82   | 4.16 | 3.88 | 1298 | 1200 | 84   | 4.41 | 4.11 |
| 11000                                                                        | 1270 | 1181 | 87   | 4.42 | 4.11 | 1328 | 1213 | 90   | 4.71 | 4.36 |      |      |      |      |      |

| MODELS: DFC1803W, DFC1804W, DFC1807W • HIGH STATIC TO 5HP (0.8 ~2.2 ESP) |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|--------------------------------------------------------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| CFM                                                                      | 0.8  |      |      |      |      | 1    |      |      |      |      | 1.2  |      |      |      |      | 1.4  |      |      |      |      |
|                                                                          | RPM1 | RPM2 | DDC% | BHP1 | BHP2 | RPM1 | RPM2 | DDC% | BHP1 | BHP2 | RPM1 | RPM2 | DDC% | BHP1 | BHP2 | RPM1 | RPM2 | DDC% | BHP1 | BHP2 |
| 4200                                                                     | 689  | 688  | 17   | 1.72 | 0.41 | 761  | 770  | 20   | 1.89 | 0.54 | 836  | 838  | 22   | 1.77 | 0.60 | 994  | 948  | 27   | 2.26 | 0.81 |
| 4500                                                                     | 704  | 704  | 18   | 1.71 | 0.41 | 774  | 782  | 21   | 1.87 | 0.54 | 846  | 847  | 23   | 1.76 | 0.61 | 990  | 949  | 28   | 2.25 | 0.82 |
| 4800                                                                     | 720  | 719  | 19   | 1.70 | 0.41 | 787  | 793  | 22   | 1.86 | 0.55 | 857  | 857  | 24   | 1.74 | 0.63 | 987  | 951  | 29   | 2.23 | 0.84 |
| 5100                                                                     | 736  | 735  | 21   | 1.68 | 0.44 | 801  | 805  | 23   | 1.85 | 0.57 | 868  | 867  | 26   | 1.73 | 0.67 | 985  | 955  | 30   | 2.22 | 0.87 |
| 5400                                                                     | 752  | 751  | 22   | 1.67 | 0.47 | 814  | 818  | 25   | 1.83 | 0.61 | 879  | 878  | 27   | 1.72 | 0.72 | 985  | 959  | 31   | 2.21 | 0.92 |
| 5700                                                                     | 768  | 767  | 24   | 1.66 | 0.52 | 829  | 831  | 27   | 1.82 | 0.66 | 891  | 889  | 29   | 1.71 | 0.78 | 986  | 965  | 32   | 2.19 | 0.99 |
| 6000                                                                     | 785  | 783  | 26   | 1.65 | 0.58 | 843  | 844  | 28   | 1.81 | 0.72 | 903  | 901  | 31   | 1.70 | 0.86 | 989  | 971  | 34   | 2.18 | 1.07 |
| 6300                                                                     | 801  | 799  | 28   | 1.63 | 0.66 | 858  | 858  | 30   | 1.79 | 0.80 | 916  | 913  | 33   | 1.68 | 0.96 | 992  | 978  | 36   | 2.16 | 1.16 |
| 6600                                                                     | 818  | 816  | 30   | 1.62 | 0.75 | 873  | 872  | 32   | 1.78 | 0.90 | 929  | 926  | 35   | 1.67 | 1.06 | 998  | 986  | 38   | 2.15 | 1.27 |
| CFM                                                                      | 1.6  |      |      |      |      | 1.8  |      |      |      |      | 2    |      |      |      |      | 2.2  |      |      |      |      |
|                                                                          | RPM1 | RPM2 | DDC% | BHP1 | BHP2 | RPM1 | RPM2 | DDC% | BHP1 | BHP2 | RPM1 | RPM2 | DDC% | BHP1 | BHP2 | RPM1 | RPM2 | DDC% | BHP1 | BHP2 |
| 4200                                                                     | 1025 | 1009 | 29   | 1.82 | 0.90 | 1070 | 1049 | 30   | 1.36 | 0.99 | 1114 | 1095 | 32   | 1.10 | 1.13 | 1164 | 1140 | 34   | 0.77 | 1.29 |
| 4500                                                                     | 1024 | 1009 | 30   | 1.81 | 0.93 | 1073 | 1051 | 31   | 1.35 | 1.04 | 1119 | 1098 | 34   | 1.10 | 1.20 | 1170 | 1145 | 36   | 0.77 | 1.39 |
| 4800                                                                     | 1025 | 1010 | 31   | 1.79 | 0.97 | 1076 | 1054 | 33   | 1.34 | 1.11 | 1124 | 1101 | 35   | 1.09 | 1.28 | 1177 | 1150 | 38   | 0.77 | 1.49 |
| 5100                                                                     | 1027 | 1013 | 32   | 1.78 | 1.02 | 1080 | 1058 | 34   | 1.34 | 1.18 | 1129 | 1106 | 37   | 1.09 | 1.37 | 1183 | 1155 | 40   | 0.77 | 1.60 |
| 5400                                                                     | 1029 | 1016 | 33   | 1.77 | 1.09 | 1085 | 1062 | 36   | 1.33 | 1.27 | 1135 | 1111 | 38   | 1.09 | 1.47 | 1190 | 1161 | 41   | 0.77 | 1.72 |
| 5700                                                                     | 1033 | 1020 | 35   | 1.76 | 1.17 | 1090 | 1067 | 38   | 1.32 | 1.37 | 1141 | 1116 | 40   | 1.08 | 1.59 | 1196 | 1167 | 43   | 0.77 | 1.85 |
| 6000                                                                     | 1037 | 1025 | 37   | 1.75 | 1.26 | 1096 | 1073 | 40   | 1.32 | 1.49 | 1147 | 1122 | 42   | 1.08 | 1.71 | 1203 | 1173 | 45   | 0.77 | 1.98 |
| 6300                                                                     | 1043 | 1031 | 39   | 1.74 | 1.37 | 1102 | 1080 | 42   | 1.31 | 1.61 | 1153 | 1129 | 44   | 1.07 | 1.84 | 1209 | 1180 | 48   | 0.77 | 2.13 |
| 6600                                                                     | 1049 | 1038 | 41   | 1.73 | 1.50 | 1109 | 1088 | 44   | 1.30 | 1.75 | 1160 | 1136 | 47   | 1.07 | 1.99 | 1216 | 1187 | 50   | 0.76 | 2.29 |

| MODELS: DFC2403W, DFC2404W, DFC2407W • HIGH STATIC TO 5HP (0.8 ~2.2 ESP) |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|--------------------------------------------------------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| CFM                                                                      | 0.8  |      |      |      |      | 1    |      |      |      |      | 1.2  |      |      |      |      | 1.4  |      |      |      |      |
|                                                                          | RPM1 | RPM2 | DDC% | BHP1 | BHP2 | RPM1 | RPM2 | DDC% | BHP1 | BHP2 | RPM1 | RPM2 | DDC% | BHP1 | BHP2 | RPM1 | RPM2 | DDC% | BHP1 | BHP2 |
| 5600                                                                     | 775  | 789  | 22   | 0.86 | 0.88 | 842  | 861  | 24   | 0.99 | 1.04 | 889  | 918  | 27   | 1.14 | 1.21 | 938  | 985  | 30   | 1.31 | 1.41 |
| 6000                                                                     | 789  | 797  | 25   | 0.95 | 0.97 | 852  | 871  | 27   | 1.10 | 1.14 | 901  | 931  | 30   | 1.26 | 1.33 | 953  | 999  | 33   | 1.46 | 1.55 |
| 6400                                                                     | 807  | 808  | 28   | 1.07 | 1.08 | 866  | 884  | 31   | 1.23 | 1.27 | 916  | 946  | 33   | 1.42 | 1.48 | 970  | 1015 | 36   | 1.63 | 1.72 |
| 6800                                                                     | 828  | 822  | 32   | 1.22 | 1.21 | 883  | 900  | 34   | 1.39 | 1.42 | 936  | 963  | 37   | 1.59 | 1.64 | 991  | 1032 | 40   | 1.82 | 1.90 |
| 7200                                                                     | 853  | 840  | 36   | 1.39 | 1.37 | 906  | 918  | 38   | 1.57 | 1.59 | 959  | 981  | 41   | 1.79 | 1.83 | 1015 | 1050 | 44   | 2.04 | 2.10 |
| 7600                                                                     | 882  | 861  | 40   | 1.59 | 1.56 | 932  | 938  | 42   | 1.79 | 1.79 | 987  | 1002 | 45   | 2.02 | 2.03 | 1043 | 1069 | 49   | 2.28 | 2.31 |
| 8000                                                                     | 914  | 886  | 44   | 1.82 | 1.77 | 963  | 961  | 47   | 2.03 | 2.01 | 1018 | 1024 | 50   | 2.27 | 2.26 | 1074 | 1090 | 53   | 2.54 | 2.54 |
| 8400                                                                     | 950  | 914  | 49   | 2.08 | 2.00 | 998  | 986  | 52   | 2.30 | 2.25 | 1052 | 1047 | 55   | 2.55 | 2.50 | 1108 | 1111 | 58   | 2.82 | 2.79 |
| 8800                                                                     | 989  | 946  | 54   | 2.36 | 2.26 | 1037 | 1014 | 57   | 2.59 | 2.51 |      |      |      |      |      |      |      |      |      |      |
| CFM                                                                      | 1.6  |      |      |      |      | 1.8  |      |      |      |      | 2    |      |      |      |      | 2.2  |      |      |      |      |
|                                                                          | RPM1 | RPM2 | DDC% | BHP1 | BHP2 | RPM1 | RPM2 | DDC% | BHP1 | BHP2 | RPM1 | RPM2 | DDC% | BHP1 | BHP2 | RPM1 | RPM2 | DDC% | BHP1 | BHP2 |
| 5600                                                                     | 1008 | 1042 | 33   | 1.54 | 1.63 | 1066 | 1086 | 36   | 1.75 | 1.82 | 1116 | 1129 | 38   | 1.94 | 1.98 | 1165 | 1175 | 41   | 2.16 | 2.19 |
| 6000                                                                     | 1023 | 1058 | 36   | 1.71 | 1.79 | 1081 | 1101 | 39   | 1.93 | 1.98 | 1132 | 1143 | 41   | 2.12 | 2.16 | 1182 | 1189 | 45   | 2.35 | 2.38 |
| 6400                                                                     | 1040 | 1074 | 40   | 1.89 | 1.97 | 1099 | 1117 | 43   | 2.12 | 2.17 | 1149 | 1159 | 45   | 2.32 | 2.35 | 1199 | 1203 | 48   | 2.56 | 2.57 |
| 6800                                                                     | 1060 | 1091 | 44   | 2.09 | 2.16 | 1118 | 1134 | 47   | 2.33 | 2.36 | 1168 | 1175 | 49   | 2.54 | 2.55 | 1219 | 1217 | 52   | 2.78 | 2.78 |
| 7200                                                                     | 1083 | 1108 | 48   | 2.31 | 2.36 | 1139 | 1150 | 51   | 2.56 | 2.57 | 1189 | 1191 | 53   | 2.77 | 2.77 | 1239 | 1232 | 56   | 3.02 | 2.99 |
| 7600                                                                     | 1109 | 1127 | 52   | 2.56 | 2.58 | 1163 | 1168 | 55   | 2.80 | 2.80 | 1212 | 1208 | 58   | 3.02 | 3.00 | 1261 | 1247 | 61   | 3.28 | 3.22 |
| 8000                                                                     | 1137 | 1146 | 57   | 2.82 | 2.82 | 1189 | 1186 | 60   | 3.06 | 3.03 | 1237 | 1225 | 62   | 3.29 | 3.24 | 1285 | 1262 | 65   | 3.55 | 3.46 |
| 8400                                                                     |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 8800                                                                     |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |

| MODELS: DFC3003W, DFC3004W, DFC3007W • STANDARD STATIC TO 5HP (0.8 ~2.2 ESP) |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|------------------------------------------------------------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| CFM                                                                          | 0.8  |      |      |      |      | 1    |      |      |      |      | 1.2  |      |      |      |      | 1.4  |      |      |      |      |
|                                                                              | RPM1 | RPM2 | DDC% | BHP1 | BHP2 | RPM1 | RPM2 | DDC% | BHP1 | BHP2 | RPM1 | RPM2 | DDC% | BHP1 | BHP2 | RPM1 | RPM2 | DDC% | BHP1 | BHP2 |
| 7000                                                                         | 840  | 831  | 34   | 1.30 | 1.29 | 894  | 908  | 36   | 1.48 | 1.50 | 947  | 972  | 39   | 1.69 | 1.73 | 1003 | 1041 | 42   | 1.93 | 2.00 |
| 7500                                                                         | 874  | 856  | 39   | 1.54 | 1.51 | 925  | 933  | 41   | 1.73 | 1.74 | 979  | 996  | 44   | 1.96 | 1.98 | 1036 | 1064 | 48   | 2.21 | 2.26 |
| 8000                                                                         | 914  | 886  | 44   | 1.82 | 1.77 | 963  | 961  | 47   | 2.03 | 2.01 | 1018 | 1024 | 50   | 2.27 | 2.26 | 1074 | 1090 | 53   | 2.54 | 2.54 |
| 8500                                                                         | 959  | 922  | 50   | 2.15 | 2.06 | 1007 | 993  | 53   | 2.37 | 2.31 | 1062 | 1053 | 56   | 2.62 | 2.57 | 1117 | 1117 | 59   | 2.90 | 2.86 |
| 9000                                                                         | 1010 | 963  | 57   | 2.52 | 2.39 | 1058 | 1029 | 59   | 2.75 | 2.65 | 1112 | 1086 | 62   | 3.01 | 2.91 | 1165 | 1146 | 66   | 3.29 | 3.20 |
| 9500                                                                         | 1067 | 1009 | 64   | 2.93 | 2.76 | 1115 | 1069 | 66   | 3.18 | 3.02 | 1168 | 1121 | 69   | 3.44 | 3.28 | 1218 | 1177 | 73   | 3.72 | 3.57 |
| 10000                                                                        | 1129 | 1061 | 71   | 3.38 | 3.17 | 1179 | 1113 | 74   | 3.65 | 3.43 | 1230 | 1159 | 77   | 3.91 | 3.68 | 1276 | 1209 | 80   | 4.18 | 3.96 |
| 10500                                                                        | 1197 | 1118 | 79   | 3.88 | 3.62 | 1250 | 1161 | 82   | 4.16 | 3.88 | 1298 | 1200 | 84   | 4.41 | 4.11 | 1340 | 1244 | 88   | 4.68 | 4.38 |
| 11000                                                                        | 1270 | 1181 | 87   | 4.42 | 4.11 | 1328 | 1213 | 90   | 4.71 | 4.36 | 1371 | 1243 | 93   | 4.96 | 4.58 | 1408 | 1280 | 96   | 5.21 | 4.82 |
| CFM                                                                          | 1.6  |      |      |      |      | 1.8  |      |      |      |      | 2    |      |      |      |      | 2.2  |      |      |      |      |
|                                                                              | RPM1 | RPM2 | DDC% | BHP1 | BHP2 | RPM1 | RPM2 | DDC% | BHP1 | BHP2 | RPM1 | RPM2 | DDC% | BHP1 | BHP2 | RPM1 | RPM2 | DDC% | BHP1 | BHP2 |
| 7000                                                                         | 1072 | 1099 | 46   | 2.20 | 2.26 | 1128 | 1142 | 49   | 2.44 | 2.47 | 1179 | 1183 | 51   | 2.65 | 2.66 | 1229 | 1225 | 54   | 2.90 | 2.88 |
| 7500                                                                         | 1102 | 1122 | 51   | 2.50 | 2.52 | 1157 | 1164 | 54   | 2.74 | 2.74 | 1206 | 1203 | 56   | 2.96 | 2.94 | 1256 | 1243 | 59   | 3.21 | 3.16 |
| 8000                                                                         | 1137 | 1146 | 57   | 2.82 | 2.82 | 1189 | 1186 | 60   | 3.06 | 3.03 | 1237 | 1225 | 62   | 3.29 | 3.24 | 1285 | 1262 | 65   | 3.55 | 3.46 |
| 8500                                                                         | 1175 | 1171 | 63   | 3.18 | 3.13 | 1224 | 1210 | 65   | 3.42 | 3.35 | 1270 | 1247 | 68   | 3.65 | 3.56 | 1316 | 1282 | 71   | 3.90 | 3.78 |
| 9000                                                                         | 1218 | 1197 | 69   | 3.56 | 3.47 | 1262 | 1234 | 72   | 3.80 | 3.68 | 1306 | 1270 | 74   | 4.03 | 3.90 | 1350 | 1302 | 77   | 4.28 | 4.11 |
| 9500                                                                         | 1265 | 1224 | 76   | 3.98 | 3.83 | 1303 | 1260 | 78   | 4.21 | 4.04 | 1344 | 1294 | 81   | 4.45 | 4.26 | 1386 | 1323 | 83   | 4.69 | 4.46 |
| 10000                                                                        | 1316 | 1252 | 83   | 4.43 | 4.21 | 1348 | 1286 | 85   | 4.64 | 4.42 | 1386 | 1318 | 87   | 4.88 | 4.63 | 1424 | 1343 | 89   | 5.11 | 4.83 |
| 10500                                                                        |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 11000                                                                        |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |

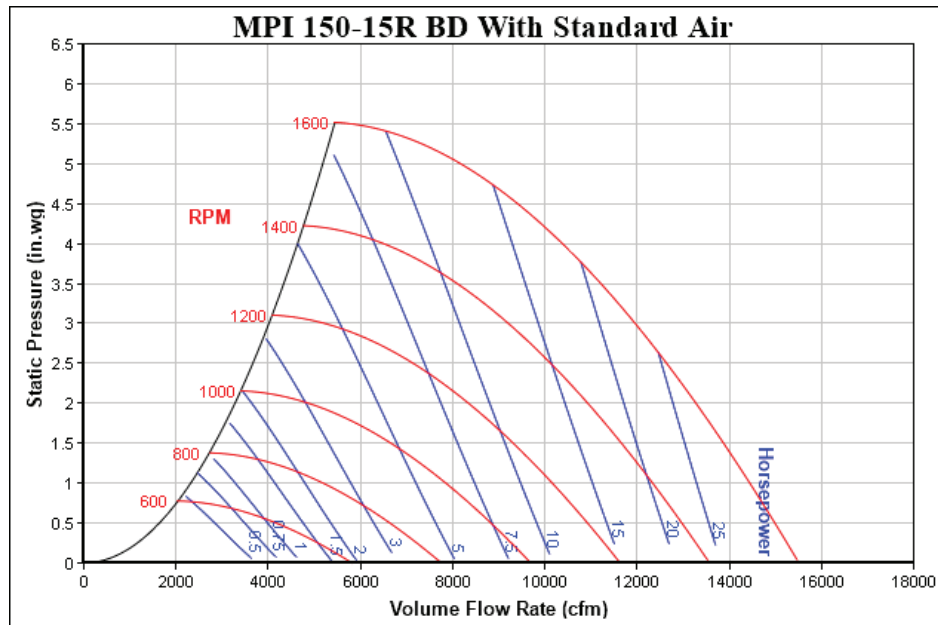

| AIRFLOW PRESSURE DROP OF DOWNFLOW ECONOMIZER FOR 15 TO 25 TON ROOFTOP UNITS (100% RETURN AIR) |      |      |      |      |      |      |      |      |      |      |      |       |
|-----------------------------------------------------------------------------------------------|------|------|------|------|------|------|------|------|------|------|------|-------|
| SCFM                                                                                          | 4500 | 5000 | 5500 | 6000 | 6500 | 7000 | 7500 | 8000 | 8500 | 9000 | 9500 | 10000 |
| (In WG)                                                                                       | 0.15 | 0.18 | 0.22 | 0.27 | 0.32 | 0.37 | 0.42 | 0.48 | 0.55 | 0.61 | 0.69 | 0.76  |

| MODEL NUMBER | ELECTRICAL RATING | COMPRESSOR |     |     | OUTDOOR FAN MOTOR |      |     | INDOOR FAN MOTOR |     |      | OPTIONAL ELECTRIC HEAT |           |           | OPTIONAL POWERED CONVENIENCE OUTLET | OPTIONAL POWER EXHAUST | OPTIONAL POWER EXHAUST (MODULATING) | POWER SUPPLY |         |
|--------------|-------------------|------------|-----|-----|-------------------|------|-----|------------------|-----|------|------------------------|-----------|-----------|-------------------------------------|------------------------|-------------------------------------|--------------|---------|
|              |                   | QTY        | RLA | LRA | QTY               | HP   | FLA | QTY              | HP  | FLA  | PART #                 | KW*       | FLA       | FLA                                 | FLA                    | FLA                                 | MCA          | MOP     |
| DFC1803D     | 208/230/3/60      | 2          | 25  | 164 | 3                 | 0.33 | 2   | 2                | 3.5 | 10.9 | -                      | -         | -         | -                                   | -                      | -                                   | 84.0/84.0    | 100/100 |
|              |                   |            |     |     |                   |      |     |                  |     |      | -                      | -         | -         | -                                   | 4.8                    | -                                   | 88.8/88.8    | 110/110 |
|              |                   |            |     |     |                   |      |     |                  |     |      | -                      | -         | -         | -                                   | -                      | 13.9                                | 97.9/97.9    | 110/110 |
|              |                   |            |     |     |                   |      |     |                  |     |      | -                      | -         | -         | 9.6/8.7                             | -                      | -                                   | 93.6/92.7    | 110/110 |
|              |                   |            |     |     |                   |      |     |                  |     |      | -                      | -         | -         | 9.6/8.7                             | 4.8                    | -                                   | 98.4/97.5    | 110/110 |
|              |                   |            |     |     |                   |      |     |                  |     |      | -                      | -         | -         | 9.6/8.7                             | -                      | 13.9                                | 108/107      | 125/125 |
|              |                   |            |     |     |                   |      |     |                  |     |      | EH**-3L30              | 21.6/28.8 | 60.0/69.3 | -                                   | -                      | -                                   | 102/114      | 110/125 |
|              |                   |            |     |     |                   |      |     |                  |     |      |                        |           |           | -                                   | 4.8                    | -                                   | 108/120      | 110/125 |
|              |                   |            |     |     |                   |      |     |                  |     |      |                        |           |           | -                                   | -                      | 13.9                                | 120/131      | 125/150 |
|              |                   |            |     |     |                   |      |     |                  |     |      |                        |           |           | 9.6/8.7                             | -                      | -                                   | 114/125      | 125/125 |
|              |                   |            |     |     |                   |      |     |                  |     |      |                        |           |           | 9.6/8.7                             | 4.8                    | -                                   | 120/131      | 125/150 |
|              |                   |            |     |     |                   |      |     |                  |     |      |                        |           |           | 9.6/8.7                             | -                      | 13.9                                | 132/142      | 150/150 |
|              |                   |            |     |     |                   |      |     |                  |     |      | EH**-3L45              | 32.5/43.2 | 90.1/104  | -                                   | -                      | -                                   | 140/157      | 150/175 |
|              |                   |            |     |     |                   |      |     |                  |     |      |                        |           |           | -                                   | 4.8                    | -                                   | 146/163      | 150/175 |
|              |                   |            |     |     |                   |      |     |                  |     |      |                        |           |           | -                                   | -                      | 13.9                                | 157/175      | 175/175 |
|              |                   |            |     |     |                   |      |     |                  |     |      |                        |           |           | 9.6/8.7                             | -                      | -                                   | 152/168      | 175/175 |
|              |                   |            |     |     |                   |      |     |                  |     |      |                        |           |           | 9.6/8.7                             | 4.8                    | -                                   | 158/174      | 175/175 |
|              |                   |            |     |     |                   |      |     |                  |     |      |                        |           |           | 9.6/8.7                             | -                      | 13.9                                | 169/185      | 175/200 |
|              |                   |            |     |     |                   |      |     |                  |     |      | EH**-3L60              | 43.3/57.6 | 120/139   | -                                   | -                      | -                                   | 177/166      | 200/175 |
|              |                   |            |     |     |                   |      |     |                  |     |      |                        |           |           | -                                   | 4.8                    | -                                   | 183/172      | 200/175 |
|              |                   |            |     |     |                   |      |     |                  |     |      |                        |           |           | -                                   | -                      | 13.9                                | 195/183      | 200/200 |
|              |                   |            |     |     |                   |      |     |                  |     |      |                        |           |           | 9.6/8.7                             | -                      | -                                   | 189/177      | 200/200 |
|              |                   |            |     |     |                   |      |     |                  |     |      |                        |           |           | 9.6/8.7                             | 4.8                    | -                                   | 195/183      | 200/200 |
|              |                   |            |     |     |                   |      |     |                  |     |      |                        |           |           | 9.6/8.7                             | -                      | 13.9                                | 207/194      | 225/200 |
| DFC1803W     | 208/230/3/60      | 2          | 25  | 164 | 3                 | 0.33 | 2   | 2                | 5   | 14.5 | -                      | -         | -         | -                                   | -                      | -                                   | 91.2/91.2    | 110/110 |
|              |                   |            |     |     |                   |      |     |                  |     |      | -                      | -         | -         | -                                   | 4.8                    | -                                   | 96.0/96.0    | 110/110 |
|              |                   |            |     |     |                   |      |     |                  |     |      | -                      | -         | -         | -                                   | -                      | 13.9                                | 105/105      | 125/125 |
|              |                   |            |     |     |                   |      |     |                  |     |      | -                      | -         | -         | 9.6/8.7                             | -                      | -                                   | 101/99.9     | 125/110 |
|              |                   |            |     |     |                   |      |     |                  |     |      | -                      | -         | -         | 9.6/8.7                             | 4.8                    | -                                   | 106/105      | 125/125 |
|              |                   |            |     |     |                   |      |     |                  |     |      | -                      | -         | -         | 9.6/8.7                             | -                      | 13.9                                | 115/114      | 125/125 |
|              |                   |            |     |     |                   |      |     |                  |     |      | EH**-3L30              | 21.6/28.8 | 60.0/69.3 | -                                   | -                      | -                                   | 111/123      | 125/125 |
|              |                   |            |     |     |                   |      |     |                  |     |      |                        |           |           | -                                   | 4.8                    | -                                   | 117/129      | 125/150 |
|              |                   |            |     |     |                   |      |     |                  |     |      |                        |           |           | -                                   | -                      | 13.9                                | 129/140      | 150/150 |
|              |                   |            |     |     |                   |      |     |                  |     |      |                        |           |           | 9.6/8.7                             | -                      | -                                   | 123/134      | 125/150 |
|              |                   |            |     |     |                   |      |     |                  |     |      |                        |           |           | 9.6/8.7                             | 4.8                    | -                                   | 129/140      | 150/150 |
|              |                   |            |     |     |                   |      |     |                  |     |      |                        |           |           | 9.6/8.7                             | -                      | 13.9                                | 141/151      | 150/175 |
|              |                   |            |     |     |                   |      |     |                  |     |      | EH**-3L45              | 32.5/43.2 | 90.1/104  | -                                   | -                      | -                                   | 149/166      | 150/175 |
|              |                   |            |     |     |                   |      |     |                  |     |      |                        |           |           | -                                   | 4.8                    | -                                   | 155/172      | 175/175 |
|              |                   |            |     |     |                   |      |     |                  |     |      |                        |           |           | -                                   | -                      | 13.9                                | 166/184      | 175/200 |
|              |                   |            |     |     |                   |      |     |                  |     |      |                        |           |           | 9.6/8.7                             | -                      | -                                   | 161/177      | 175/200 |
|              |                   |            |     |     |                   |      |     |                  |     |      |                        |           |           | 9.6/8.7                             | 4.8                    | -                                   | 167/183      | 175/200 |
|              |                   |            |     |     |                   |      |     |                  |     |      |                        |           |           | 9.6/8.7                             | -                      | 13.9                                | 178/194      | 200/200 |
|              |                   |            |     |     |                   |      |     |                  |     |      | EH**-3L60              | 43.3/57.6 | 120/139   | -                                   | -                      | -                                   | 186/175      | 200/175 |
|              |                   |            |     |     |                   |      |     |                  |     |      |                        |           |           | -                                   | 4.8                    | -                                   | 192/181      | 200/200 |
|              |                   |            |     |     |                   |      |     |                  |     |      |                        |           |           | -                                   | -                      | 13.9                                | 204/192      | 225/200 |
|              |                   |            |     |     |                   |      |     |                  |     |      |                        |           |           | 9.6/8.7                             | -                      | -                                   | 198/186      | 200/200 |
|              |                   |            |     |     |                   |      |     |                  |     |      |                        |           |           | 9.6/8.7                             | 4.8                    | -                                   | 204/192      | 225/200 |
|              |                   |            |     |     |                   |      |     |                  |     |      |                        |           |           | 9.6/8.7                             | -                      | 13.9                                | 216/203      | 225/225 |

| MODEL NUMBER | ELECTRICAL RATING | COMPRESSOR |      |     | OUTDOOR FAN MOTOR |      |      | INDOOR FAN MOTOR |     |      | OPTIONAL ELECTRIC HEAT |      |      | OPTIONAL POWERED CONVENIENCE OUTLET | OPTIONAL POWER EXHAUST | OPTIONAL POWER EXHAUST (MODULATING) | POWER SUPPLY |     |
|--------------|-------------------|------------|------|-----|-------------------|------|------|------------------|-----|------|------------------------|------|------|-------------------------------------|------------------------|-------------------------------------|--------------|-----|
|              |                   | QTY        | RLA  | LRA | QTY               | HP   | FLA  | QTY              | HP  | FLA  | PART #                 | KW*  | FLA  | FLA                                 | FLA                    | FLA                                 | MCA          | MOP |
| DFC1804D     | 460/3/60          | 2          | 12.2 | 100 | 3                 | 0.33 | 0.85 | 2                | 3.5 | 7.2  | -                      | -    | -    | -                                   | -                      | -                                   | 44.4         | 50  |
|              |                   |            |      |     |                   |      |      |                  |     |      | -                      | -    | -    | -                                   | 2.4                    | -                                   | 46.8         | 50  |
|              |                   |            |      |     |                   |      |      |                  |     |      | -                      | -    | -    | -                                   | -                      | 8.1                                 | 52.5         | 60  |
|              |                   |            |      |     |                   |      |      |                  |     |      | -                      | -    | -    | 4.3                                 | -                      | -                                   | 48.7         | 60  |
|              |                   |            |      |     |                   |      |      |                  |     |      | -                      | -    | -    | 4.3                                 | 2.4                    | -                                   | 51.1         | 60  |
|              |                   |            |      |     |                   |      |      |                  |     |      | -                      | -    | -    | 4.3                                 | -                      | 8.1                                 | 56.8         | 60  |
|              |                   |            |      |     |                   |      |      |                  |     |      | EH**-4L30              | 28.8 | 34.6 | -                                   | -                      | -                                   | 61.3         | 70  |
|              |                   |            |      |     |                   |      |      |                  |     |      |                        |      |      | -                                   | 2.4                    | -                                   | 64.3         | 70  |
|              |                   |            |      |     |                   |      |      |                  |     |      |                        |      |      | -                                   | -                      | 8.1                                 | 71.4         | 80  |
|              |                   |            |      |     |                   |      |      |                  |     |      |                        |      |      | 4.3                                 | -                      | -                                   | 66.7         | 70  |
|              |                   |            |      |     |                   |      |      |                  |     |      |                        |      |      | 4.3                                 | 2.4                    | -                                   | 69.7         | 70  |
|              |                   |            |      |     |                   |      |      |                  |     |      |                        |      |      | 4.3                                 | -                      | 8.1                                 | 76.8         | 80  |
|              |                   |            |      |     |                   |      |      |                  |     |      | EH**-4L45              | 43.2 | 52   | -                                   | -                      | -                                   | 83.0         | 90  |
|              |                   |            |      |     |                   |      |      |                  |     |      |                        |      |      | -                                   | 2.4                    | -                                   | 86.0         | 90  |
|              |                   |            |      |     |                   |      |      |                  |     |      |                        |      |      | -                                   | -                      | 8.1                                 | 93.1         | 100 |
|              |                   |            |      |     |                   |      |      |                  |     |      |                        |      |      | 4.3                                 | -                      | -                                   | 88.3         | 90  |
|              |                   |            |      |     |                   |      |      |                  |     |      |                        |      |      | 4.3                                 | 2.4                    | -                                   | 91.3         | 100 |
|              |                   |            |      |     |                   |      |      |                  |     |      |                        |      |      | 4.3                                 | -                      | 8.1                                 | 98.5         | 100 |
|              |                   |            |      |     |                   |      |      |                  |     |      | EH**-4L60              | 57.6 | 69.3 | -                                   | -                      | -                                   | 87.3         | 90  |
|              |                   |            |      |     |                   |      |      |                  |     |      |                        |      |      | -                                   | 2.4                    | -                                   | 90.3         | 100 |
|              |                   |            |      |     |                   |      |      |                  |     |      |                        |      |      | -                                   | -                      | 8.1                                 | 97.4         | 100 |
|              |                   |            |      |     |                   |      |      |                  |     |      |                        |      |      | 4.3                                 | -                      | -                                   | 92.7         | 100 |
|              |                   |            |      |     |                   |      |      |                  |     |      |                        |      |      | 4.3                                 | 2.4                    | -                                   | 95.7         | 100 |
|              |                   |            |      |     |                   |      |      |                  |     |      |                        |      |      | 4.3                                 | -                      | 8.1                                 | 103          | 110 |
| DFC1804W     | 460/3/60          | 2          | 12.2 | 100 | 3                 | 0.33 | 0.85 | 2                | 5   | 10.6 | -                      | -    | -    | -                                   | -                      | -                                   | 51.2         | 60  |
|              |                   |            |      |     |                   |      |      |                  |     |      | -                      | -    | -    | -                                   | 2.4                    | -                                   | 53.6         | 60  |
|              |                   |            |      |     |                   |      |      |                  |     |      | -                      | -    | -    | -                                   | -                      | 8.1                                 | 59.3         | 70  |
|              |                   |            |      |     |                   |      |      |                  |     |      | -                      | -    | -    | 4.3                                 | -                      | -                                   | 55.5         | 60  |
|              |                   |            |      |     |                   |      |      |                  |     |      | -                      | -    | -    | 4.3                                 | 2.4                    | -                                   | 57.9         | 70  |
|              |                   |            |      |     |                   |      |      |                  |     |      | -                      | -    | -    | 4.3                                 | -                      | 8.1                                 | 63.6         | 70  |
|              |                   |            |      |     |                   |      |      |                  |     |      | EH**-4L30              | 28.8 | 34.6 | -                                   | -                      | -                                   | 69.8         | 70  |
|              |                   |            |      |     |                   |      |      |                  |     |      |                        |      |      | -                                   | 2.4                    | -                                   | 72.8         | 80  |
|              |                   |            |      |     |                   |      |      |                  |     |      |                        |      |      | -                                   | -                      | 8.1                                 | 79.9         | 80  |
|              |                   |            |      |     |                   |      |      |                  |     |      |                        |      |      | 4.3                                 | -                      | -                                   | 75.2         | 80  |
|              |                   |            |      |     |                   |      |      |                  |     |      |                        |      |      | 4.3                                 | 2.4                    | -                                   | 78.2         | 80  |
|              |                   |            |      |     |                   |      |      |                  |     |      |                        |      |      | 4.3                                 | -                      | 8.1                                 | 85.3         | 90  |
|              |                   |            |      |     |                   |      |      |                  |     |      | EH**-4L45              | 43.2 | 52   | -                                   | -                      | -                                   | 91.5         | 100 |
|              |                   |            |      |     |                   |      |      |                  |     |      |                        |      |      | -                                   | 2.4                    | -                                   | 94.5         | 100 |
|              |                   |            |      |     |                   |      |      |                  |     |      |                        |      |      | -                                   | -                      | 8.1                                 | 102          | 110 |
|              |                   |            |      |     |                   |      |      |                  |     |      |                        |      |      | 4.3                                 | -                      | -                                   | 96.8         | 100 |
|              |                   |            |      |     |                   |      |      |                  |     |      |                        |      |      | 4.3                                 | 2.4                    | -                                   | 99.8         | 100 |
|              |                   |            |      |     |                   |      |      |                  |     |      |                        |      |      | 4.3                                 | -                      | 8.1                                 | 107          | 110 |
|              |                   |            |      |     |                   |      |      |                  |     |      | EH**-4L60              | 57.6 | 69.3 | -                                   | -                      | -                                   | 95.8         | 100 |
|              |                   |            |      |     |                   |      |      |                  |     |      |                        |      |      | -                                   | 2.4                    | -                                   | 98.8         | 100 |
|              |                   |            |      |     |                   |      |      |                  |     |      |                        |      |      | -                                   | -                      | 8.1                                 | 106          | 110 |
|              |                   |            |      |     |                   |      |      |                  |     |      |                        |      |      | 4.3                                 | -                      | -                                   | 101          | 110 |
|              |                   |            |      |     |                   |      |      |                  |     |      |                        |      |      | 4.3                                 | 2.4                    | -                                   | 104          | 110 |
|              |                   |            |      |     |                   |      |      |                  |     |      |                        |      |      | 4.3                                 | -                      | 8.1                                 | 111          | 125 |

| MODEL NUMBER | ELECTRICAL RATING | COMPRESSOR |     |     | OUTDOOR FAN MOTOR |      |      | INDOOR FAN MOTOR |     |     | OPTIONAL ELECTRIC HEAT |      |      | OPTIONAL POWERED CONVENIENCE OUTLET | OPTIONAL POWER EXHAUST | OPTIONAL POWER EXHAUST (MODULATING) | POWER SUPPLY |     |
|--------------|-------------------|------------|-----|-----|-------------------|------|------|------------------|-----|-----|------------------------|------|------|-------------------------------------|------------------------|-------------------------------------|--------------|-----|
|              |                   | QTY        | RLA | LRA | QTY               | HP   | FLA  | QTY              | HP  | FLA | PART #                 | KW*  | FLA  | FLA                                 | FLA                    | FLA                                 | MCA          | MOP |
| DFC1807D     | 575/3/60          | 2          | 9   | 78  | 3                 | 0.33 | 0.67 | 2                | 3.5 | 5   | -                      | -    | -    | -                                   | -                      | -                                   | 32.2         | 40  |
|              |                   |            |     |     |                   |      |      |                  |     |     | -                      | -    | -    | -                                   | 2                      | -                                   | 34.2         | 40  |
|              |                   |            |     |     |                   |      |      |                  |     |     | -                      | -    | -    | -                                   | -                      | 8.3                                 | 40.5         | 45  |
|              |                   |            |     |     |                   |      |      |                  |     |     | -                      | -    | -    | 3.5                                 | -                      | -                                   | 35.7         | 40  |
|              |                   |            |     |     |                   |      |      |                  |     |     | -                      | -    | -    | 3.5                                 | 2                      | -                                   | 37.7         | 45  |
|              |                   |            |     |     |                   |      |      |                  |     |     | -                      | -    | -    | 3.5                                 | -                      | 8.3                                 | 44.0         | 50  |
|              |                   |            |     |     |                   |      |      |                  |     |     | EH**-7L30              | 28.8 | 27.7 | -                                   | -                      | -                                   | 47.1         | 50  |
|              |                   |            |     |     |                   |      |      |                  |     |     |                        |      |      | -                                   | 2                      | -                                   | 49.6         | 50  |
|              |                   |            |     |     |                   |      |      |                  |     |     |                        |      |      | -                                   | -                      | 8.3                                 | 57.5         | 60  |
|              |                   |            |     |     |                   |      |      |                  |     |     |                        |      |      | 3.5                                 | -                      | -                                   | 51.5         | 60  |
|              |                   |            |     |     |                   |      |      |                  |     |     |                        |      |      | 3.5                                 | 2                      | -                                   | 54.0         | 60  |
|              |                   |            |     |     |                   |      |      |                  |     |     |                        |      |      | 3.5                                 | -                      | 8.3                                 | 61.9         | 70  |
|              |                   |            |     |     |                   |      |      |                  |     |     | EH**-7L45              | 43.2 | 41.6 | -                                   | -                      | -                                   | 64.5         | 70  |
|              |                   |            |     |     |                   |      |      |                  |     |     |                        |      |      | -                                   | 2                      | -                                   | 67.0         | 70  |
|              |                   |            |     |     |                   |      |      |                  |     |     |                        |      |      | -                                   | -                      | 8.3                                 | 74.8         | 80  |
|              |                   |            |     |     |                   |      |      |                  |     |     |                        |      |      | 3.5                                 | -                      | -                                   | 68.8         | 70  |
|              |                   |            |     |     |                   |      |      |                  |     |     |                        |      |      | 3.5                                 | 2                      | -                                   | 71.3         | 80  |
|              |                   |            |     |     |                   |      |      |                  |     |     |                        |      |      | 3.5                                 | -                      | 8.3                                 | 79.2         | 80  |
|              |                   |            |     |     |                   |      |      |                  |     |     | EH**-7L60              | 57.6 | 55.4 | -                                   | -                      | -                                   | 67.9         | 70  |
|              |                   |            |     |     |                   |      |      |                  |     |     |                        |      |      | -                                   | 2                      | -                                   | 70.4         | 80  |
|              |                   |            |     |     |                   |      |      |                  |     |     |                        |      |      | -                                   | -                      | 8.3                                 | 78.3         | 80  |
|              |                   |            |     |     |                   |      |      |                  |     |     |                        |      |      | 3.5                                 | -                      | -                                   | 72.3         | 80  |
|              |                   |            |     |     |                   |      |      |                  |     |     |                        |      |      | 3.5                                 | 2                      | -                                   | 74.8         | 80  |
|              |                   |            |     |     |                   |      |      |                  |     |     |                        |      |      | 3.5                                 | -                      | 8.3                                 | 82.7         | 90  |
| DFC1807W     | 575/3/60          | 2          | 9   | 78  | 3                 | 0.33 | 0.67 | 2                | 5   | 7.2 | -                      | -    | -    | -                                   | -                      | -                                   | 36.6         | 45  |
|              |                   |            |     |     |                   |      |      |                  |     |     | -                      | -    | -    | -                                   | 2                      | -                                   | 38.6         | 45  |
|              |                   |            |     |     |                   |      |      |                  |     |     | -                      | -    | -    | -                                   | -                      | 8.3                                 | 44.9         | 50  |
|              |                   |            |     |     |                   |      |      |                  |     |     | -                      | -    | -    | 3.5                                 | -                      | -                                   | 40.1         | 45  |
|              |                   |            |     |     |                   |      |      |                  |     |     | -                      | -    | -    | 3.5                                 | 2                      | -                                   | 42.1         | 50  |
|              |                   |            |     |     |                   |      |      |                  |     |     | -                      | -    | -    | 3.5                                 | -                      | 8.3                                 | 48.4         | 50  |
|              |                   |            |     |     |                   |      |      |                  |     |     | EH**-7L30              | 28.8 | 27.7 | -                                   | -                      | -                                   | 52.6         | 60  |
|              |                   |            |     |     |                   |      |      |                  |     |     |                        |      |      | -                                   | 2                      | -                                   | 55.1         | 60  |
|              |                   |            |     |     |                   |      |      |                  |     |     |                        |      |      | -                                   | -                      | 8.3                                 | 63.0         | 70  |
|              |                   |            |     |     |                   |      |      |                  |     |     |                        |      |      | 3.5                                 | -                      | -                                   | 57.0         | 60  |
|              |                   |            |     |     |                   |      |      |                  |     |     |                        |      |      | 3.5                                 | 2                      | -                                   | 59.5         | 60  |
|              |                   |            |     |     |                   |      |      |                  |     |     |                        |      |      | 3.5                                 | -                      | 8.3                                 | 67.4         | 70  |
|              |                   |            |     |     |                   |      |      |                  |     |     | EH**-7L45              | 43.2 | 41.6 | -                                   | -                      | -                                   | 70.0         | 70  |
|              |                   |            |     |     |                   |      |      |                  |     |     |                        |      |      | -                                   | 2                      | -                                   | 72.5         | 80  |
|              |                   |            |     |     |                   |      |      |                  |     |     |                        |      |      | -                                   | -                      | 8.3                                 | 80.3         | 90  |
|              |                   |            |     |     |                   |      |      |                  |     |     |                        |      |      | 3.5                                 | -                      | -                                   | 74.3         | 80  |
|              |                   |            |     |     |                   |      |      |                  |     |     |                        |      |      | 3.5                                 | 2                      | -                                   | 76.8         | 80  |
|              |                   |            |     |     |                   |      |      |                  |     |     |                        |      |      | 3.5                                 | -                      | 8.3                                 | 84.7         | 90  |
|              |                   |            |     |     |                   |      |      |                  |     |     | EH**-7L60              | 57.6 | 55.4 | -                                   | -                      | -                                   | 73.4         | 80  |
|              |                   |            |     |     |                   |      |      |                  |     |     |                        |      |      | -                                   | 2                      | -                                   | 75.9         | 80  |
|              |                   |            |     |     |                   |      |      |                  |     |     |                        |      |      | -                                   | -                      | 8.3                                 | 83.8         | 90  |
|              |                   |            |     |     |                   |      |      |                  |     |     |                        |      |      | 3.5                                 | -                      | -                                   | 77.8         | 80  |
|              |                   |            |     |     |                   |      |      |                  |     |     |                        |      |      | 3.5                                 | 2                      | -                                   | 80.3         | 90  |
|              |                   |            |     |     |                   |      |      |                  |     |     |                        |      |      | 3.5                                 | -                      | 8.3                                 | 88.2         | 90  |

| MODEL NUMBER | ELECTRICAL RATING | COMPRESSOR |      |     | OUTDOOR FAN MOTOR |     |     | INDOOR FAN MOTOR |     |      | OPTIONAL ELECTRIC HEAT |           |           | OPTIONAL POWERED CONVENIENCE OUTLET | OPTIONAL POWER EXHAUST | OPTIONAL POWER EXHAUST (MODULATING) | POWER SUPPLY |         |
|--------------|-------------------|------------|------|-----|-------------------|-----|-----|------------------|-----|------|------------------------|-----------|-----------|-------------------------------------|------------------------|-------------------------------------|--------------|---------|
|              |                   | QTY        | RLA  | LRA | QTY               | HP  | FLA | QTY              | HP  | FLA  | PART #                 | KW*       | FLA       | FLA                                 | FLA                    | FLA                                 | MCA          | MOP     |
| DFC2403D     | 208/230/3/60      | 2          | 28.2 | 240 | 4                 | 0.5 | 2.7 | 2                | 3.5 | 10.9 | -                      | -         | -         | -                                   | -                      | -                                   | 96.1/96.1    | 110/110 |
|              |                   |            |      |     |                   |     |     |                  |     |      | -                      | -         | -         | -                                   | 4.8                    | -                                   | 101/101      | 125/125 |
|              |                   |            |      |     |                   |     |     |                  |     |      | -                      | -         | -         | -                                   | -                      | 13.9                                | 110/110      | 125/125 |
|              |                   |            |      |     |                   |     |     |                  |     |      | -                      | -         | -         | 9.6/8.7                             | -                      | -                                   | 106/105      | 125/125 |
|              |                   |            |      |     |                   |     |     |                  |     |      | -                      | -         | -         | 9.6/8.7                             | 4.8                    | -                                   | 110/110      | 125/125 |
|              |                   |            |      |     |                   |     |     |                  |     |      | -                      | -         | -         | 9.6/8.7                             | -                      | 13.9                                | 120/119      | 125/125 |
|              |                   |            |      |     |                   |     |     |                  |     |      | EH**-3L30              | 21.6/28.8 | 60.0/69.3 | -                                   | -                      | -                                   | 102/114      | 110/125 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |           |           | -                                   | 4.8                    | -                                   | 108/120      | 125/125 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |           |           | -                                   | -                      | 13.9                                | 120/131      | 125/150 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |           |           | 9.6/8.7                             | -                      | -                                   | 114/125      | 125/125 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |           |           | 9.6/8.7                             | 4.8                    | -                                   | 120/131      | 125/150 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |           |           | 9.6/8.7                             | -                      | 13.9                                | 132/142      | 150/150 |
|              |                   |            |      |     |                   |     |     |                  |     |      | EH**-3L45              | 32.5/43.2 | 90.1/104  | -                                   | -                      | -                                   | 140/157      | 150/175 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |           |           | -                                   | 4.8                    | -                                   | 146/163      | 150/175 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |           |           | -                                   | -                      | 13.9                                | 157/175      | 175/175 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |           |           | 9.6/8.7                             | -                      | -                                   | 152/168      | 175/175 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |           |           | 9.6/8.7                             | 4.8                    | -                                   | 158/174      | 175/175 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |           |           | 9.6/8.7                             | -                      | 13.9                                | 169/185      | 175/200 |
|              |                   |            |      |     |                   |     |     |                  |     |      | EH**-3L60              | 43.3/57.6 | 120/139   | -                                   | -                      | -                                   | 177/166      | 200/175 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |           |           | -                                   | 4.8                    | -                                   | 183/172      | 200/175 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |           |           | -                                   | -                      | 13.9                                | 195/183      | 200/200 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |           |           | 9.6/8.7                             | -                      | -                                   | 189/177      | 200/200 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |           |           | 9.6/8.7                             | 4.8                    | -                                   | 195/183      | 200/200 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |           |           | 9.6/8.7                             | -                      | 13.9                                | 207/194      | 225/200 |
|              |                   |            |      |     |                   |     |     |                  |     |      | EH**-3L75              | 54.1/72.0 | 150/173   | -                                   | -                      | -                                   | 177/200      | 200/225 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |           |           | -                                   | 4.8                    | -                                   | 183/206      | 200/225 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |           |           | -                                   | -                      | 13.9                                | 195/218      | 200/225 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |           |           | 9.6/8.7                             | -                      | -                                   | 189/211      | 200/225 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |           |           | 9.6/8.7                             | 4.8                    | -                                   | 195/217      | 200/225 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |           |           | 9.6/8.7                             | -                      | 13.9                                | 207/229      | 225/250 |
| DFC2403W     | 208/230/3/60      | 2          | 28.2 | 240 | 4                 | 0.5 | 2.7 | 2                | 5   | 14.5 | -                      | -         | -         | -                                   | -                      | -                                   | 103/103      | 125/125 |
|              |                   |            |      |     |                   |     |     |                  |     |      | -                      | -         | -         | -                                   | 4.8                    | -                                   | 108/108      | 125/125 |
|              |                   |            |      |     |                   |     |     |                  |     |      | -                      | -         | -         | -                                   | -                      | 13.9                                | 117/117      | 125/125 |
|              |                   |            |      |     |                   |     |     |                  |     |      | -                      | -         | -         | 9.6/8.7                             | -                      | -                                   | 113/112      | 125/125 |
|              |                   |            |      |     |                   |     |     |                  |     |      | -                      | -         | -         | 9.6/8.7                             | 4.8                    | -                                   | 118/117      | 125/125 |
|              |                   |            |      |     |                   |     |     |                  |     |      | -                      | -         | -         | 9.6/8.7                             | -                      | 13.9                                | 127/126      | 150/150 |
|              |                   |            |      |     |                   |     |     |                  |     |      | EH**-3L30              | 21.6/28.8 | 60.0/69.3 | -                                   | -                      | -                                   | 111/123      | 125/125 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |           |           | -                                   | 4.8                    | -                                   | 117/129      | 125/150 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |           |           | -                                   | -                      | 13.9                                | 129/140      | 150/150 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |           |           | 9.6/8.7                             | -                      | -                                   | 123/134      | 125/150 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |           |           | 9.6/8.7                             | 4.8                    | -                                   | 129/140      | 150/150 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |           |           | 9.6/8.7                             | -                      | 13.9                                | 141/151      | 150/175 |
|              |                   |            |      |     |                   |     |     |                  |     |      | EH**-3L45              | 32.5/43.2 | 90.1/104  | -                                   | -                      | -                                   | 149/166      | 150/175 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |           |           | -                                   | 4.8                    | -                                   | 155/172      | 175/175 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |           |           | -                                   | -                      | 13.9                                | 166/184      | 175/200 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |           |           | 9.6/8.7                             | -                      | -                                   | 161/177      | 175/200 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |           |           | 9.6/8.7                             | 4.8                    | -                                   | 167/183      | 175/200 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |           |           | 9.6/8.7                             | -                      | 13.9                                | 178/194      | 200/200 |
|              |                   |            |      |     |                   |     |     |                  |     |      | EH**-3L60              | 43.3/57.6 | 120/139   | -                                   | -                      | -                                   | 186/175      | 200/175 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |           |           | -                                   | 4.8                    | -                                   | 192/181      | 200/200 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |           |           | -                                   | -                      | 13.9                                | 204/192      | 225/200 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |           |           | 9.6/8.7                             | -                      | -                                   | 198/186      | 200/200 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |           |           | 9.6/8.7                             | 4.8                    | -                                   | 204/192      | 225/200 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |           |           | 9.6/8.7                             | -                      | 13.9                                | 216/203      | 225/225 |
|              |                   |            |      |     |                   |     |     |                  |     |      | EH**-3L75              | 54.1/72.0 | 150/173   | -                                   | -                      | -                                   | 186/209      | 200/225 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |           |           | -                                   | 4.8                    | -                                   | 192/215      | 200/225 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |           |           | -                                   | -                      | 13.9                                | 204/227      | 225/250 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |           |           | 9.6/8.7                             | -                      | -                                   | 198/220      | 200/225 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |           |           | 9.6/8.7                             | 4.8                    | -                                   | 204/226      | 225/250 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |           |           | 9.6/8.7                             | -                      | 13.9                                | 216/238      | 225/250 |

| MODEL NUMBER | ELECTRICAL RATING | COMPRESSOR |      |     | OUTDOOR FAN MOTOR |     |     | INDOOR FAN MOTOR |     |      | OPTIONAL ELECTRIC HEAT |      |      | OPTIONAL POWERED CONVENIENCE OUTLET | OPTIONAL POWER EXHAUST | OPTIONAL POWER EXHAUST (MODULATING) | POWER SUPPLY |     |
|--------------|-------------------|------------|------|-----|-------------------|-----|-----|------------------|-----|------|------------------------|------|------|-------------------------------------|------------------------|-------------------------------------|--------------|-----|
|              |                   | QTY        | RLA  | LRA | QTY               | HP  | FLA | QTY              | HP  | FLA  | PART #                 | KW*  | FLA  | FLA                                 | FLA                    | FLA                                 | MCA          | MOP |
| DFC2404D     | 460/3/60          | 2          | 14.7 | 130 | 4                 | 0.5 | 1.4 | 2                | 3.5 | 7.2  | -                      | -    | -    | -                                   | -                      | -                                   | 53.2         | 60  |
|              |                   |            |      |     |                   |     |     |                  |     |      | -                      | -    | -    | -                                   | 2.4                    | -                                   | 55.6         | 70  |
|              |                   |            |      |     |                   |     |     |                  |     |      | -                      | -    | -    | -                                   | -                      | 8.1                                 | 61.3         | 70  |
|              |                   |            |      |     |                   |     |     |                  |     |      | -                      | -    | -    | 4.3                                 | -                      | -                                   | 57.5         | 70  |
|              |                   |            |      |     |                   |     |     |                  |     |      | -                      | -    | -    | 4.3                                 | 2.4                    | -                                   | 59.9         | 70  |
|              |                   |            |      |     |                   |     |     |                  |     |      | -                      | -    | -    | 4.3                                 | -                      | 8.1                                 | 65.6         | 80  |
|              |                   |            |      |     |                   |     |     |                  |     |      | EH**-4L30              | 28.8 | 34.6 | -                                   | -                      | -                                   | 61.3         | 70  |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |      |      | -                                   | 2.4                    | -                                   | 64.3         | 70  |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |      |      | -                                   | -                      | 8.1                                 | 71.4         | 80  |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |      |      | 4.3                                 | -                      | -                                   | 66.7         | 70  |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |      |      | 4.3                                 | 2.4                    | -                                   | 69.7         | 70  |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |      |      | 4.3                                 | -                      | 8.1                                 | 76.8         | 80  |
|              |                   |            |      |     |                   |     |     |                  |     |      | EH**-4L45              | 43.2 | 52   | -                                   | -                      | -                                   | 83.0         | 90  |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |      |      | -                                   | 2.4                    | -                                   | 86.0         | 90  |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |      |      | -                                   | -                      | 8.1                                 | 93.1         | 100 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |      |      | 4.3                                 | -                      | -                                   | 88.3         | 90  |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |      |      | 4.3                                 | 2.4                    | -                                   | 91.3         | 100 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |      |      | 4.3                                 | -                      | 8.1                                 | 98.5         | 100 |
|              |                   |            |      |     |                   |     |     |                  |     |      | EH**-4L60              | 57.6 | 69.3 | -                                   | -                      | -                                   | 87.3         | 90  |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |      |      | -                                   | 2.4                    | -                                   | 90.3         | 100 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |      |      | -                                   | -                      | 8.1                                 | 97.4         | 100 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |      |      | 4.3                                 | -                      | -                                   | 92.7         | 100 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |      |      | 4.3                                 | 2.4                    | -                                   | 95.7         | 100 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |      |      | 4.3                                 | -                      | 8.1                                 | 103          | 110 |
|              |                   |            |      |     |                   |     |     |                  |     |      | EH**-4L75              | 72   | 86.6 | -                                   | -                      | -                                   | 105          | 110 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |      |      | -                                   | 2.4                    | -                                   | 108          | 110 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |      |      | -                                   | -                      | 8.1                                 | 115          | 125 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |      |      | 4.3                                 | -                      | -                                   | 110          | 110 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |      |      | 4.3                                 | 2.4                    | -                                   | 113          | 125 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |      |      | 4.3                                 | -                      | 8.1                                 | 120          | 125 |
| DFC2404W     | 460/3/60          | 2          | 14.7 | 130 | 4                 | 0.5 | 1.4 | 2                | 5   | 10.6 | -                      | -    | -    | -                                   | -                      | -                                   | 60.0         | 70  |
|              |                   |            |      |     |                   |     |     |                  |     |      | -                      | -    | -    | -                                   | 2.4                    | -                                   | 62.4         | 70  |
|              |                   |            |      |     |                   |     |     |                  |     |      | -                      | -    | -    | -                                   | -                      | 8.1                                 | 68.1         | 80  |
|              |                   |            |      |     |                   |     |     |                  |     |      | -                      | -    | -    | 4.3                                 | -                      | -                                   | 64.3         | 70  |
|              |                   |            |      |     |                   |     |     |                  |     |      | -                      | -    | -    | 4.3                                 | 2.4                    | -                                   | 66.7         | 80  |
|              |                   |            |      |     |                   |     |     |                  |     |      | -                      | -    | -    | 4.3                                 | -                      | 8.1                                 | 72.4         | 80  |
|              |                   |            |      |     |                   |     |     |                  |     |      | EH**-4L30              | 28.8 | 34.6 | -                                   | -                      | -                                   | 69.8         | 70  |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |      |      | -                                   | 2.4                    | -                                   | 72.8         | 80  |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |      |      | -                                   | -                      | 8.1                                 | 79.9         | 80  |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |      |      | 4.3                                 | -                      | -                                   | 75.2         | 80  |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |      |      | 4.3                                 | 2.4                    | -                                   | 78.2         | 80  |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |      |      | 4.3                                 | -                      | 8.1                                 | 85.3         | 90  |
|              |                   |            |      |     |                   |     |     |                  |     |      | EH**-4L45              | 43.2 | 52   | -                                   | -                      | -                                   | 91.5         | 100 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |      |      | -                                   | 2.4                    | -                                   | 94.5         | 100 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |      |      | -                                   | -                      | 8.1                                 | 102          | 110 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |      |      | 4.3                                 | -                      | -                                   | 96.8         | 100 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |      |      | 4.3                                 | 2.4                    | -                                   | 99.8         | 100 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |      |      | 4.3                                 | -                      | 8.1                                 | 107          | 110 |
|              |                   |            |      |     |                   |     |     |                  |     |      | EH**-4L60              | 57.6 | 69.3 | -                                   | -                      | -                                   | 95.8         | 100 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |      |      | -                                   | 2.4                    | -                                   | 98.8         | 100 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |      |      | -                                   | -                      | 8.1                                 | 106          | 110 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |      |      | 4.3                                 | -                      | -                                   | 101          | 110 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |      |      | 4.3                                 | 2.4                    | -                                   | 104          | 110 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |      |      | 4.3                                 | -                      | 8.1                                 | 111          | 125 |
|              |                   |            |      |     |                   |     |     |                  |     |      | EH**-4L75              | 72   | 86.6 | -                                   | -                      | -                                   | 113          | 125 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |      |      | -                                   | 2.4                    | -                                   | 116          | 125 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |      |      | -                                   | -                      | 8.1                                 | 123          | 125 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |      |      | 4.3                                 | -                      | -                                   | 118          | 125 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |      |      | 4.3                                 | 2.4                    | -                                   | 121          | 125 |
|              |                   |            |      |     |                   |     |     |                  |     |      |                        |      |      | 4.3                                 | -                      | 8.1                                 | 129          | 150 |

| MODEL NUMBER | ELECTRICAL RATING | COMPRESSOR |      |      | OUTDOOR FAN MOTOR |     |     | INDOOR FAN MOTOR |     |     | OPTIONAL ELECTRIC HEAT |      |      | OPTIONAL POWERED CONVENIENCE OUTLET | OPTIONAL POWER EXHAUST | OPTIONAL POWER EXHAUST (MODULATING) | POWER SUPPLY |     |
|--------------|-------------------|------------|------|------|-------------------|-----|-----|------------------|-----|-----|------------------------|------|------|-------------------------------------|------------------------|-------------------------------------|--------------|-----|
|              |                   | QTY        | RLA  | LRA  | QTY               | HP  | FLA | QTY              | HP  | FLA | PART #                 | KW*  | FLA  | FLA                                 | FLA                    | FLA                                 | MCA          | MOP |
| DFC2407D     | 575/3/60          | 2          | 11.3 | 93.7 | 4                 | 0.5 | 1   | 2                | 3.5 | 5   | -                      | -    | -    | -                                   | -                      | -                                   | 39.4         | 50  |
|              |                   |            |      |      |                   |     |     |                  |     |     | -                      | -    | -    | -                                   | 2                      | -                                   | 41.4         | 50  |
|              |                   |            |      |      |                   |     |     |                  |     |     | -                      | -    | -    | -                                   | -                      | 8.3                                 | 47.7         | 50  |
|              |                   |            |      |      |                   |     |     |                  |     |     | -                      | -    | -    | 3.5                                 | -                      | -                                   | 42.9         | 50  |
|              |                   |            |      |      |                   |     |     |                  |     |     | -                      | -    | -    | 3.5                                 | 2                      | -                                   | 44.9         | 50  |
|              |                   |            |      |      |                   |     |     |                  |     |     | -                      | -    | -    | 3.5                                 | -                      | 8.3                                 | 51.2         | 60  |
|              |                   |            |      |      |                   |     |     |                  |     |     | EH**-7L30              | 28.8 | 27.7 | -                                   | -                      | -                                   | 47.1         | 50  |
|              |                   |            |      |      |                   |     |     |                  |     |     |                        |      |      | -                                   | 2                      | -                                   | 49.6         | 50  |
|              |                   |            |      |      |                   |     |     |                  |     |     |                        |      |      | -                                   | -                      | 8.3                                 | 57.5         | 60  |
|              |                   |            |      |      |                   |     |     |                  |     |     |                        |      |      | 3.5                                 | -                      | -                                   | 51.5         | 60  |
|              |                   |            |      |      |                   |     |     |                  |     |     |                        |      |      | 3.5                                 | 2                      | -                                   | 54.0         | 60  |
|              |                   |            |      |      |                   |     |     |                  |     |     |                        |      |      | 3.5                                 | -                      | 8.3                                 | 61.9         | 70  |
|              |                   |            |      |      |                   |     |     |                  |     |     | EH**-7L45              | 43.2 | 41.6 | -                                   | -                      | -                                   | 64.5         | 70  |
|              |                   |            |      |      |                   |     |     |                  |     |     |                        |      |      | -                                   | 2                      | -                                   | 67.0         | 70  |
|              |                   |            |      |      |                   |     |     |                  |     |     |                        |      |      | -                                   | -                      | 8.3                                 | 74.8         | 80  |
|              |                   |            |      |      |                   |     |     |                  |     |     |                        |      |      | 3.5                                 | -                      | -                                   | 68.8         | 70  |
|              |                   |            |      |      |                   |     |     |                  |     |     |                        |      |      | 3.5                                 | 2                      | -                                   | 71.3         | 80  |
|              |                   |            |      |      |                   |     |     |                  |     |     |                        |      |      | 3.5                                 | -                      | 8.3                                 | 79.2         | 80  |
|              |                   |            |      |      |                   |     |     |                  |     |     | EH**-7L60              | 57.6 | 55.4 | -                                   | -                      | -                                   | 67.9         | 70  |
|              |                   |            |      |      |                   |     |     |                  |     |     |                        |      |      | -                                   | 2                      | -                                   | 70.4         | 80  |
|              |                   |            |      |      |                   |     |     |                  |     |     |                        |      |      | -                                   | -                      | 8.3                                 | 78.3         | 80  |
|              |                   |            |      |      |                   |     |     |                  |     |     |                        |      |      | 3.5                                 | -                      | -                                   | 72.3         | 80  |
|              |                   |            |      |      |                   |     |     |                  |     |     |                        |      |      | 3.5                                 | 2                      | -                                   | 74.8         | 80  |
|              |                   |            |      |      |                   |     |     |                  |     |     |                        |      |      | 3.5                                 | -                      | 8.3                                 | 82.7         | 90  |
|              |                   |            |      |      |                   |     |     |                  |     |     | EH**-7L75              | 72   | 69.3 | -                                   | -                      | -                                   | 81.8         | 90  |
|              |                   |            |      |      |                   |     |     |                  |     |     |                        |      |      | -                                   | 2                      | -                                   | 84.3         | 90  |
|              |                   |            |      |      |                   |     |     |                  |     |     |                        |      |      | -                                   | -                      | 8.3                                 | 92.2         | 100 |
|              |                   |            |      |      |                   |     |     |                  |     |     |                        |      |      | 3.5                                 | -                      | -                                   | 86.2         | 90  |
|              |                   |            |      |      |                   |     |     |                  |     |     |                        |      |      | 3.5                                 | 2                      | -                                   | 88.7         | 90  |
|              |                   |            |      |      |                   |     |     |                  |     |     |                        |      |      | 3.5                                 | -                      | 8.3                                 | 96.5         | 100 |
| DFC2407W     | 575/3/60          | 2          | 11.3 | 93.7 | 4                 | 0.5 | 1   | 2                | 5   | 7.2 | -                      | -    | -    | -                                   | -                      | -                                   | 43.8         | 50  |
|              |                   |            |      |      |                   |     |     |                  |     |     | -                      | -    | -    | -                                   | 2                      | -                                   | 45.8         | 50  |
|              |                   |            |      |      |                   |     |     |                  |     |     | -                      | -    | -    | -                                   | -                      | 8.3                                 | 52.1         | 60  |
|              |                   |            |      |      |                   |     |     |                  |     |     | -                      | -    | -    | 3.5                                 | -                      | -                                   | 47.3         | 50  |
|              |                   |            |      |      |                   |     |     |                  |     |     | -                      | -    | -    | 3.5                                 | 2                      | -                                   | 49.3         | 60  |
|              |                   |            |      |      |                   |     |     |                  |     |     | -                      | -    | -    | 3.5                                 | -                      | 8.3                                 | 55.6         | 60  |
|              |                   |            |      |      |                   |     |     |                  |     |     | EH**-7L30              | 28.8 | 27.7 | -                                   | -                      | -                                   | 52.6         | 60  |
|              |                   |            |      |      |                   |     |     |                  |     |     |                        |      |      | -                                   | 2                      | -                                   | 55.1         | 60  |
|              |                   |            |      |      |                   |     |     |                  |     |     |                        |      |      | -                                   | -                      | 8.3                                 | 63.0         | 70  |
|              |                   |            |      |      |                   |     |     |                  |     |     |                        |      |      | 3.5                                 | -                      | -                                   | 57.0         | 60  |
|              |                   |            |      |      |                   |     |     |                  |     |     |                        |      |      | 3.5                                 | 2                      | -                                   | 59.5         | 60  |
|              |                   |            |      |      |                   |     |     |                  |     |     |                        |      |      | 3.5                                 | -                      | 8.3                                 | 67.4         | 70  |
|              |                   |            |      |      |                   |     |     |                  |     |     | EH**-7L45              | 43.2 | 41.6 | -                                   | -                      | -                                   | 70.0         | 70  |
|              |                   |            |      |      |                   |     |     |                  |     |     |                        |      |      | -                                   | 2                      | -                                   | 72.5         | 80  |
|              |                   |            |      |      |                   |     |     |                  |     |     |                        |      |      | -                                   | -                      | 8.3                                 | 80.3         | 90  |
|              |                   |            |      |      |                   |     |     |                  |     |     |                        |      |      | 3.5                                 | -                      | -                                   | 74.3         | 80  |
|              |                   |            |      |      |                   |     |     |                  |     |     |                        |      |      | 3.5                                 | 2                      | -                                   | 76.8         | 80  |
|              |                   |            |      |      |                   |     |     |                  |     |     |                        |      |      | 3.5                                 | -                      | 8.3                                 | 84.7         | 90  |
|              |                   |            |      |      |                   |     |     |                  |     |     | EH**-7L60              | 57.6 | 55.4 | -                                   | -                      | -                                   | 73.4         | 80  |
|              |                   |            |      |      |                   |     |     |                  |     |     |                        |      |      | -                                   | 2                      | -                                   | 75.9         | 80  |
|              |                   |            |      |      |                   |     |     |                  |     |     |                        |      |      | -                                   | -                      | 8.3                                 | 83.8         | 90  |
|              |                   |            |      |      |                   |     |     |                  |     |     |                        |      |      | 3.5                                 | -                      | -                                   | 77.8         | 80  |
|              |                   |            |      |      |                   |     |     |                  |     |     |                        |      |      | 3.5                                 | 2                      | -                                   | 80.3         | 90  |
|              |                   |            |      |      |                   |     |     |                  |     |     |                        |      |      | 3.5                                 | -                      | 8.3                                 | 88.2         | 90  |
|              |                   |            |      |      |                   |     |     |                  |     |     | EH**-7L75              | 72   | 69.3 | -                                   | -                      | -                                   | 87.3         | 90  |
|              |                   |            |      |      |                   |     |     |                  |     |     |                        |      |      | -                                   | 2                      | -                                   | 89.8         | 90  |
|              |                   |            |      |      |                   |     |     |                  |     |     |                        |      |      | -                                   | -                      | 8.3                                 | 97.7         | 100 |
|              |                   |            |      |      |                   |     |     |                  |     |     |                        |      |      | 3.5                                 | -                      | -                                   | 91.7         | 100 |
|              |                   |            |      |      |                   |     |     |                  |     |     |                        |      |      | 3.5                                 | 2                      | -                                   | 94.2         | 100 |
|              |                   |            |      |      |                   |     |     |                  |     |     |                        |      |      | 3.5                                 | -                      | 8.3                                 | 102          | 110 |

| MODEL NUMBER | ELECTRICAL RATING | COMPRESSOR |      |     | OUTDOOR FAN MOTOR |     |     | INDOOR FAN MOTOR |    |      | OPTIONAL ELECTRIC HEAT |           |           | OPTIONAL POWERED CONVENIENCE OUTLET | OPTIONAL POWER EXHAUST | OPTIONAL POWER EXHAUST (MODULATING) | POWER SUPPLY |         |
|--------------|-------------------|------------|------|-----|-------------------|-----|-----|------------------|----|------|------------------------|-----------|-----------|-------------------------------------|------------------------|-------------------------------------|--------------|---------|
|              |                   | QTY        | RLA  | LRA | QTY               | HP  | FLA | QTY              | HP | FLA  | PART #                 | KW*       | FLA       | FLA                                 | FLA                    | FLA                                 | MCA          | MOP     |
| DFC3003D     | 208/230/3/60      | 2          | 48.1 | 245 | 5                 | 0.5 | 2.7 | 2                | 5  | 14.5 | -                      | -         | -         | -                                   | -                      | -                                   | 151/151      | 175/175 |
|              |                   |            |      |     |                   |     |     |                  |    |      | -                      | -         | -         | -                                   | 4.8                    | -                                   | 155/155      | 200/200 |
|              |                   |            |      |     |                   |     |     |                  |    |      | -                      | -         | -         | -                                   | -                      | 13.9                                | 165/165      | 200/200 |
|              |                   |            |      |     |                   |     |     |                  |    |      | -                      | -         | -         | 9.6/8.7                             | -                      | -                                   | 160/159      | 200/200 |
|              |                   |            |      |     |                   |     |     |                  |    |      | -                      | -         | -         | 9.6/8.7                             | 4.8                    | -                                   | 165/164      | 200/200 |
|              |                   |            |      |     |                   |     |     |                  |    |      | -                      | -         | -         | 9.6/8.7                             | -                      | 13.9                                | 174/173      | 200/200 |
|              |                   |            |      |     |                   |     |     |                  |    |      | EH**-3L30              | 21.6/28.8 | 60.0/69.3 | -                                   | -                      | -                                   | 151/151      | 175/175 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |           |           | -                                   | 4.8                    | -                                   | 155/155      | 200/200 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |           |           | -                                   | -                      | 13.9                                | 165/165      | 200/200 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |           |           | 9.6/8.7                             | -                      | -                                   | 160/159      | 200/200 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |           |           | 9.6/8.7                             | 4.8                    | -                                   | 165/164      | 200/200 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |           |           | 9.6/8.7                             | -                      | 13.9                                | 174/173      | 200/200 |
|              |                   |            |      |     |                   |     |     |                  |    |      | EH**-3L45              | 32.5/43.2 | 90.1/104  | -                                   | -                      | -                                   | 151/166      | 175/175 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |           |           | -                                   | 4.8                    | -                                   | 155/172      | 200/200 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |           |           | -                                   | -                      | 13.9                                | 166/184      | 200/200 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |           |           | 9.6/8.7                             | -                      | -                                   | 161/177      | 200/200 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |           |           | 9.6/8.7                             | 4.8                    | -                                   | 167/183      | 200/200 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |           |           | 9.6/8.7                             | -                      | 13.9                                | 178/194      | 200/200 |
|              |                   |            |      |     |                   |     |     |                  |    |      | EH**-3L60              | 43.3/57.6 | 120/139   | -                                   | -                      | -                                   | 186/175      | 200/175 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |           |           | -                                   | 4.8                    | -                                   | 192/181      | 200/200 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |           |           | -                                   | -                      | 13.9                                | 204/192      | 225/200 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |           |           | 9.6/8.7                             | -                      | -                                   | 198/186      | 200/200 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |           |           | 9.6/8.7                             | 4.8                    | -                                   | 204/192      | 225/200 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |           |           | 9.6/8.7                             | -                      | 13.9                                | 216/203      | 225/225 |
|              |                   |            |      |     |                   |     |     |                  |    |      | EH**-3L75              | 54.1/72.0 | 150/173   | -                                   | -                      | -                                   | 186/209      | 200/225 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |           |           | -                                   | 4.8                    | -                                   | 192/215      | 200/225 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |           |           | -                                   | -                      | 13.9                                | 204/227      | 225/250 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |           |           | 9.6/8.7                             | -                      | -                                   | 198/220      | 200/225 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |           |           | 9.6/8.7                             | 4.8                    | -                                   | 204/226      | 225/250 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |           |           | 9.6/8.7                             | -                      | 13.9                                | 216/238      | 225/250 |
| DFC3003W     | 208/230/3/60      | 2          | 48.1 | 245 | 5                 | 0.5 | 2.7 | 2                | 5  | 14.5 | -                      | -         | -         | -                                   | -                      | -                                   | 151/151      | 175/175 |
|              |                   |            |      |     |                   |     |     |                  |    |      | -                      | -         | -         | -                                   | 4.8                    | -                                   | 155/155      | 200/200 |
|              |                   |            |      |     |                   |     |     |                  |    |      | -                      | -         | -         | -                                   | -                      | 13.9                                | 165/165      | 200/200 |
|              |                   |            |      |     |                   |     |     |                  |    |      | -                      | -         | -         | 9.6/8.7                             | -                      | -                                   | 160/159      | 200/200 |
|              |                   |            |      |     |                   |     |     |                  |    |      | -                      | -         | -         | 9.6/8.7                             | 4.8                    | -                                   | 165/164      | 200/200 |
|              |                   |            |      |     |                   |     |     |                  |    |      | -                      | -         | -         | 9.6/8.7                             | -                      | 13.9                                | 174/173      | 200/200 |
|              |                   |            |      |     |                   |     |     |                  |    |      | EH**-3L30              | 21.6/28.8 | 60.0/69.3 | -                                   | -                      | -                                   | 151/151      | 175/175 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |           |           | -                                   | 4.8                    | -                                   | 155/155      | 200/200 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |           |           | -                                   | -                      | 13.9                                | 165/165      | 200/200 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |           |           | 9.6/8.7                             | -                      | -                                   | 160/159      | 200/200 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |           |           | 9.6/8.7                             | 4.8                    | -                                   | 165/164      | 200/200 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |           |           | 9.6/8.7                             | -                      | 13.9                                | 174/173      | 200/200 |
|              |                   |            |      |     |                   |     |     |                  |    |      | EH**-3L45              | 32.5/43.2 | 90.1/104  | -                                   | -                      | -                                   | 151/166      | 175/175 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |           |           | -                                   | 4.8                    | -                                   | 155/172      | 200/200 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |           |           | -                                   | -                      | 13.9                                | 166/184      | 200/200 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |           |           | 9.6/8.7                             | -                      | -                                   | 161/177      | 200/200 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |           |           | 9.6/8.7                             | 4.8                    | -                                   | 167/183      | 200/200 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |           |           | 9.6/8.7                             | -                      | 13.9                                | 178/194      | 200/200 |
|              |                   |            |      |     |                   |     |     |                  |    |      | EH**-3L60              | 43.3/57.6 | 120/139   | -                                   | -                      | -                                   | 186/175      | 200/175 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |           |           | -                                   | 4.8                    | -                                   | 192/181      | 200/200 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |           |           | -                                   | -                      | 13.9                                | 204/192      | 225/200 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |           |           | 9.6/8.7                             | -                      | -                                   | 198/186      | 200/200 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |           |           | 9.6/8.7                             | 4.8                    | -                                   | 204/192      | 225/200 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |           |           | 9.6/8.7                             | -                      | 13.9                                | 216/203      | 225/225 |
|              |                   |            |      |     |                   |     |     |                  |    |      | EH**-3L75              | 54.1/72.0 | 150/173   | -                                   | -                      | -                                   | 186/209      | 200/225 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |           |           | -                                   | 4.8                    | -                                   | 192/215      | 200/225 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |           |           | -                                   | -                      | 13.9                                | 204/227      | 225/250 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |           |           | 9.6/8.7                             | -                      | -                                   | 198/220      | 200/225 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |           |           | 9.6/8.7                             | 4.8                    | -                                   | 204/226      | 225/250 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |           |           | 9.6/8.7                             | -                      | 13.9                                | 216/238      | 225/250 |


| MODEL NUMBER | ELECTRICAL RATING | COMPRESSOR |      |     | OUTDOOR FAN MOTOR |     |     | INDOOR FAN MOTOR |    |      | OPTIONAL ELECTRIC HEAT |      |      | OPTIONAL POWERED CONVENIENCE OUTLET | OPTIONAL POWER EXHAUST | OPTIONAL POWER EXHAUST (MODULATING) | POWER SUPPLY |     |
|--------------|-------------------|------------|------|-----|-------------------|-----|-----|------------------|----|------|------------------------|------|------|-------------------------------------|------------------------|-------------------------------------|--------------|-----|
|              |                   | QTY        | RLA  | LRA | QTY               | HP  | FLA | QTY              | HP | FLA  | PART #                 | KW*  | FLA  | FLA                                 | FLA                    | FLA                                 | MCA          | MOP |
| DFC3004D     | 460/3/60          | 2          | 18.6 | 125 | 5                 | 0.5 | 1.4 | 2                | 5  | 10.6 | -                      | -    | -    | -                                   | -                      | -                                   | 70.0         | 80  |
|              |                   |            |      |     |                   |     |     |                  |    |      | -                      | -    | -    | -                                   | 2.4                    | -                                   | 72.4         | 90  |
|              |                   |            |      |     |                   |     |     |                  |    |      | -                      | -    | -    | -                                   | -                      | 8.1                                 | 78.1         | 90  |
|              |                   |            |      |     |                   |     |     |                  |    |      | -                      | -    | -    | 4.3                                 | -                      | -                                   | 74.3         | 90  |
|              |                   |            |      |     |                   |     |     |                  |    |      | -                      | -    | -    | 4.3                                 | 2.4                    | -                                   | 76.7         | 90  |
|              |                   |            |      |     |                   |     |     |                  |    |      | -                      | -    | -    | 4.3                                 | -                      | 8.1                                 | 82.4         | 100 |
|              |                   |            |      |     |                   |     |     |                  |    |      | EH**-4L30              | 28.8 | 34.6 | -                                   | -                      | -                                   | 70.0         | 80  |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |      |      | -                                   | 2.4                    | -                                   | 72.8         | 90  |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |      |      | -                                   | -                      | 8.1                                 | 79.9         | 90  |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |      |      | 4.3                                 | -                      | -                                   | 75.2         | 90  |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |      |      | 4.3                                 | 2.4                    | -                                   | 78.2         | 90  |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |      |      | 4.3                                 | -                      | 8.1                                 | 85.3         | 100 |
|              |                   |            |      |     |                   |     |     |                  |    |      | EH**-4L45              | 43.2 | 52   | -                                   | -                      | -                                   | 91.5         | 100 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |      |      | -                                   | 2.4                    | -                                   | 94.5         | 100 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |      |      | -                                   | -                      | 8.1                                 | 102          | 110 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |      |      | 4.3                                 | -                      | -                                   | 96.8         | 100 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |      |      | 4.3                                 | 2.4                    | -                                   | 99.8         | 100 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |      |      | 4.3                                 | -                      | 8.1                                 | 107          | 110 |
|              |                   |            |      |     |                   |     |     |                  |    |      | EH**-4L60              | 57.6 | 69.3 | -                                   | -                      | -                                   | 95.8         | 100 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |      |      | -                                   | 2.4                    | -                                   | 98.8         | 100 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |      |      | -                                   | -                      | 8.1                                 | 106          | 110 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |      |      | 4.3                                 | -                      | -                                   | 101          | 110 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |      |      | 4.3                                 | 2.4                    | -                                   | 104          | 110 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |      |      | 4.3                                 | -                      | 8.1                                 | 111          | 125 |
|              |                   |            |      |     |                   |     |     |                  |    |      | EH**-4L75              | 72   | 86.6 | -                                   | -                      | -                                   | 113          | 125 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |      |      | -                                   | 2.4                    | -                                   | 116          | 125 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |      |      | -                                   | -                      | 8.1                                 | 123          | 125 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |      |      | 4.3                                 | -                      | -                                   | 118          | 125 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |      |      | 4.3                                 | 2.4                    | -                                   | 121          | 125 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |      |      | 4.3                                 | -                      | 8.1                                 | 129          | 150 |
| DFC3004W     | 460/3/60          | 2          | 18.6 | 125 | 5                 | 0.5 | 1.4 | 2                | 5  | 10.6 | -                      | -    | -    | -                                   | -                      | -                                   | 70.0         | 80  |
|              |                   |            |      |     |                   |     |     |                  |    |      | -                      | -    | -    | -                                   | 2.4                    | -                                   | 72.4         | 90  |
|              |                   |            |      |     |                   |     |     |                  |    |      | -                      | -    | -    | -                                   | -                      | 8.1                                 | 78.1         | 90  |
|              |                   |            |      |     |                   |     |     |                  |    |      | -                      | -    | -    | 4.3                                 | -                      | -                                   | 74.3         | 90  |
|              |                   |            |      |     |                   |     |     |                  |    |      | -                      | -    | -    | 4.3                                 | 2.4                    | -                                   | 76.7         | 90  |
|              |                   |            |      |     |                   |     |     |                  |    |      | -                      | -    | -    | 4.3                                 | -                      | 8.1                                 | 82.4         | 100 |
|              |                   |            |      |     |                   |     |     |                  |    |      | EH**-4L30              | 28.8 | 34.6 | -                                   | -                      | -                                   | 70.0         | 80  |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |      |      | -                                   | 2.4                    | -                                   | 72.8         | 90  |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |      |      | -                                   | -                      | 8.1                                 | 79.9         | 90  |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |      |      | 4.3                                 | -                      | -                                   | 75.2         | 90  |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |      |      | 4.3                                 | 2.4                    | -                                   | 78.2         | 90  |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |      |      | 4.3                                 | -                      | 8.1                                 | 85.3         | 100 |
|              |                   |            |      |     |                   |     |     |                  |    |      | EH**-4L45              | 43.2 | 52   | -                                   | -                      | -                                   | 91.5         | 100 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |      |      | -                                   | 2.4                    | -                                   | 94.5         | 100 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |      |      | -                                   | -                      | 8.1                                 | 102          | 110 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |      |      | 4.3                                 | -                      | -                                   | 96.8         | 100 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |      |      | 4.3                                 | 2.4                    | -                                   | 99.8         | 100 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |      |      | 4.3                                 | -                      | 8.1                                 | 107          | 110 |
|              |                   |            |      |     |                   |     |     |                  |    |      | EH**-4L60              | 57.6 | 69.3 | -                                   | -                      | -                                   | 95.8         | 100 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |      |      | -                                   | 2.4                    | -                                   | 98.8         | 100 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |      |      | -                                   | -                      | 8.1                                 | 106          | 110 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |      |      | 4.3                                 | -                      | -                                   | 101          | 110 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |      |      | 4.3                                 | 2.4                    | -                                   | 104          | 110 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |      |      | 4.3                                 | -                      | 8.1                                 | 111          | 125 |
|              |                   |            |      |     |                   |     |     |                  |    |      | EH**-4L75              | 72   | 86.6 | -                                   | -                      | -                                   | 113          | 125 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |      |      | -                                   | 2.4                    | -                                   | 116          | 125 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |      |      | -                                   | -                      | 8.1                                 | 123          | 125 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |      |      | 4.3                                 | -                      | -                                   | 118          | 125 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |      |      | 4.3                                 | 2.4                    | -                                   | 121          | 125 |
|              |                   |            |      |     |                   |     |     |                  |    |      |                        |      |      | 4.3                                 | -                      | 8.1                                 | 129          | 150 |

| MODEL NUMBER | ELECTRICAL RATING | COMPRESSOR |      |     | OUTDOOR FAN MOTOR |     |     | INDOOR FAN MOTOR |    |     | OPTIONAL ELECTRIC HEAT |      |      | OPTIONAL POWERED CONVENIENCE OUTLET | OPTIONAL POWER EXHAUST | OPTIONAL POWER EXHAUST (MODULATING) | POWER SUPPLY |     |
|--------------|-------------------|------------|------|-----|-------------------|-----|-----|------------------|----|-----|------------------------|------|------|-------------------------------------|------------------------|-------------------------------------|--------------|-----|
|              |                   | QTY        | RLA  | LRA | QTY               | HP  | FLA | QTY              | HP | FLA | PART #                 | KW*  | FLA  | FLA                                 | FLA                    | FLA                                 | MCA          | MOP |
| DFC3007D     | 575/3/60          | 2          | 14.7 | 100 | 5                 | 0.5 | 1   | 2                | 5  | 7.2 | -                      | -    | -    | -                                   | -                      | -                                   | 52.6         | 60  |
|              |                   |            |      |     |                   |     |     |                  |    |     | -                      | -    | -    | -                                   | 2                      | -                                   | 54.6         | 60  |
|              |                   |            |      |     |                   |     |     |                  |    |     | -                      | -    | -    | -                                   | -                      | 8.3                                 | 60.9         | 70  |
|              |                   |            |      |     |                   |     |     |                  |    |     | -                      | -    | -    | 3.5                                 | -                      | -                                   | 56.1         | 70  |
|              |                   |            |      |     |                   |     |     |                  |    |     | -                      | -    | -    | 3.5                                 | 2                      | -                                   | 58.1         | 70  |
|              |                   |            |      |     |                   |     |     |                  |    |     | -                      | -    | -    | 3.5                                 | -                      | 8.3                                 | 64.4         | 70  |
|              |                   |            |      |     |                   |     |     |                  |    |     | EH**-7L30              | 28.8 | 27.7 | -                                   | -                      | -                                   | 52.6         | 60  |
|              |                   |            |      |     |                   |     |     |                  |    |     |                        |      |      | -                                   | 2                      | -                                   | 55.1         | 60  |
|              |                   |            |      |     |                   |     |     |                  |    |     |                        |      |      | -                                   | -                      | 8.3                                 | 63.0         | 70  |
|              |                   |            |      |     |                   |     |     |                  |    |     |                        |      |      | 3.5                                 | -                      | -                                   | 57.0         | 70  |
|              |                   |            |      |     |                   |     |     |                  |    |     |                        |      |      | 3.5                                 | 2                      | -                                   | 59.5         | 70  |
|              |                   |            |      |     |                   |     |     |                  |    |     |                        |      |      | 3.5                                 | -                      | 8.3                                 | 67.4         | 70  |
|              |                   |            |      |     |                   |     |     |                  |    |     | EH**-7L45              | 43.2 | 41.6 | -                                   | -                      | -                                   | 70.0         | 70  |
|              |                   |            |      |     |                   |     |     |                  |    |     |                        |      |      | -                                   | 2                      | -                                   | 72.5         | 80  |
|              |                   |            |      |     |                   |     |     |                  |    |     |                        |      |      | -                                   | -                      | 8.3                                 | 80.3         | 90  |
|              |                   |            |      |     |                   |     |     |                  |    |     |                        |      |      | 3.5                                 | -                      | -                                   | 74.3         | 80  |
|              |                   |            |      |     |                   |     |     |                  |    |     |                        |      |      | 3.5                                 | 2                      | -                                   | 76.8         | 80  |
|              |                   |            |      |     |                   |     |     |                  |    |     |                        |      |      | 3.5                                 | -                      | 8.3                                 | 84.7         | 90  |
|              |                   |            |      |     |                   |     |     |                  |    |     | EH**-7L60              | 57.6 | 55.4 | -                                   | -                      | -                                   | 73.4         | 80  |
|              |                   |            |      |     |                   |     |     |                  |    |     |                        |      |      | -                                   | 2                      | -                                   | 75.9         | 80  |
|              |                   |            |      |     |                   |     |     |                  |    |     |                        |      |      | -                                   | -                      | 8.3                                 | 83.8         | 90  |
|              |                   |            |      |     |                   |     |     |                  |    |     |                        |      |      | 3.5                                 | -                      | -                                   | 77.8         | 80  |
|              |                   |            |      |     |                   |     |     |                  |    |     |                        |      |      | 3.5                                 | 2                      | -                                   | 80.3         | 90  |
|              |                   |            |      |     |                   |     |     |                  |    |     |                        |      |      | 3.5                                 | -                      | 8.3                                 | 88.2         | 90  |
|              |                   |            |      |     |                   |     |     |                  |    |     | EH**-7L75              | 72   | 69.3 | -                                   | -                      | -                                   | 87.3         | 90  |
|              |                   |            |      |     |                   |     |     |                  |    |     |                        |      |      | -                                   | 2                      | -                                   | 89.8         | 90  |
|              |                   |            |      |     |                   |     |     |                  |    |     |                        |      |      | -                                   | -                      | 8.3                                 | 97.7         | 100 |
|              |                   |            |      |     |                   |     |     |                  |    |     |                        |      |      | 3.5                                 | -                      | -                                   | 91.7         | 100 |
|              |                   |            |      |     |                   |     |     |                  |    |     |                        |      |      | 3.5                                 | 2                      | -                                   | 94.2         | 100 |
|              |                   |            |      |     |                   |     |     |                  |    |     |                        |      |      | 3.5                                 | -                      | 8.3                                 | 102          | 110 |
| DFC3007W     | 575/3/60          | 2          | 14.7 | 100 | 5                 | 0.5 | 1   | 2                | 5  | 7.2 | -                      | -    | -    | -                                   | -                      | -                                   | 52.6         | 60  |
|              |                   |            |      |     |                   |     |     |                  |    |     | -                      | -    | -    | -                                   | 2                      | -                                   | 54.6         | 60  |
|              |                   |            |      |     |                   |     |     |                  |    |     | -                      | -    | -    | -                                   | -                      | 8.3                                 | 60.9         | 70  |
|              |                   |            |      |     |                   |     |     |                  |    |     | -                      | -    | -    | 3.5                                 | -                      | -                                   | 56.1         | 70  |
|              |                   |            |      |     |                   |     |     |                  |    |     | -                      | -    | -    | 3.5                                 | 2                      | -                                   | 58.1         | 70  |
|              |                   |            |      |     |                   |     |     |                  |    |     | -                      | -    | -    | 3.5                                 | -                      | 8.3                                 | 64.4         | 70  |
|              |                   |            |      |     |                   |     |     |                  |    |     | EH**-7L30              | 28.8 | 27.7 | -                                   | -                      | -                                   | 52.6         | 60  |
|              |                   |            |      |     |                   |     |     |                  |    |     |                        |      |      | -                                   | 2                      | -                                   | 55.1         | 60  |
|              |                   |            |      |     |                   |     |     |                  |    |     |                        |      |      | -                                   | -                      | 8.3                                 | 63.0         | 70  |
|              |                   |            |      |     |                   |     |     |                  |    |     |                        |      |      | 3.5                                 | -                      | -                                   | 57.0         | 70  |
|              |                   |            |      |     |                   |     |     |                  |    |     |                        |      |      | 3.5                                 | 2                      | -                                   | 59.5         | 70  |
|              |                   |            |      |     |                   |     |     |                  |    |     |                        |      |      | 3.5                                 | -                      | 8.3                                 | 67.4         | 70  |
|              |                   |            |      |     |                   |     |     |                  |    |     | EH**-7L45              | 43.2 | 41.6 | -                                   | -                      | -                                   | 70.0         | 70  |
|              |                   |            |      |     |                   |     |     |                  |    |     |                        |      |      | -                                   | 2                      | -                                   | 72.5         | 80  |
|              |                   |            |      |     |                   |     |     |                  |    |     |                        |      |      | -                                   | -                      | 8.3                                 | 80.3         | 90  |
|              |                   |            |      |     |                   |     |     |                  |    |     |                        |      |      | 3.5                                 | -                      | -                                   | 74.3         | 80  |
|              |                   |            |      |     |                   |     |     |                  |    |     |                        |      |      | 3.5                                 | 2                      | -                                   | 76.8         | 80  |
|              |                   |            |      |     |                   |     |     |                  |    |     |                        |      |      | 3.5                                 | -                      | 8.3                                 | 84.7         | 90  |
|              |                   |            |      |     |                   |     |     |                  |    |     | EH**-7L60              | 57.6 | 55.4 | -                                   | -                      | -                                   | 73.4         | 80  |
|              |                   |            |      |     |                   |     |     |                  |    |     |                        |      |      | -                                   | 2                      | -                                   | 75.9         | 80  |
|              |                   |            |      |     |                   |     |     |                  |    |     |                        |      |      | -                                   | -                      | 8.3                                 | 83.8         | 90  |
|              |                   |            |      |     |                   |     |     |                  |    |     |                        |      |      | 3.5                                 | -                      | -                                   | 77.8         | 80  |
|              |                   |            |      |     |                   |     |     |                  |    |     |                        |      |      | 3.5                                 | 2                      | -                                   | 80.3         | 90  |
|              |                   |            |      |     |                   |     |     |                  |    |     |                        |      |      | 3.5                                 | -                      | 8.3                                 | 88.2         | 90  |
|              |                   |            |      |     |                   |     |     |                  |    |     | EH**-7L75              | 72   | 69.3 | -                                   | -                      | -                                   | 87.3         | 90  |
|              |                   |            |      |     |                   |     |     |                  |    |     |                        |      |      | -                                   | 2                      | -                                   | 89.8         | 90  |
|              |                   |            |      |     |                   |     |     |                  |    |     |                        |      |      | -                                   | -                      | 8.3                                 | 97.7         | 100 |
|              |                   |            |      |     |                   |     |     |                  |    |     |                        |      |      | 3.5                                 | -                      | -                                   | 91.7         | 100 |
|              |                   |            |      |     |                   |     |     |                  |    |     |                        |      |      | 3.5                                 | 2                      | -                                   | 94.2         | 100 |
|              |                   |            |      |     |                   |     |     |                  |    |     |                        |      |      | 3.5                                 | -                      | 8.3                                 | 102          | 110 |


| AIR FLOW FOR ELECTRIC HEAT |                         |    |             |             |
|----------------------------|-------------------------|----|-------------|-------------|
| UNIT                       | HEATER KIT MODEL NUMBER | kW | MINIMUM CFM | MAXIMUM CFM |
| 15 ton AC STD Static       | EH*.*L30                | 30 | 6000        | 8000        |
|                            | EH*.*L45                | 45 |             |             |
|                            | EH*.*L60                | 60 |             |             |
| 15 ton AC High Static      | EH*.*L30                | 30 | 5250        | 9500        |
|                            | EH*.*L45                | 45 |             |             |
|                            | EH*.*L60                | 60 |             |             |
| 20 ton AC STD Static       | EH*.*L30                | 30 | 7000        | 9400        |
|                            | EH*.*L45                | 45 |             |             |
|                            | EH*.*L60                | 60 |             |             |
|                            | EH*.*L75                | 75 |             |             |
| 20 ton AC High Static      | EH*.*L30                | 30 | 7000        | 10300       |
|                            | EH*.*L45                | 45 |             |             |
|                            | EH*.*L60                | 60 |             |             |
|                            | EH*.*L75                | 75 |             |             |
| 25 ton AC STD Static       | EH*.*L30                | 30 | 8750        | 11000       |
|                            | EH*.*L45                | 45 |             |             |
|                            | EH*.*L60                | 60 |             |             |
|                            | EH*.*L75                | 75 |             |             |
| 25 ton AC High Static      | EH*.*L30                | 30 | 7500        | 11700       |
|                            | EH*.*L45                | 45 |             |             |
|                            | EH*.*L60                | 60 |             |             |
|                            | EH*.*L75                | 75 |             |             |


## HEATER KIT MODEL NUMBER NOMENCLATURE

|                    | E | H | X | - | 3 | L | 30  |
|--------------------|---|---|---|---|---|---|-----|
|                    | 1 | 2 | 3 | - | 4 | 5 | 6,7 |
| Electric           |   |   |   |   |   |   |     |
| Heater             |   |   |   |   |   |   |     |
| Heater Type        |   |   |   |   |   |   |     |
| X Staged           |   |   |   |   |   |   |     |
| S SCR (modulating) |   |   |   |   |   |   |     |
| Voltage            |   |   |   |   |   |   |     |
| 3 208-230/3/60     |   |   |   |   |   |   |     |
| 4 460/3/60         |   |   |   |   |   |   |     |
| 7 575/3/60         |   |   |   |   |   |   |     |
| Chassis            |   |   |   |   |   |   |     |
| L Large            |   |   |   |   |   |   |     |
| Kilowatt           |   |   |   |   |   |   |     |
| 30 30 KW           |   |   |   |   |   |   |     |
| 45 45 KW           |   |   |   |   |   |   |     |
| 60 60 KW           |   |   |   |   |   |   |     |
| 75 75 KW           |   |   |   |   |   |   |     |



Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.



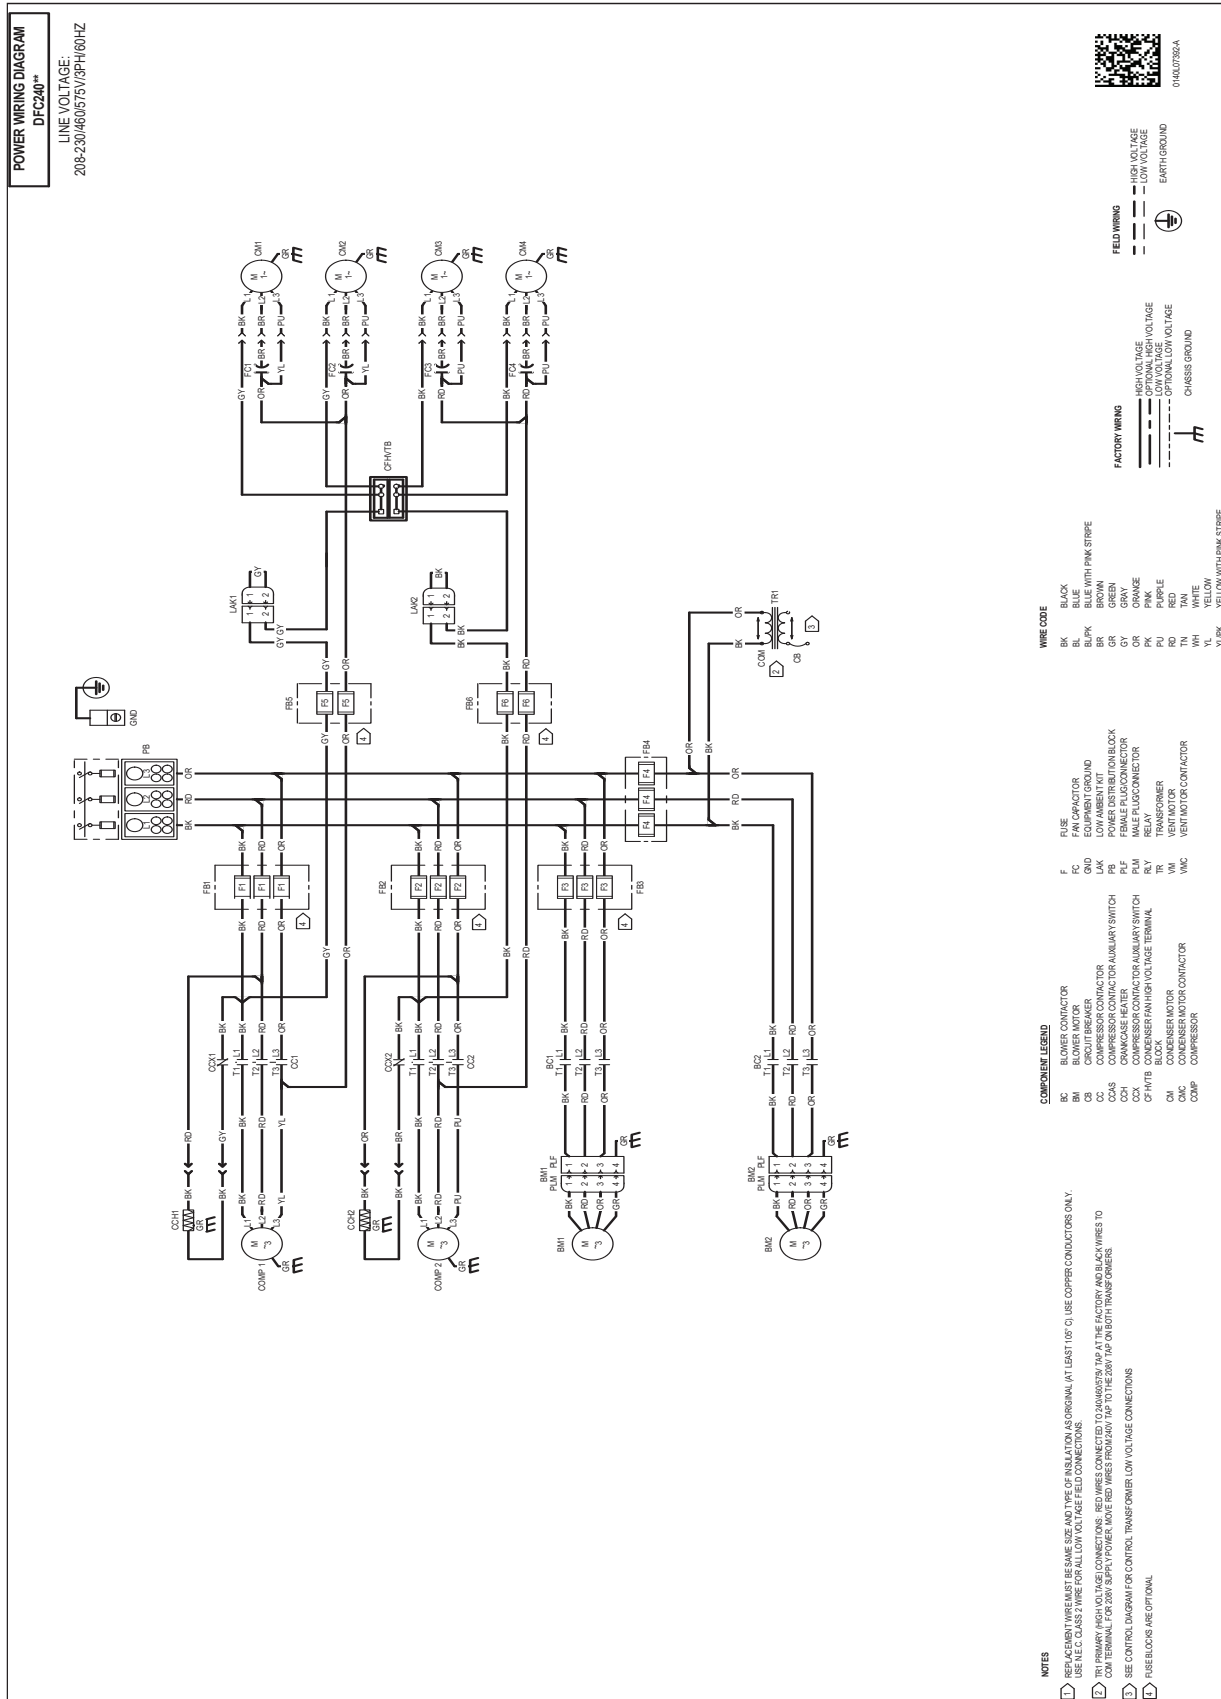


Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

**WARNING**

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.




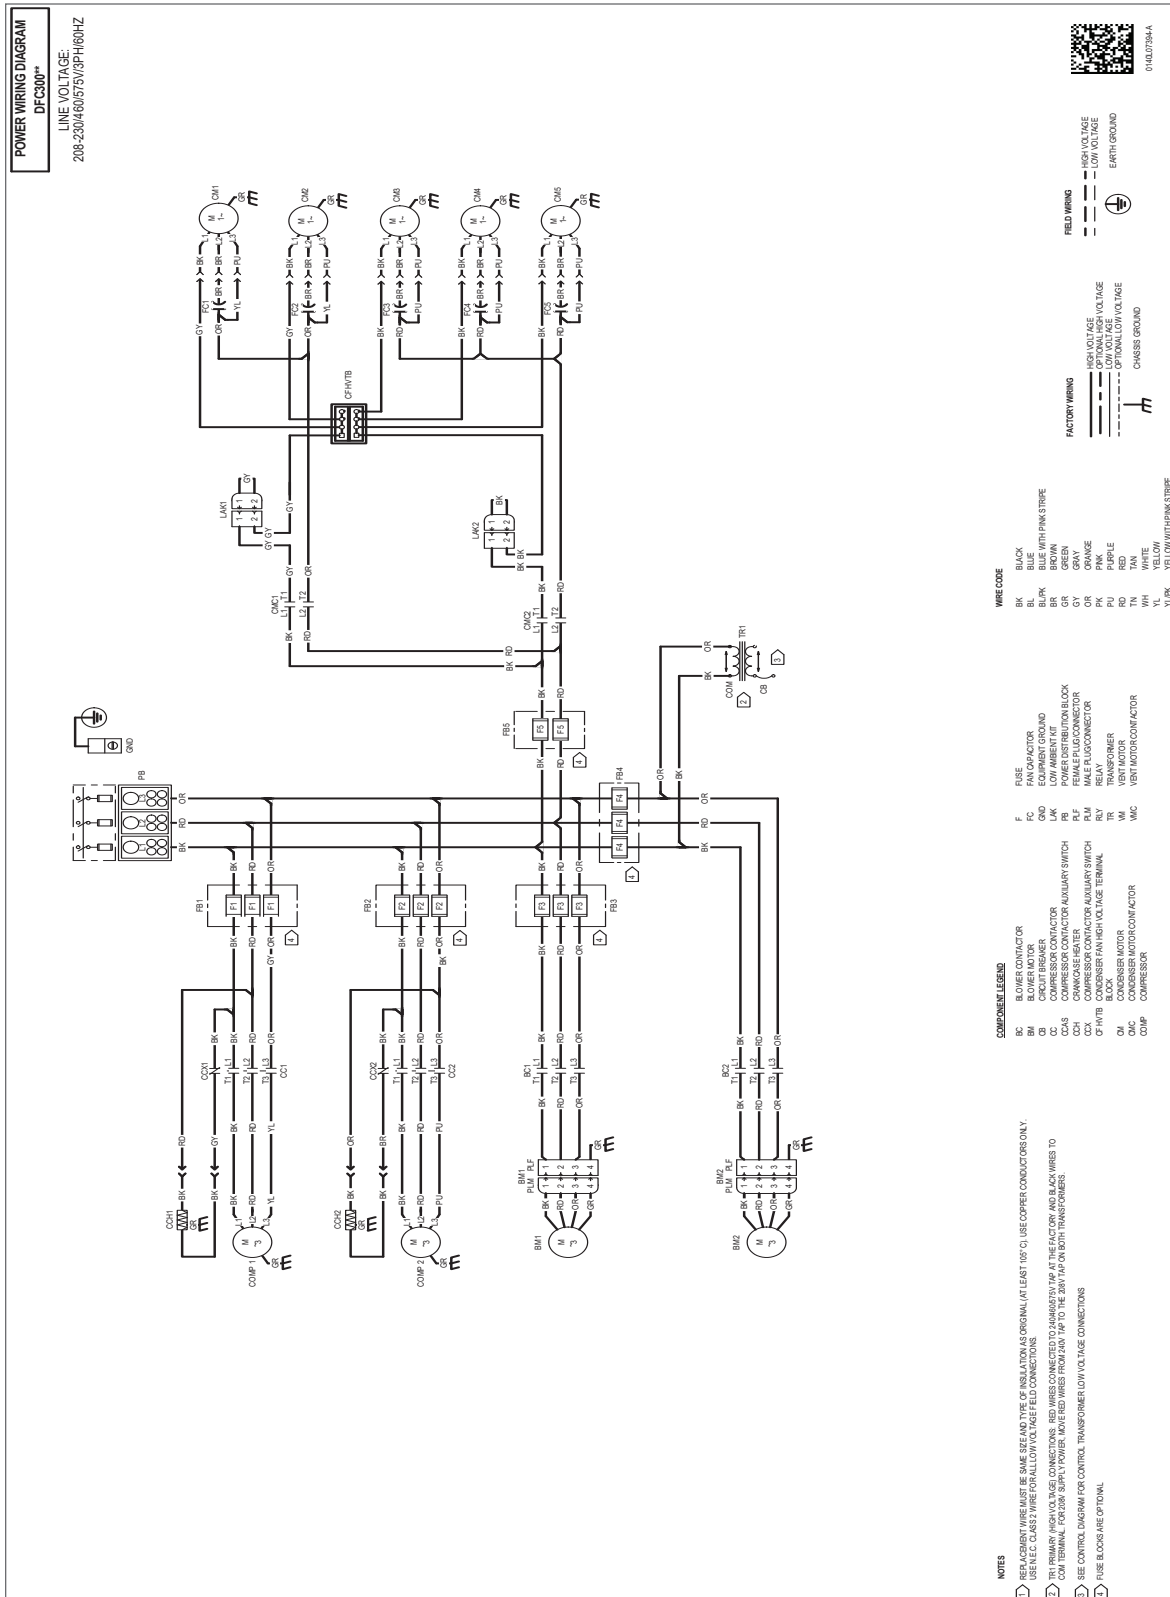

**WARNING**

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

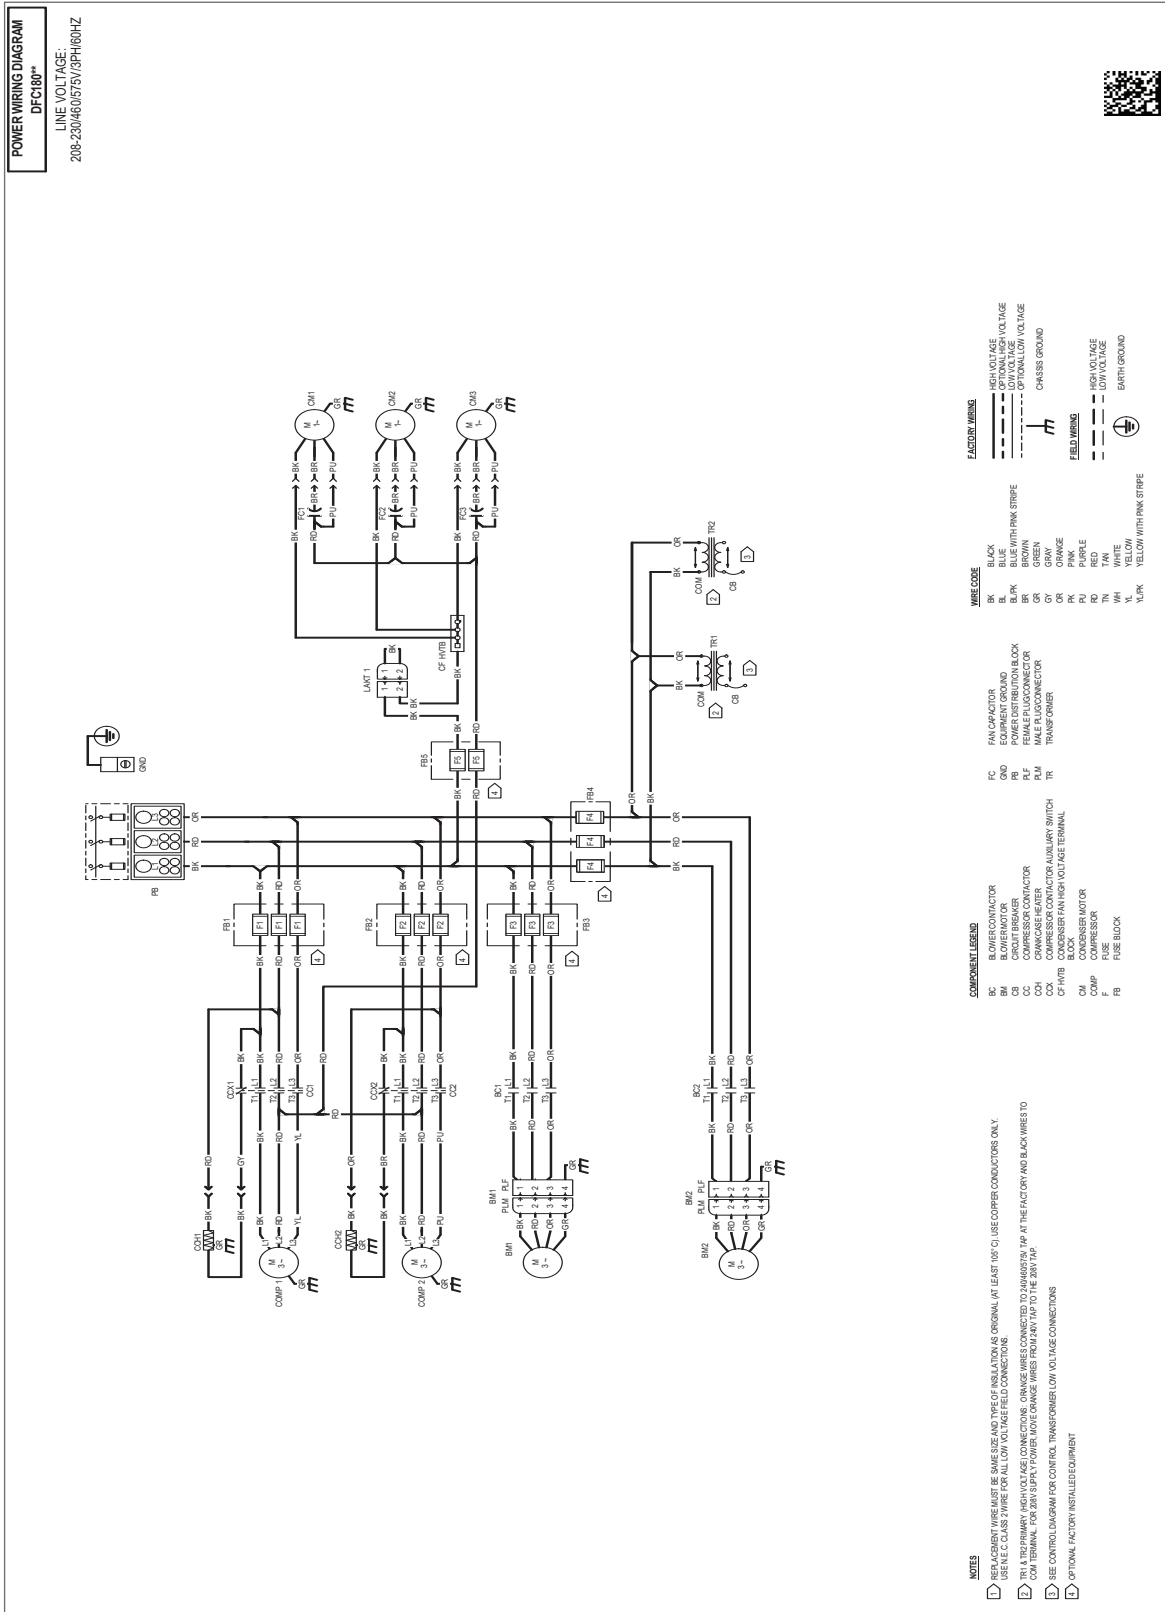


Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.


**WARNING**

**High Voltage:** Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.



Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

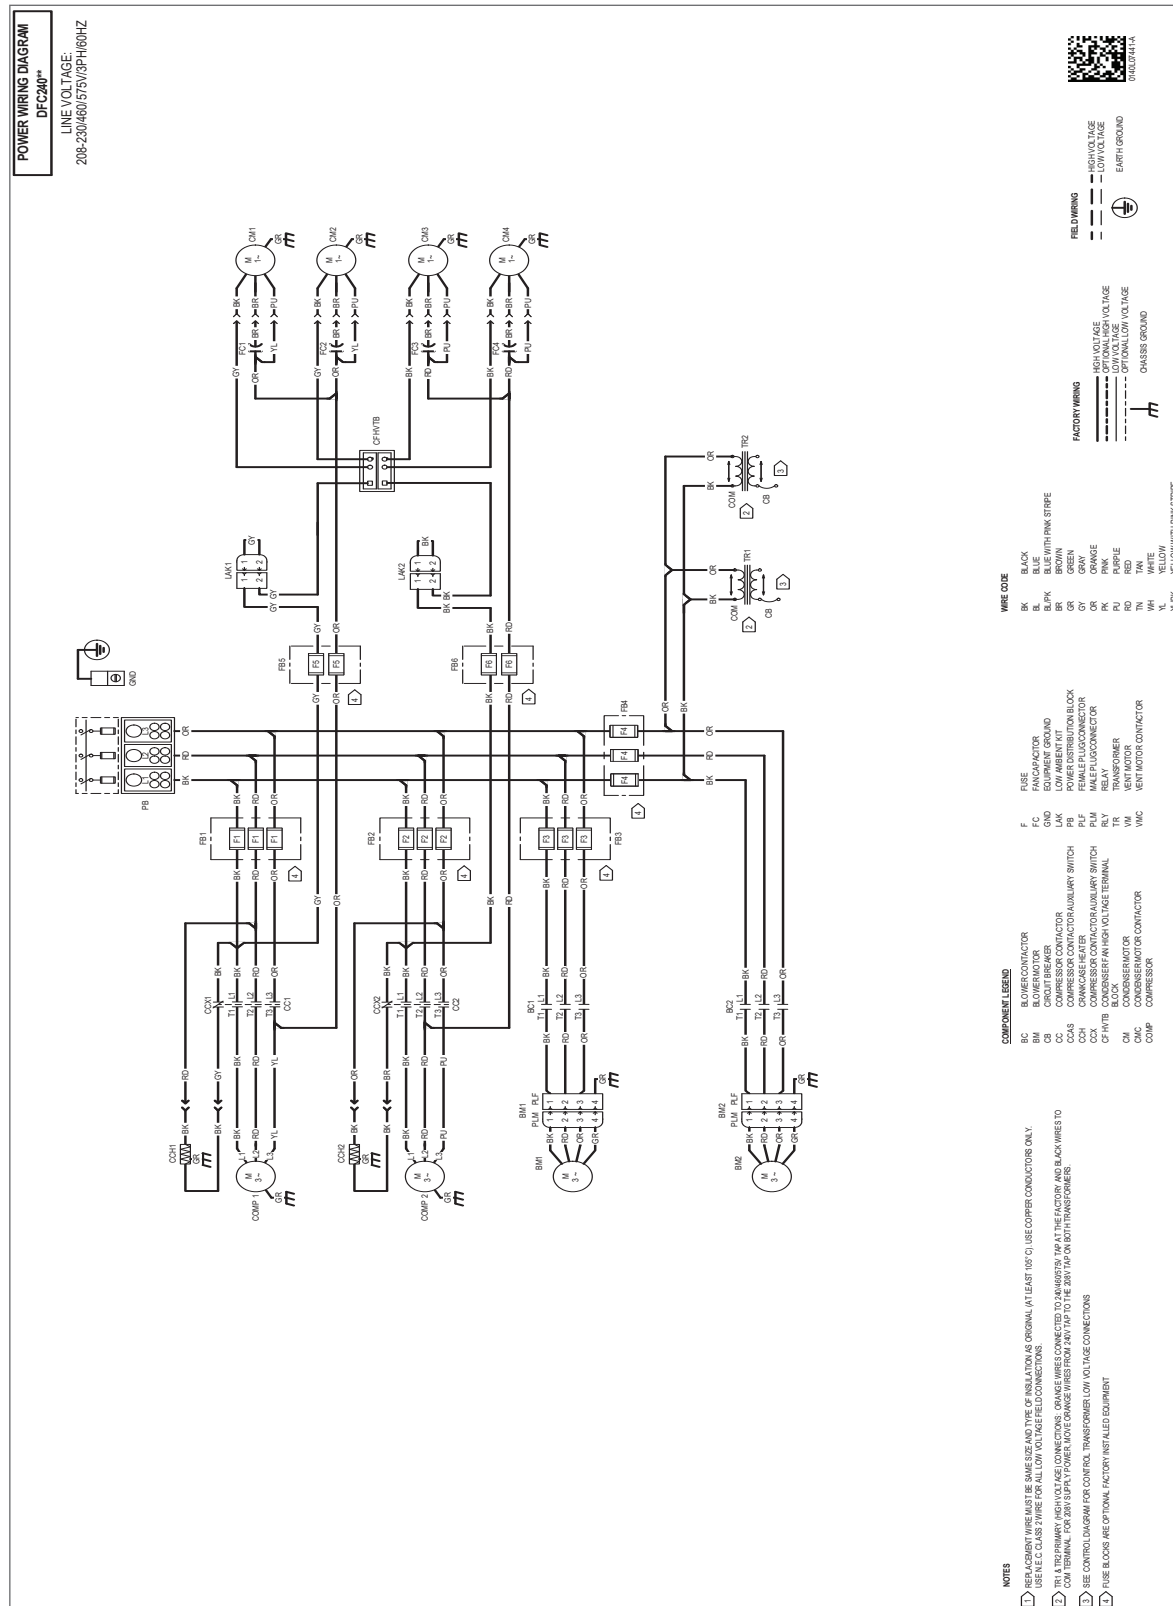


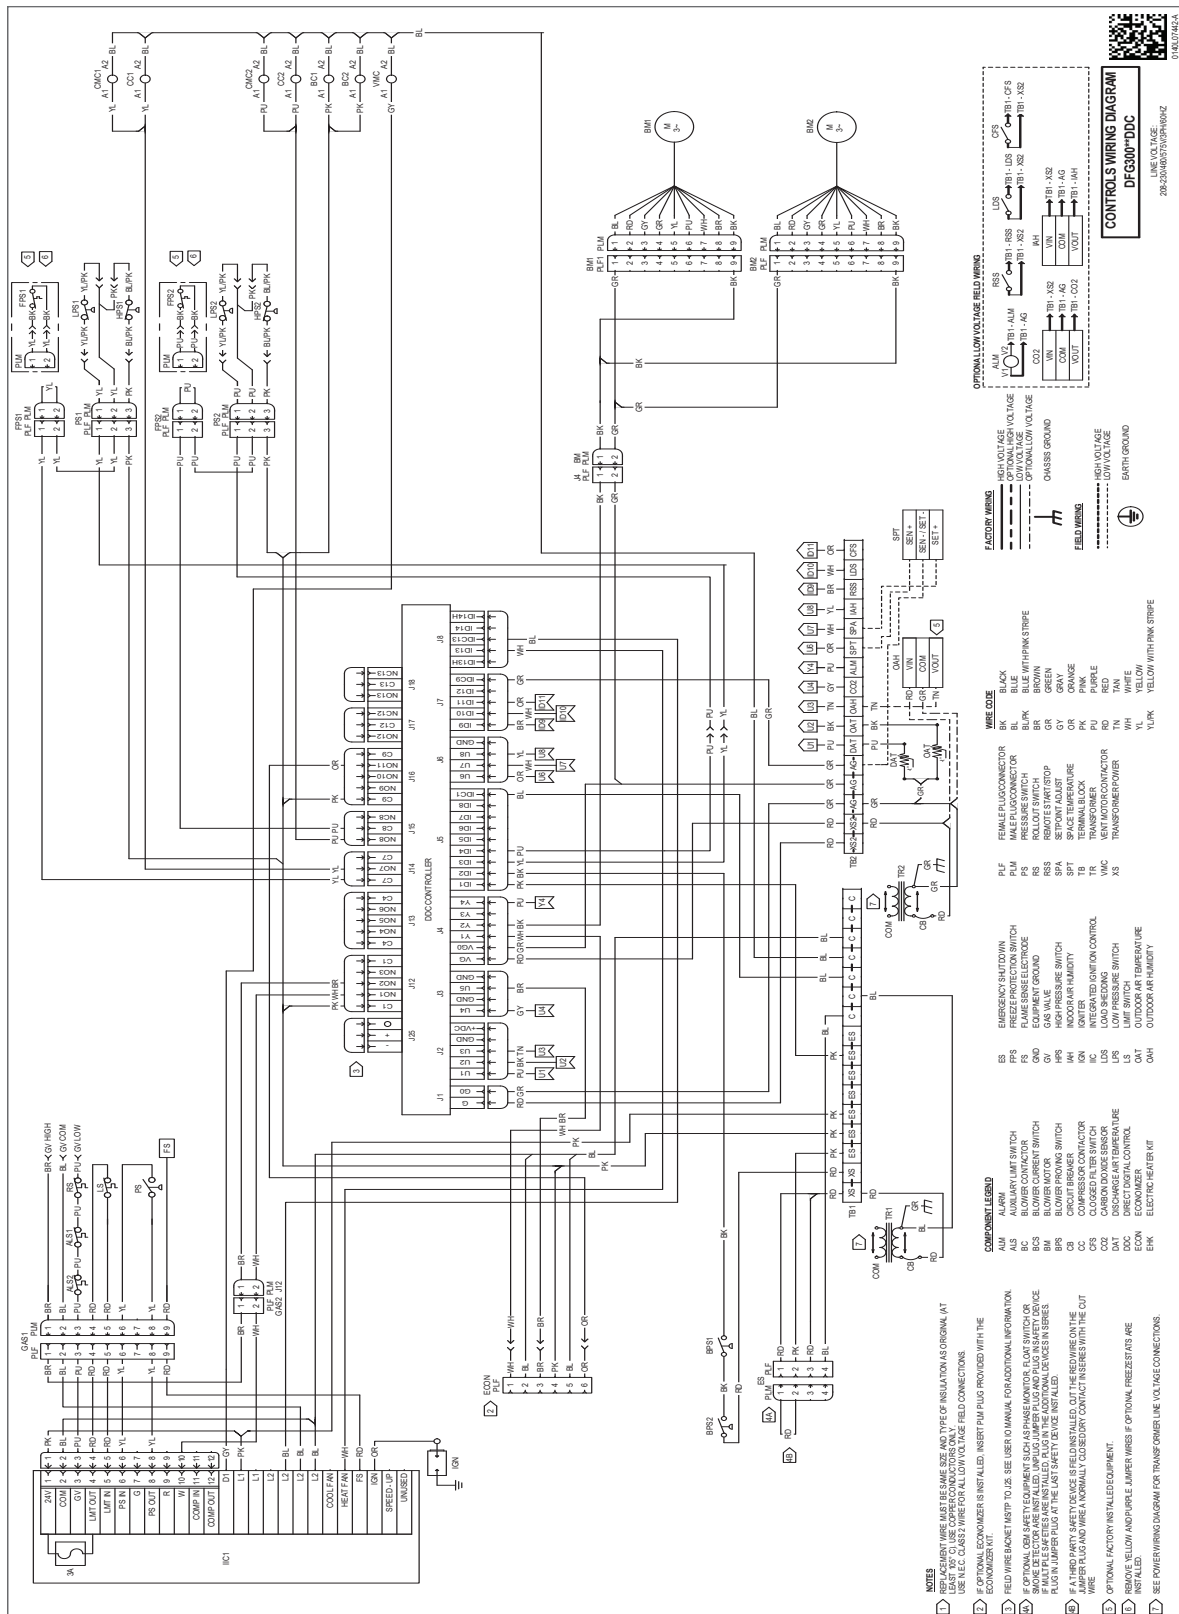

**WARNING**

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.


Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

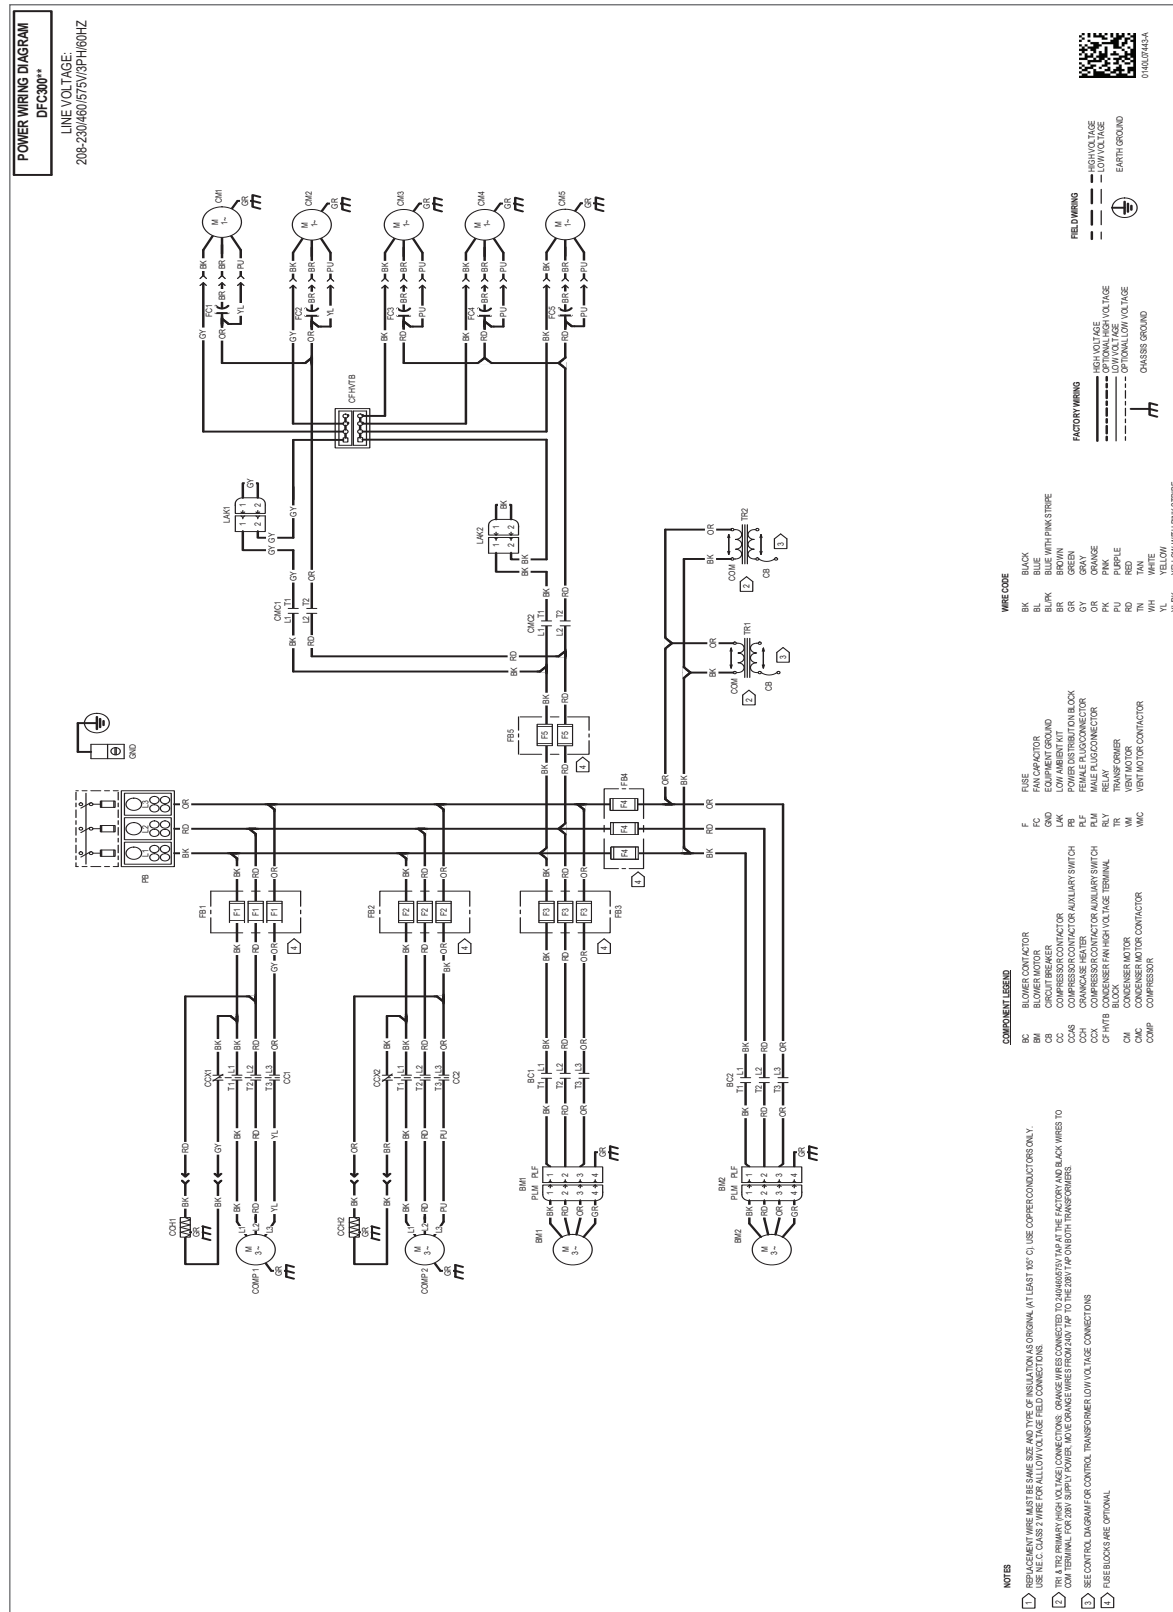

Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.




**WARNING**

**High Voltage:** Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

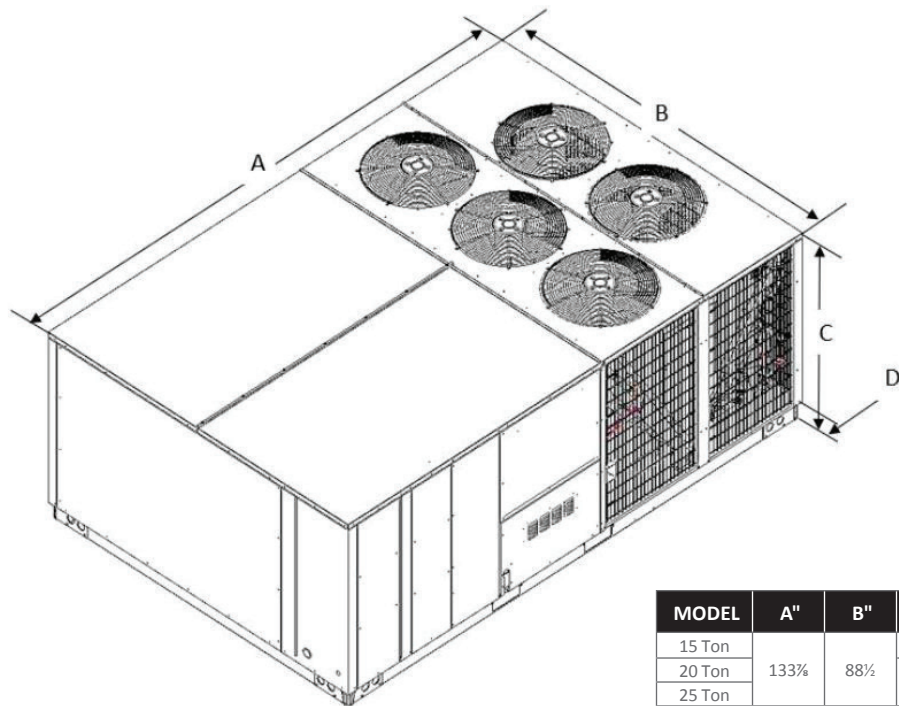


| MODEL  | A"                | B"               | C"                 | D"               |
|--------|-------------------|------------------|--------------------|------------------|
| 15 Ton | 133 $\frac{3}{8}$ | 88 $\frac{1}{2}$ | 51 $\frac{11}{16}$ | 5 $\frac{5}{32}$ |
| 20 Ton |                   |                  | 51                 |                  |
| 25 Ton |                   |                  | 51                 |                  |

**NOTE:** 15 ton has 3 fans; 20 ton has 4 fans; 25 ton has 5 fans

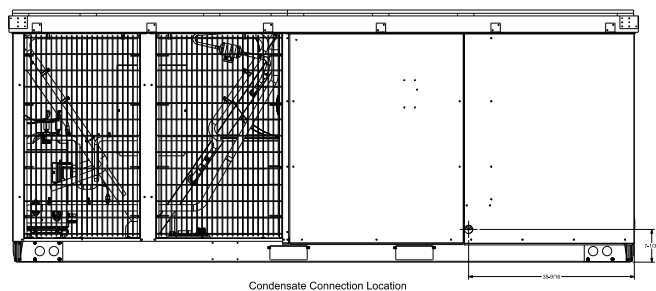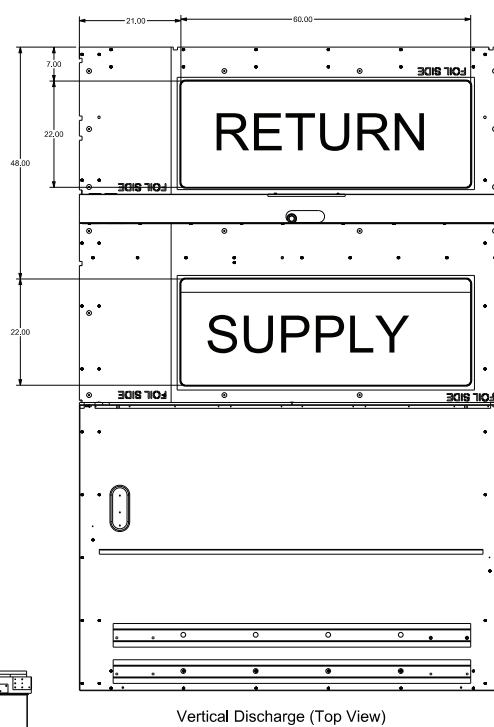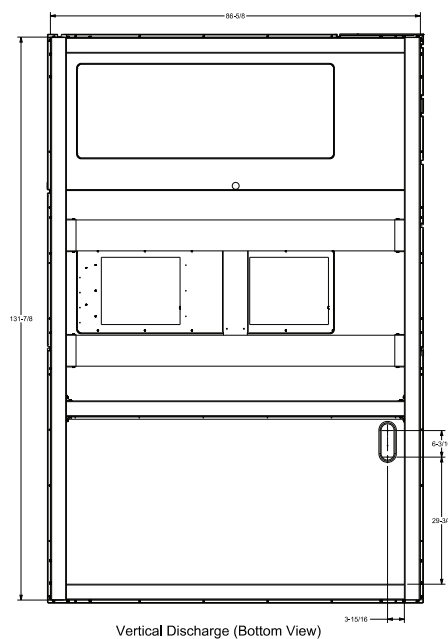


### Electrical Entrance Locations

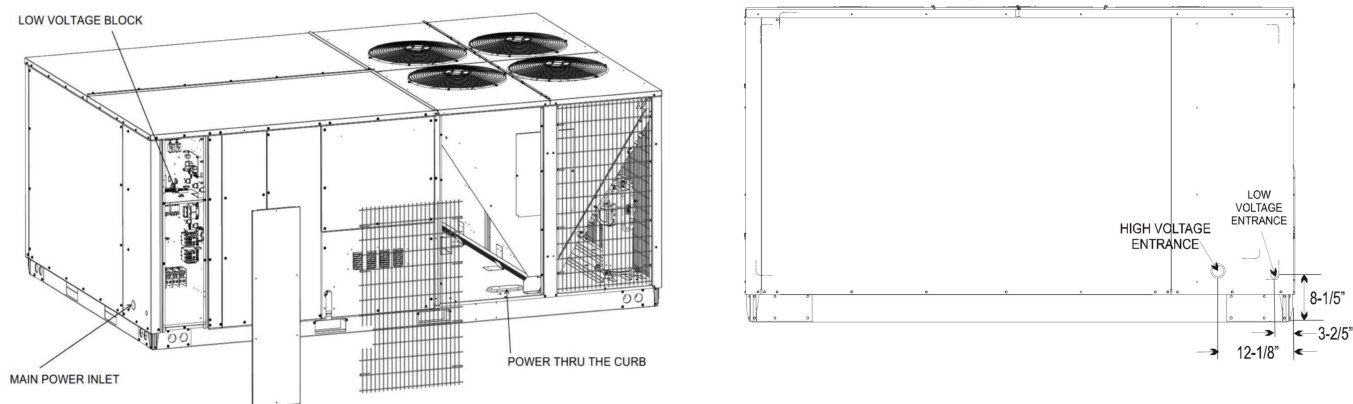

### Service Clearance

Allow for recommended service clearances as shown in the image below. In situations that have multiple units, a 36" minimum clearance is required between the condenser coils. A clearance of 48" is recommended on all sides of the unit to allow service access and to ensure proper ventilation and condenser airflow. The top of the unit should be unobstructed. Provide a roof walkway along the sides of the unit for service and access to controls and components. Contact your Daikin sales representative for service requirements less than those recommended.

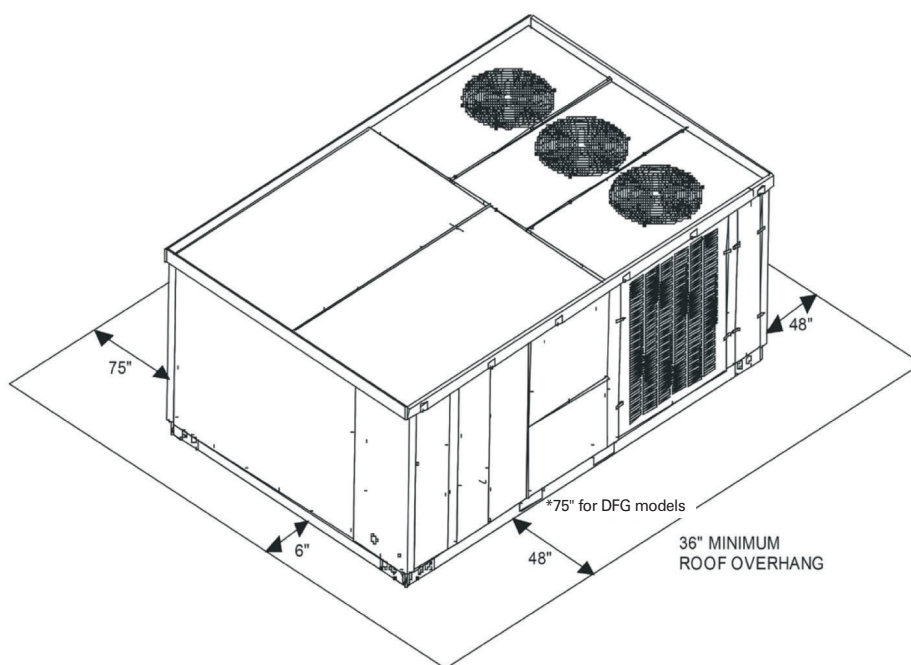

## Unit Location

The structural engineer must verify that the roof has adequate support and ability to minimize deflection. Take extreme caution when using on a wooden roof structure. Unit condenser coils should be in a location that avoids any heated exhaust air.



Allow sufficient space around the unit for maintenance/service clearance. Consult your Daikin sales representative if available clearances do not meet minimum recommendations.

Where code considerations, such as the NEC, require extended clearances, these take precedence.

Provisions for forks have been included in the unit base frame. No other fork locations are approved.

- » Unit must be lifted by the four lifting holes located at the base frame corners.
- » Lifting cables should be attached to the unit with shackles.
- » The distance between the crane hook and the top of the unit must not be less than 60".
- » Two spreader bars must span over the unit to prevent damage to the cabinet by the lift cables. Spreader bars must be of sufficient length so that cables do not come in contact with the unit during transport. Remove wood struts mounted beneath unit base frame before setting unit on roof curb. These struts are intended to protect unit base frame from forklift damage. To remove the struts, extract the sheet metal retainers and pull the struts through the base of the unit. Refer to rigging label on the unit.

**Important:** If using bottom discharge with roof curb, duct-work should be attached to the curb prior to installing the unit. Refer to the Roof Curb Installation Instructions for proper curb installation. Curbing must be installed in compliance with the National Roofing Contractors Association Manual. Lower unit carefully onto roof mounting curb. While rigging the unit, the center of gravity will cause the condenser end to be lower than the supply air end. Bring condenser end of unit into alignment with the curb. With condenser end of the unit resting on curb member and using curb as a fulcrum, lower opposite end of the unit until entire unit is seated on the curb. When a rectangular cantilever curb is used, take care to center the unit. Check for proper alignment and orientation of supply and return openings with duct. For further and more detailed information please refer to our Daikin Light Commercial Packaged unit IOD.

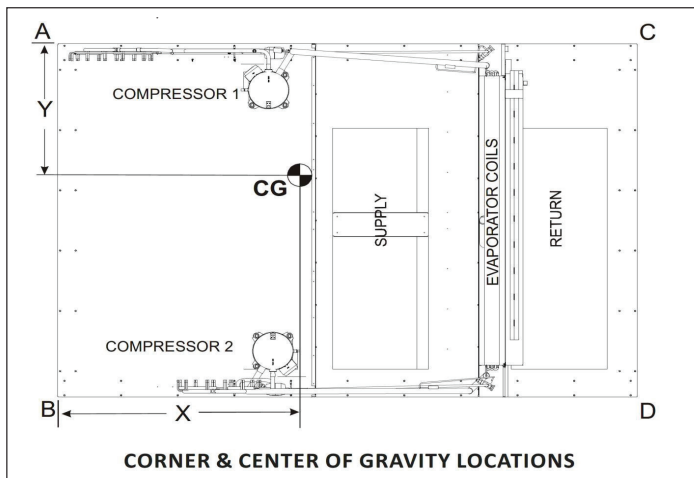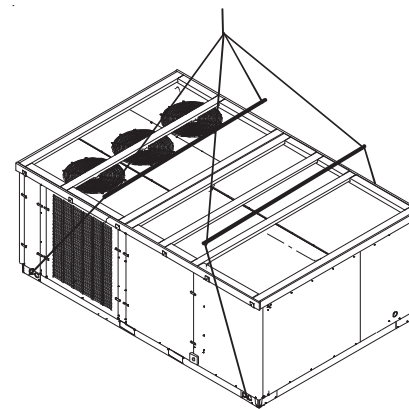

## Roof Curb Installation

The roof curb is field-assembled and must be installed level (within 1/16" per foot side to side). A sub-base must be constructed by the contractor in applications involving pitched roofs. Gaskets are furnished and must be installed between the unit and curb. For proper installation, follow NRCA guidelines. In applications requiring post and rail installation, an I-beam securely mounted on multiple posts should support the unit on each side. In addition, the insulation on the underside of the unit should be protected from the elements. Applications in geographic areas subjected to seismic or hurricane conditions must meet code requirements for fastening the unit to the curb and the curb to the building structure.

## Weights

| MODEL           | SHIPPING WEIGHT (LBS) | OPERATING WEIGHT (LBS) | CORNER WEIGHTS (LBS) |     |     |     | LENGTH<br>X (in)               | WIDTH<br>Y (in)                |
|-----------------|-----------------------|------------------------|----------------------|-----|-----|-----|--------------------------------|--------------------------------|
|                 |                       |                        | A                    | B   | C   | D   |                                |                                |
| DFC1803D000001S | 1839                  | 1724                   | 486                  | 410 | 395 | 433 | 69 <sup>2</sup> / <sub>3</sub> | 43                             |
| DFC1804D000001S | 1839                  | 1724                   | 486                  | 410 | 395 | 433 | 69 <sup>2</sup> / <sub>3</sub> | 43                             |
| DFC1807D000001S | 1839                  | 1724                   | 486                  | 410 | 395 | 433 | 69 <sup>2</sup> / <sub>3</sub> | 43                             |
| DFC2403D000001S | 2108                  | 1993                   | 580                  | 380 | 437 | 596 | 64 <sup>2</sup> / <sub>9</sub> | 43 <sup>2</sup> / <sub>7</sub> |
| DFC2404D000001S | 2108                  | 1993                   | 580                  | 380 | 437 | 596 | 64 <sup>2</sup> / <sub>9</sub> | 43 <sup>2</sup> / <sub>7</sub> |
| DFC2407D000001S | 2108                  | 1993                   | 580                  | 380 | 437 | 596 | 64 <sup>2</sup> / <sub>9</sub> | 43 <sup>2</sup> / <sub>7</sub> |
| DFC3003D000001S | 2198                  | 2083                   | 446                  | 499 | 621 | 517 | 60 <sup>1</sup> / <sub>2</sub> | 43                             |
| DFC3004D000001S | 2198                  | 2083                   | 446                  | 499 | 621 | 517 | 60 <sup>1</sup> / <sub>2</sub> | 43                             |
| DFC3007D000001S | 2198                  | 2083                   | 446                  | 499 | 621 | 517 | 60 <sup>1</sup> / <sub>2</sub> | 43                             |

For details on accessories refer to document **PM-LC-ACCESSORIES**