


Up to 14.5 SEER2
1½ TO 5 TONS

ENERGY-EFFICIENT
SPLIT SYSTEM AIR CONDITIONER

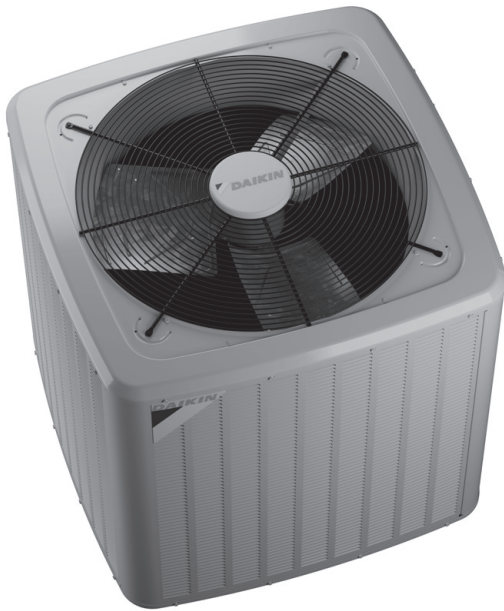

■ Contents

| | |
|------------------------------|----|
| Nomenclature..... | 2 |
| Product Specifications..... | 3 |
| Expanded Cooling Data..... | 4 |
| Performance Data..... | 18 |
| AHRI Ratings (see note)..... | 20 |
| Wiring Diagram..... | 21 |
| Dimensions..... | 22 |
| Accessories..... | 22 |

■ Standard Features


- Energy-efficient compressor
- Copper tube/ enhanced aluminum fin coil- 5mm diameter
- Single-Speed PSC condenser fan motor
- Factory-installed filter drier
- Sweat connection service valves with easy access to gauge ports
- Contactor with lug connection
- AHRI Certified; ETL Listed

■ Cabinet Features

- Removable grille-style top design compliant with UL 60335-2-40
- Venturi for increased velocity of airflow
- Custom Nickel Gray powder-paint finish 500-hour salt-spray tested
- Wire fan discharge grille
- Steel louver coil guard
- Rust-resistant coated screws
- Top and side maintenance access
- Single-panel access to controls with space provided for field-installed accessories



* Complete warranty details available from your local dealer or at www.daikincomfort.com. To receive the 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Additional requirements for annual maintenance are required for the Unit Replacement Limited Warranty. Online registration and some of the additional requirements are not required in California or Québec. The duration of warranty coverages in Texas differs in some cases.

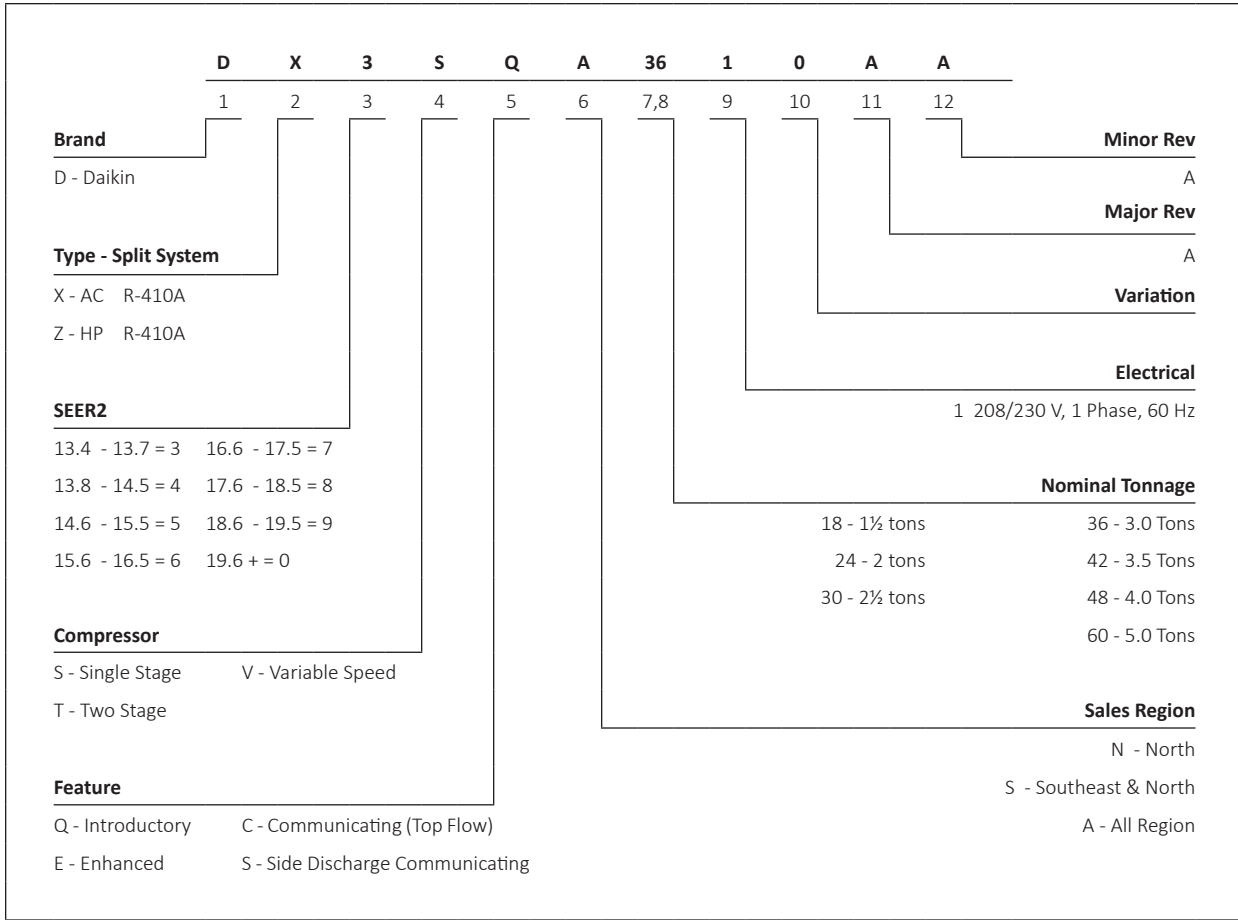

| | DX3SQ N1810A* | DX3SQ N2410A* | DX3SQ N3010A* | DX3SQ N3610A* | DX3SQ N4210A* | DX3SQ N4810A* | DX3SQ N6010A* |
|---|------------------|------------------|------------------|------------------|------------------|------------------|------------------|
| COOLING CAPACITY | | | | | | | |
| Nominal Cooling (BTU/h) | 18,000 | 24,000 | 30,000 | 36,000 | 42,000 | 48,000 | 60,000 |
| Decibels (dBA) | 73.0 | 73.0 | 76.0 | 71.0 | 70.0 | 74.0 | 74.0 |
| COMPRESSOR | | | | | | | |
| RLA | 6.1 | 8.4 | 12.1 | 14.1 | 17.7 | 18.5 | 25.6 |
| LRA | 35.1 | 41.2 | 55 | 87.4 | 110.2 | 124 | 150 |
| Stage | Single | Single | Single | Single | Single | Single | Single |
| Type | Rotary | Rotary | Rotary | Scroll | Scroll | Scroll | Scroll |
| CONDENSER FAN MOTOR | | | | | | | |
| Motor Type | PSC | PSC | PSC | PSC | PSC | PSC | PSC |
| Horsepower (RPM) | 1/8 | 1/8 | 1/6 | 1/6 | 1/6 | 1/4 | 1/4 |
| FLA | 0.70 | 0.70 | 0.95 | 0.95 | 0.95 | 1.30 | 1.30 |
| REFRIGERATION SYSTEM | | | | | | | |
| Refrigerant Line Size ¹ | | | | | | | |
| Liquid Line Size ("O.D.) | 3/8" | 3/8" | 3/8" | 3/8" | 3/8" | 3/8" | 3/8" |
| Suction Line Size ("O.D.) | 3/4" | 3/4" | 3/4" | 7/8" | 1 1/8" | 1 1/8" | 1 1/8" |
| Refrigerant Connection Size | | | | | | | |
| Liquid Valve Size ("O.D.) | 3/8" | 3/8" | 3/8" | 3/8" | 3/8" | 3/8" | 3/8" |
| Suction Valve Size ("O.D.) ^{2,3} | 3/4" | 3/4" | 3/4" | 3/4" | 7/8" | 7/8" | 7/8" |
| Valve Connection Type | Sweat | Sweat | Sweat | Sweat | Sweat | Sweat | Sweat |
| Refrigerant Charge ⁴ | 65 | 71 | 78 | 71 | 115 | 120 | 130 |
| ELECTRICAL DATA | | | | | | | |
| Voltage-Phase | 208/230-1 | 208/230-1 | 208/230-1 | 208/230-1 | 208/230-1 | 208/230-1 | 208/230-1 |
| Minimum Circuit Ampacity ⁵ | 8.3 | 11.2 | 16.1 | 18.6 | 23.1 | 24.4 | 33.3 |
| Max. Overcurrent Protection ⁶ | 15 | 15 | 25 | 30 | 40 | 40 | 50 |
| Min / Max Volts | 197/253 | 197/253 | 197/253 | 197/253 | 197/253 | 197/253 | 197/253 |
| Electrical Conduit Size | 1/2" or 3/4" | 1/2" or 3/4" | 1/2" or 3/4" | 1/2" or 3/4" | 1/2" or 3/4" | 1/2" or 3/4" | 1/2" or 3/4" |
| Equipment Weight (lbs) | 117 | 125 | 128 | 153 | 188 | 215 | 227 |
| Ship Weight (lbs) | 130 | 138 | 143 | 168 | 203 | 235 | 247 |

¹ Line sizes denoted for 25' line sets, tested and rated in accordance with ARI Standard 210/240. For other line set lengths or sizes, refer to the Installation Instructions and/or the Long Line Set Applications guide.

² Installer will need to supply 3/4" to 3/8" adapters for suction line connections.

³ Installer will need to supply 7/8" to 1 1/8" adapters for suction line connections.

⁴ Unit is factory charged with refrigerant for 15' of 3/8" liquid line. System charge must be adjusted per the Final Charge Adjustment procedure found in the Installation Instructions.

⁵ Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes

⁶ Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

NOTES

- Always check the S&R plate for electrical data on the unit being installed.

| IDB | | OUTDOOR AMBIENT TEMPERATURE | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------|------------|-----------------------------|------|-------|-------|-------|------|-------|-------|-------|------|-------|-------|-------|------|-------|-------|-------|------|-------|-------|-------|------|-------|-------|-------|-----|
| | | 65 | | | | 75 | | | | 85 | | | | 95 | | | | 105 | | | | 115 | | | | | |
| | | AIRFLOW | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | |
| 70 | 520 | MBh | 17.5 | 17.8 | 18.3 | - | 17.4 | 17.6 | 18.1 | - | 16.9 | 17.2 | 17.7 | - | 16.1 | 16.4 | 16.9 | - | 15.2 | 15.4 | 16.0 | - | 14.3 | 14.6 | 15.1 | - | |
| | | S/T | 0.61 | 0.54 | 0.41 | - | 0.61 | 0.54 | 0.42 | - | 0.64 | 0.57 | 0.44 | - | 0.65 | 0.58 | 0.46 | - | 1.00 | 0.60 | 0.48 | - | 1.00 | 0.65 | 0.53 | - | |
| | | ΔT | 19 | 18 | 14 | - | 19 | 17 | 14 | - | 20 | 18 | 14 | - | 19 | 17 | 14 | - | 19 | 17 | 14 | - | 20 | 18 | 15 | - | |
| | | kW | 1.12 | 1.12 | 1.12 | - | 1.25 | 1.24 | 1.24 | - | 1.38 | 1.38 | 1.38 | - | 1.53 | 1.53 | 1.53 | - | 1.70 | 1.70 | 1.70 | - | 1.89 | 1.89 | 1.89 | - | |
| | | Amps | 4.1 | 4.1 | 4.1 | - | 4.7 | 4.6 | 4.6 | - | 5.3 | 5.3 | 5.3 | - | 6.0 | 6.0 | 5.9 | - | 6.7 | 6.7 | 6.7 | - | 7.6 | 7.6 | 7.6 | - | |
| | | Hi PR | 235 | 236 | 238 | - | 272 | 273 | 275 | - | 311 | 312 | 313 | - | 352 | 353 | 355 | - | 397 | 398 | 400 | - | 445 | 446 | 447 | - | |
| | Lo PR | 121 | 122 | 125 | - | 128 | 129 | 132 | - | 134 | 136 | 139 | - | 140 | 141 | 144 | - | 145 | 146 | 149 | - | 151 | 153 | 156 | - | | |
| | 600 | MBh | 17.9 | 18.1 | 18.6 | - | 17.7 | 18.0 | 18.5 | - | 17.3 | 17.5 | 18.0 | - | 16.5 | 16.7 | 17.2 | - | 15.5 | 15.8 | 16.3 | - | 14.7 | 14.9 | 15.4 | - | |
| | | S/T | 0.64 | 0.57 | 0.45 | - | 0.65 | 0.58 | 0.46 | - | 0.67 | 0.60 | 0.48 | - | 0.69 | 0.62 | 0.50 | - | 1.00 | 0.64 | 0.52 | - | 1.00 | 0.69 | 0.56 | - | |
| | | ΔT | 18 | 16 | 13 | - | 18 | 16 | 13 | - | 18 | 17 | 13 | - | 18 | 16 | 13 | - | 18 | 16 | 12 | - | 19 | 17 | 14 | - | |
| | | kW | 1.13 | 1.13 | 1.13 | - | 1.25 | 1.25 | 1.25 | - | 1.39 | 1.39 | 1.39 | - | 1.54 | 1.54 | 1.54 | - | 1.71 | 1.70 | 1.70 | - | 1.90 | 1.90 | 1.90 | - | |
| | | Amps | 4.1 | 4.1 | 4.1 | - | 4.7 | 4.7 | 4.7 | - | 5.3 | 5.3 | 5.3 | - | 6.0 | 6.0 | 6.0 | - | 6.8 | 6.7 | 6.7 | - | 7.6 | 7.6 | 7.6 | - | |
| Hi PR | | 238 | 239 | 240 | - | 274 | 275 | 277 | - | 313 | 314 | 316 | - | 355 | 356 | 357 | - | 399 | 400 | 402 | - | 447 | 448 | 450 | - | | |
| Lo PR | 123 | 125 | 128 | - | 130 | 132 | 135 | - | 137 | 138 | 141 | - | 142 | 143 | 146 | - | 147 | 149 | 152 | - | 154 | 155 | 158 | - | | | |
| 675 | MBh | 18.3 | 18.5 | 19.0 | - | 18.1 | 18.4 | 18.9 | - | 17.7 | 17.9 | 18.4 | - | 16.9 | 17.1 | 17.6 | - | 15.9 | 16.2 | 16.7 | - | 15.1 | 15.3 | 15.8 | - | | |
| | S/T | 0.65 | 0.58 | 0.45 | - | 0.65 | 0.58 | 0.46 | - | 0.68 | 0.61 | 0.48 | - | 1.00 | 0.62 | 0.50 | - | 1.00 | 0.64 | 0.52 | - | 1.00 | 0.69 | 0.57 | - | | |
| | ΔT | 17 | 15 | 12 | - | 17 | 15 | 12 | - | 17 | 16 | 12 | - | 17 | 15 | 12 | - | 17 | 15 | 11 | - | 18 | 16 | 13 | - | | |
| | kW | 1.13 | 1.13 | 1.13 | - | 1.26 | 1.26 | 1.25 | - | 1.40 | 1.39 | 1.39 | - | 1.54 | 1.54 | 1.54 | - | 1.71 | 1.71 | 1.71 | - | 1.91 | 1.90 | 1.90 | - | | |
| | Amps | 4.1 | 4.1 | 4.1 | - | 4.7 | 4.7 | 4.7 | - | 5.3 | 5.3 | 5.3 | - | 6.0 | 6.0 | 6.0 | - | 6.8 | 6.8 | 6.8 | - | 7.7 | 7.7 | 7.7 | - | | |
| | Hi PR | 240 | 241 | 243 | - | 277 | 278 | 279 | - | 315 | 316 | 318 | - | 357 | 358 | 360 | - | 402 | 403 | 404 | - | 449 | 450 | 452 | - | | |
| Lo PR | 126 | 127 | 130 | - | 133 | 134 | 137 | - | 139 | 141 | 144 | - | 145 | 146 | 149 | - | 150 | 151 | 154 | - | 156 | 158 | 161 | - | | | |
| 75 | 520 | MBh | 17.5 | 17.8 | 18.3 | 19.1 | 17.4 | 17.6 | 18.1 | 18.9 | 16.9 | 17.2 | 17.7 | 18.5 | 16.1 | 16.4 | 16.9 | 17.7 | 15.2 | 15.4 | 16.0 | 16.7 | 14.3 | 14.6 | 15.1 | 15.9 | |
| | | S/T | 0.73 | 0.66 | 0.53 | 0.4 | 0.73 | 0.66 | 0.54 | 0.4 | 0.73 | 0.68 | 0.56 | 0.4 | 1.00 | 0.70 | 0.58 | 0.4 | 1.00 | 0.72 | 0.60 | 0.5 | 1.00 | 0.77 | 0.65 | 0.5 | |
| | | ΔT | 24 | 22 | 18 | 14 | 24 | 22 | 18 | 14 | 24 | 22 | 18 | 15 | 24 | 22 | 18 | 14 | 23 | 21 | 18 | 14 | 24 | 23 | 19 | 15 | |
| | | kW | 1.12 | 1.12 | 1.12 | 1.1 | 1.24 | 1.24 | 1.24 | 1.3 | 1.38 | 1.38 | 1.38 | 1.4 | 1.53 | 1.53 | 1.53 | 1.5 | 1.54 | 1.70 | 1.70 | 1.70 | 1.69 | 1.7 | 1.89 | 1.89 | 1.9 |
| | | Amps | 4.1 | 4.1 | 4.1 | 4.1 | 4.6 | 4.6 | 4.6 | 4.7 | 5.3 | 5.3 | 5.3 | 5.3 | 6.0 | 6.0 | 5.9 | 6.0 | 6.0 | 6.7 | 6.7 | 6.7 | 6.7 | 7.6 | 7.6 | 7.6 | 7.6 |
| | | Hi PR | 235 | 236 | 238 | 242.2 | 272 | 273 | 275 | 279.0 | 311 | 312 | 314 | 317.6 | 352 | 353 | 355 | 359.1 | 397 | 398 | 400 | 403.9 | 445 | 446 | 448 | 451.7 | |
| | Lo PR | 121 | 122 | 125 | 130.2 | 128 | 129 | 132 | 137.4 | 134 | 136 | 139 | 143.8 | 140 | 141 | 144 | 149.1 | 145 | 146 | 149 | 154.4 | 151 | 153 | 156 | 161.0 | | |
| | 600 | MBh | 17.9 | 18.1 | 18.6 | 19.4 | 17.7 | 18.0 | 18.5 | 19.3 | 17.3 | 17.5 | 18.0 | 18.8 | 16.5 | 16.7 | 17.3 | 18.0 | 15.5 | 15.8 | 16.3 | 17.1 | 14.7 | 14.9 | 15.4 | 16.2 | |
| | | S/T | 0.76 | 0.69 | 0.57 | 0.4 | 0.77 | 0.70 | 0.57 | 0.4 | 1.00 | 0.72 | 0.60 | 0.5 | 1.00 | 0.74 | 0.61 | 0.5 | 1.00 | 0.76 | 0.63 | 0.5 | 1.00 | 1.00 | 0.68 | 0.6 | |
| | | ΔT | 22 | 21 | 17 | 13 | 22 | 20 | 17 | 13 | 23 | 21 | 17 | 13 | 22 | 20 | 17 | 13 | 22 | 20 | 17 | 13 | 23 | 21 | 18 | 14 | |
| | | kW | 1.13 | 1.13 | 1.13 | 1.13 | 1.25 | 1.25 | 1.25 | 1.26 | 1.39 | 1.39 | 1.39 | 1.40 | 1.54 | 1.54 | 1.53 | 1.54 | 1.70 | 1.70 | 1.70 | 1.71 | 1.71 | 1.90 | 1.90 | 1.90 | |
| | | Amps | 4.1 | 4.1 | 4.1 | 4.1 | 4.7 | 4.7 | 4.7 | 4.7 | 5.3 | 5.3 | 5.3 | 5.3 | 6.0 | 6.0 | 6.0 | 6.0 | 6.8 | 6.7 | 6.7 | 6.8 | 7.6 | 7.6 | 7.6 | 7.7 | |
| Hi PR | | 238 | 239 | 240 | 244.6 | 275 | 276 | 277 | 281.4 | 313 | 314 | 316 | 319.9 | 355 | 356 | 357 | 361.5 | 400 | 401 | 402 | 406.2 | 447 | 448 | 450 | 454.0 | | |
| Lo PR | 123 | 125 | 128 | 132.6 | 130 | 132 | 135 | 139.9 | 137 | 138 | 141 | 146.2 | 142 | 143 | 146 | 151.5 | 147 | 149 | 152 | 156.8 | 154 | 155 | 158 | 163.4 | | | |
| 675 | MBh | 18.3 | 18.5 | 19.0 | 19.8 | 18.1 | 18.4 | 18.9 | 19.7 | 17.7 | 17.9 | 18.4 | 19.2 | 16.9 | 17.1 | 17.7 | 18.4 | 15.9 | 16.2 | 16.7 | 17.5 | 15.1 | 15.3 | 15.8 | 16.6 | | |
| | S/T | 0.77 | 0.70 | 0.57 | 0.4 | 0.77 | 0.70 | 0.58 | 0.4 | 1.00 | 0.72 | 0.60 | 0.5 | 1.00 | 0.74 | 0.62 | 0.5 | 1.00 | 0.76 | 0.64 | 0.5 | 1.00 | 1.00 | 0.69 | 0.6 | | |
| | ΔT | 21 | 20 | 16 | 12 | 21 | 19 | 16 | 12 | 22 | 20 | 16 | 13 | 21 | 19 | 16 | 12 | 21 | 19 | 16 | 12 | 22 | 20 | 17 | 13 | | |
| | kW | 1.13 | 1.13 | 1.13 | 1.1 | 1.26 | 1.26 | 1.25 | 1.3 | 1.39 | 1.39 | 1.39 | 1.4 | 1.54 | 1.54 | 1.54 | 1.5 | 1.71 | 1.71 | 1.71 | 1.71 | 1.7 | 1.90 | 1.90 | 1.9 | | |
| | Amps | 4.1 | 4.1 | 4.1 | 4.2 | 4.7 | 4.7 | 4.7 | 4.7 | 5.3 | 5.3 | 5.3 | 5.4 | 6.0 | 6.0 | 6.0 | 6.0 | 6.8 | 6.8 | 6.8 | 6.8 | 7.7 | 7.7 | 7.7 | 7.7 | | |
| | Hi PR | 240 | 241 | 243 | 246.9 | 277 | 278 | 280 | 283.7 | 316 | 317 | 318 | 322.3 | 357 | 358 | 360 | 363.8 | 402 | 403 | 404 | 408.6 | 450 | 451 | 452 | 456.3 | | |
| Lo PR | 126 | 127 | 130 | 135.3 | 133 | 134 | 137 | 142.5 | 139 | 141 | 144 | 148.8 | 145 | 146 | 149 | 154.2 | 150 | 151 | 154 | 159.5 | 156 | 158 | 161 | 166.0 | | | |

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects ACCA (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp. + fan)

| IDB | | OUTDOOR AMBIENT TEMPERATURE | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------|------------|-----------------------------|------|-------|-------|-------|------|-------|-------|-------|------|-------|-------|-------|------|-------|-------|-------|------|-------|-------|-------|------|-------|-------|-------|-------|
| | | 65 | | | | 75 | | | | 85 | | | | 95 | | | | 105 | | | | 115 | | | | | |
| | | AIRFLOW | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | |
| 80 | 520 | MBh | 17.6 | 17.9 | 18.4 | 19.2 | 17.5 | 17.7 | 18.2 | 19.0 | 17.0 | 17.3 | 17.8 | 18.6 | 16.2 | 16.5 | 17.0 | 17.8 | 15.3 | 15.5 | 16.1 | 16.8 | 14.4 | 14.7 | 15.2 | 16.0 | |
| | | S/T | 0.84 | 0.77 | 0.65 | 0.5 | 1.00 | 0.80 | 0.67 | 0.5 | 1.00 | 0.82 | 0.69 | 0.5 | 1.00 | 0.82 | 0.69 | 0.6 | 1.00 | 1.00 | 0.71 | 0.6 | 1.00 | 1.00 | 0.76 | 0.6 | 0.6 |
| | | ΔT | 28 | 26 | 22 | 19 | 28 | 26 | 23 | 19 | 28 | 26 | 22 | 19 | 28 | 26 | 22 | 19 | 28 | 27 | 26 | 22 | 18 | 29 | 27 | 23 | 20 |
| | | kW | 1.12 | 1.12 | 1.12 | 1.1 | 1.25 | 1.24 | 1.24 | 1.3 | 1.38 | 1.38 | 1.38 | 1.4 | 1.53 | 1.53 | 1.53 | 1.5 | 1.70 | 1.70 | 1.70 | 1.70 | 1.7 | 1.89 | 1.89 | 1.89 | 1.9 |
| | | Amps | 4.1 | 4.1 | 4.1 | 4.1 | 4.7 | 4.6 | 4.6 | 4.7 | 5.3 | 5.3 | 5.3 | 5.3 | 5.3 | 6.0 | 6.0 | 6.0 | 6.0 | 6.7 | 6.7 | 6.7 | 6.8 | 7.6 | 7.6 | 7.6 | 7.6 |
| | | Hi PR | 236 | 237 | 239 | 242.6 | 273 | 274 | 275 | 279.4 | 311 | 312 | 314 | 318.0 | 353 | 354 | 355 | 359.5 | 398 | 399 | 400 | 404.3 | 445 | 446 | 448 | 448 | 452.1 |
| | Lo PR | 121 | 123 | 126 | 130.7 | 128 | 130 | 133 | 138.0 | 135 | 136 | 139 | 144.3 | 140 | 142 | 145 | 149.7 | 145 | 147 | 150 | 154.9 | 152 | 153 | 156 | 156 | 161.5 | |
| | 600 | MBh | 18.0 | 18.2 | 18.7 | 19.5 | 17.8 | 18.1 | 18.6 | 19.4 | 17.4 | 17.6 | 18.1 | 18.9 | 16.6 | 16.8 | 17.3 | 18.1 | 15.6 | 15.9 | 16.4 | 17.2 | 14.8 | 15.0 | 15.5 | 16.3 | |
| | | S/T | 1.00 | 0.81 | 0.68 | 0.6 | 1.00 | 0.81 | 0.69 | 0.6 | 1.00 | 0.83 | 0.71 | 0.6 | 1.00 | 0.85 | 0.73 | 0.6 | 1.00 | 1.00 | 0.75 | 0.6 | 1.00 | 1.00 | 0.79 | 0.7 | |
| | | ΔT | 27 | 25 | 21 | 17 | 27 | 25 | 21 | 17 | 27 | 25 | 21 | 18 | 27 | 25 | 21 | 17 | 26 | 24 | 21 | 17 | 27 | 26 | 22 | 18 | |
| | | kW | 1.13 | 1.13 | 1.13 | 1.14 | 1.25 | 1.25 | 1.25 | 1.26 | 1.39 | 1.39 | 1.39 | 1.40 | 1.54 | 1.54 | 1.54 | 1.54 | 1.70 | 1.70 | 1.70 | 1.70 | 1.71 | 1.90 | 1.90 | 1.90 | 1.91 |
| | | Amps | 4.1 | 4.1 | 4.1 | 4.1 | 4.7 | 4.7 | 4.7 | 4.7 | 5.3 | 5.3 | 5.3 | 5.3 | 6.0 | 6.0 | 6.0 | 6.0 | 6.8 | 6.7 | 6.7 | 6.8 | 7.6 | 7.6 | 7.6 | 7.7 | |
| Hi PR | | 238 | 239 | 241 | 245.0 | 275 | 276 | 278 | 281.8 | 314 | 315 | 316 | 320.4 | 355 | 356 | 358 | 361.9 | 400 | 401 | 403 | 406.7 | 448 | 449 | 450 | 454.5 | | |
| Lo PR | 124 | 125 | 128 | 133.2 | 131 | 132 | 135 | 140.4 | 137 | 139 | 142 | 146.7 | 143 | 144 | 147 | 152.1 | 148 | 149 | 152 | 157.3 | 154 | 156 | 159 | 163.9 | | | |
| 675 | MBh | 18.4 | 18.6 | 19.1 | 19.9 | 18.2 | 18.5 | 19.0 | 19.8 | 17.8 | 18.0 | 18.5 | 19.3 | 17.0 | 17.2 | 17.7 | 18.5 | 16.0 | 16.3 | 16.8 | 17.6 | 15.2 | 15.4 | 15.9 | 16.7 | | |
| | S/T | 1.00 | 0.81 | 0.69 | 0.6 | 1.00 | 0.82 | 0.69 | 0.6 | 1.00 | 0.84 | 0.72 | 0.6 | 1.00 | 1.00 | 0.73 | 0.6 | 1.00 | 1.00 | 0.75 | 0.6 | 1.00 | 1.00 | 0.80 | 0.7 | | |
| | ΔT | 26 | 24 | 20 | 17 | 26 | 24 | 20 | 17 | 26 | 24 | 20 | 17 | 26 | 24 | 20 | 16 | 25 | 23 | 20 | 16 | 27 | 25 | 21 | 17 | | |
| | kW | 1.13 | 1.13 | 1.13 | 1.1 | 1.26 | 1.26 | 1.25 | 1.3 | 1.39 | 1.39 | 1.39 | 1.4 | 1.54 | 1.54 | 1.54 | 1.6 | 1.71 | 1.71 | 1.71 | 1.71 | 1.7 | 1.91 | 1.90 | 1.90 | 1.9 | |
| | Amps | 4.1 | 4.1 | 4.1 | 4.2 | 4.7 | 4.7 | 4.7 | 4.7 | 5.3 | 5.3 | 5.3 | 5.4 | 6.0 | 6.0 | 6.0 | 6.0 | 6.8 | 6.8 | 6.8 | 6.8 | 7.7 | 7.7 | 7.7 | 7.7 | | |
| | Hi PR | 241 | 242 | 243 | 247.3 | 277 | 278 | 280 | 284.1 | 316 | 317 | 319 | 322.7 | 357 | 359 | 360 | 364.2 | 402 | 403 | 405 | 409.0 | 450 | 451 | 453 | 456.8 | | |
| Lo PR | 126 | 128 | 131 | 135.8 | 133 | 135 | 138 | 143.0 | 140 | 141 | 144 | 149.4 | 145 | 147 | 150 | 154.7 | 150 | 152 | 155 | 160.0 | 157 | 158 | 162 | 166.6 | | | |
| 85 | 520 | MBh | 17.9 | 18.2 | 18.7 | 19.5 | 17.8 | 18.0 | 18.5 | 19.3 | 17.3 | 17.6 | 18.1 | 18.9 | 16.5 | 16.8 | 17.3 | 18.1 | 15.6 | 15.8 | 16.3 | 17.1 | 14.7 | 15.0 | 15.5 | 16.3 | |
| | | S/T | 1.00 | 0.86 | 0.74 | 0.6 | 1.00 | 0.87 | 0.74 | 0.6 | 1.00 | 1.00 | 0.77 | 0.6 | 1.00 | 1.00 | 0.79 | 0.7 | 1.00 | 1.00 | 0.81 | 0.7 | 1.00 | 1.00 | 0.85 | 0.7 | |
| | | ΔT | 32 | 30 | 26 | 22 | 31 | 30 | 26 | 22 | 32 | 30 | 26 | 23 | 31 | 30 | 26 | 22 | 31 | 29 | 26 | 22 | 32 | 30 | 27 | 23 | |
| | | kW | 1.12 | 1.12 | 1.12 | 1.1 | 1.25 | 1.25 | 1.24 | 1.3 | 1.39 | 1.38 | 1.38 | 1.4 | 1.53 | 1.53 | 1.53 | 1.5 | 1.70 | 1.70 | 1.70 | 1.70 | 1.7 | 1.90 | 1.89 | 1.9 | |
| | | Amps | 4.1 | 4.1 | 4.1 | 4.1 | 4.7 | 4.7 | 4.6 | 4.7 | 5.3 | 5.3 | 5.3 | 5.3 | 6.0 | 6.0 | 6.0 | 6.0 | 6.7 | 6.7 | 6.7 | 6.8 | 7.6 | 7.6 | 7.6 | 7.7 | |
| | | Hi PR | 237 | 238 | 240 | 243.7 | 274 | 275 | 276 | 280.5 | 312 | 313 | 315 | 319.1 | 354 | 355 | 357 | 360.6 | 399 | 400 | 401 | 405.4 | 446 | 447 | 449 | 453.2 | |
| | Lo PR | 123 | 124 | 127 | 132.5 | 130 | 132 | 135 | 139.7 | 137 | 138 | 141 | 146.1 | 142 | 143 | 146 | 151.4 | 147 | 149 | 152 | 156.7 | 154 | 155 | 158 | 163.3 | | |
| | 600 | MBh | 18.3 | 18.5 | 19.0 | 19.8 | 18.1 | 18.3 | 18.9 | 19.7 | 17.7 | 17.9 | 18.4 | 19.2 | 16.9 | 17.1 | 17.6 | 18.4 | 15.9 | 16.2 | 16.7 | 17.5 | 15.1 | 15.3 | 15.8 | 16.6 | |
| | | S/T | 1.00 | 0.90 | 0.77 | 0.6 | 1.00 | 0.90 | 0.78 | 0.6 | 1.00 | 1.00 | 0.80 | 0.7 | 1.00 | 1.00 | 0.82 | 0.7 | 1.00 | 1.00 | 0.84 | 0.7 | 1.00 | 1.00 | 1.00 | 0.8 | |
| | | ΔT | 30 | 28 | 25 | 21 | 30 | 28 | 25 | 21 | 31 | 29 | 25 | 21 | 30 | 28 | 25 | 21 | 30 | 28 | 25 | 21 | 31 | 29 | 26 | 22 | |
| | | kW | 1.13 | 1.13 | 1.13 | 1.14 | 1.25 | 1.25 | 1.25 | 1.26 | 1.39 | 1.39 | 1.39 | 1.40 | 1.54 | 1.54 | 1.54 | 1.55 | 1.71 | 1.71 | 1.71 | 1.71 | 1.90 | 1.90 | 1.90 | 1.91 | |
| | | Amps | 4.1 | 4.1 | 4.1 | 4.2 | 4.7 | 4.7 | 4.7 | 4.7 | 5.3 | 5.3 | 5.3 | 5.4 | 6.0 | 6.0 | 6.0 | 6.0 | 6.8 | 6.8 | 6.8 | 6.8 | 7.7 | 7.7 | 7.7 | 7.7 | |
| Hi PR | | 239 | 240 | 242 | 246.1 | 276 | 277 | 279 | 282.9 | 315 | 316 | 317 | 321.5 | 356 | 357 | 359 | 363.0 | 401 | 402 | 404 | 407.8 | 449 | 450 | 451 | 455.6 | | |
| Lo PR | 125 | 127 | 130 | 134.9 | 133 | 134 | 137 | 142.2 | 139 | 140 | 143 | 148.5 | 144 | 146 | 149 | 153.9 | 150 | 151 | 154 | 159.1 | 156 | 158 | 161 | 165.7 | | | |
| 675 | MBh | 18.7 | 18.9 | 19.4 | 20.2 | 18.5 | 18.7 | 19.3 | 20.1 | 18.1 | 18.3 | 18.8 | 19.6 | 17.3 | 17.5 | 18.0 | 18.8 | 16.3 | 16.6 | 17.1 | 17.9 | 15.5 | 15.7 | 16.2 | 17.0 | | |
| | S/T | 1.00 | 0.90 | 0.78 | 0.6 | 1.00 | 1.00 | 0.78 | 0.7 | 1.00 | 1.00 | 0.81 | 0.7 | 1.00 | 1.00 | 0.83 | 0.7 | 1.00 | 1.00 | 0.85 | 0.7 | 1.00 | 1.00 | 1.00 | 0.8 | | |
| | ΔT | 29 | 27 | 24 | 20 | 29 | 27 | 24 | 20 | 30 | 28 | 24 | 20 | 29 | 27 | 24 | 20 | 29 | 27 | 24 | 20 | 30 | 28 | 25 | 21 | | |
| | kW | 1.14 | 1.14 | 1.13 | 1.1 | 1.26 | 1.26 | 1.26 | 1.3 | 1.40 | 1.40 | 1.39 | 1.4 | 1.55 | 1.55 | 1.54 | 1.6 | 1.71 | 1.71 | 1.71 | 1.71 | 1.7 | 1.91 | 1.91 | 1.9 | | |
| | Amps | 4.2 | 4.1 | 4.1 | 4.2 | 4.7 | 4.7 | 4.7 | 4.7 | 5.3 | 5.3 | 5.3 | 5.4 | 6.0 | 6.0 | 6.0 | 6.1 | 6.8 | 6.8 | 6.8 | 6.8 | 7.7 | 7.7 | 7.7 | 7.7 | | |
| | Hi PR | 242 | 243 | 244 | 248.4 | 278 | 280 | 281 | 285.2 | 317 | 318 | 320 | 323.8 | 359 | 360 | 361 | 365.3 | 403 | 404 | 406 | 410.1 | 451 | 452 | 454 | 457.9 | | |
| Lo PR | 128 | 129 | 133 | 137.6 | 135 | 137 | 140 | 144.8 | 142 | 143 | 146 | 151.2 | 147 | 148 | 151 | 156.5 | 152 | 154 | 157 | 161.8 | 159 | 160 | 163 | 168.3 | | | |

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects AHRI conditions
 kW = Total system power
 Amps = outdoor unit amps (comp. + fan)

| IDB | | OUTDOOR AMBIENT TEMPERATURE | | | | | | | | | | | | ENTERING INDOOR WET BULB TEMPERATURE | | | | | | | | | | | |
|------------|-------|-----------------------------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|--------------------------------------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|
| | | 65 | | | | 75 | | | | 85 | | | | 95 | | | | 105 | | | | 115 | | | |
| | | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 |
| 750 | MBh | 23.0 | 23.3 | 24.0 | - | 22.8 | 23.1 | 23.8 | - | 22.2 | 22.5 | 23.2 | - | 21.2 | 21.5 | 22.2 | - | 19.9 | 20.2 | 20.9 | - | 18.7 | 19.1 | 19.8 | - |
| | S/T | 0.56 | 0.49 | 0.36 | - | 0.56 | 0.49 | 0.37 | - | 0.59 | 0.52 | 0.39 | - | 0.61 | 0.54 | 0.41 | - | 1.00 | 0.56 | 0.43 | - | 1.00 | 0.60 | 0.48 | - |
| | ΔT | 19 | 17 | 14 | - | 19 | 17 | 14 | - | 19 | 18 | 14 | - | 19 | 17 | 14 | - | 19 | 17 | 14 | - | 20 | 18 | 15 | - |
| | kW | 1.49 | 1.49 | 1.49 | - | 1.65 | 1.65 | 1.65 | - | 1.83 | 1.83 | 1.83 | - | 2.03 | 2.03 | 2.02 | - | 2.25 | 2.25 | 2.24 | - | 2.50 | 2.50 | 2.50 | - |
| | Amps | 5.1 | 5.1 | 5.1 | - | 5.9 | 5.9 | 5.9 | - | 6.7 | 6.7 | 6.7 | - | 7.6 | 7.6 | 7.6 | - | 8.6 | 8.6 | 8.6 | - | 9.8 | 9.8 | 9.8 | - |
| | Hi PR | 255 | 256 | 258 | - | 295 | 296 | 298 | - | 337 | 339 | 340 | - | 383 | 384 | 386 | - | 432 | 433 | 435 | - | 484 | 485 | 487 | - |
| Lo PR | 123 | 125 | 128 | - | 131 | 132 | 135 | - | 137 | 139 | 142 | - | 143 | 144 | 147 | - | 148 | 150 | 153 | - | 155 | 157 | 160 | - | |
| 800 | MBh | 23.3 | 23.6 | 24.3 | - | 23.1 | 23.4 | 24.1 | - | 22.5 | 22.8 | 23.5 | - | 21.5 | 21.8 | 22.5 | - | 20.2 | 20.5 | 21.2 | - | 19.0 | 19.4 | 20.1 | - |
| | S/T | 0.61 | 0.54 | 0.42 | - | 0.62 | 0.55 | 0.42 | - | 0.64 | 0.57 | 0.45 | - | 1.00 | 0.59 | 0.47 | - | 1.00 | 0.61 | 0.49 | - | 1.00 | 0.66 | 0.53 | - |
| | ΔT | 18 | 16 | 13 | - | 18 | 16 | 13 | - | 18 | 17 | 13 | - | 18 | 16 | 13 | - | 18 | 16 | 13 | - | 19 | 17 | 14 | - |
| | kW | 1.50 | 1.50 | 1.50 | - | 1.66 | 1.66 | 1.66 | - | 1.84 | 1.84 | 1.84 | - | 2.04 | 2.04 | 2.03 | - | 2.25 | 2.25 | 2.25 | - | 2.51 | 2.51 | 2.51 | - |
| | Amps | 5.2 | 5.2 | 5.2 | - | 5.9 | 5.9 | 5.9 | - | 6.8 | 6.7 | 6.7 | - | 7.6 | 7.6 | 7.6 | - | 8.6 | 8.6 | 8.6 | - | 9.8 | 9.8 | 9.8 | - |
| | Hi PR | 257 | 258 | 260 | - | 297 | 299 | 300 | - | 340 | 341 | 343 | - | 385 | 386 | 388 | - | 434 | 435 | 437 | - | 486 | 487 | 489 | - |
| Lo PR | 125 | 127 | 130 | - | 133 | 134 | 137 | - | 139 | 141 | 144 | - | 145 | 146 | 149 | - | 150 | 152 | 155 | - | 157 | 158 | 162 | - | |
| 900 | MBh | 23.7 | 24.0 | 24.7 | - | 23.5 | 23.8 | 24.5 | - | 22.9 | 23.2 | 23.9 | - | 21.8 | 22.1 | 22.8 | - | 20.6 | 20.9 | 21.6 | - | 19.4 | 19.7 | 20.4 | - |
| | S/T | 0.65 | 0.58 | 0.45 | - | 0.65 | 0.58 | 0.46 | - | 0.67 | 0.60 | 0.48 | - | 1.00 | 0.62 | 0.50 | - | 1.00 | 0.64 | 0.52 | - | 1.00 | 0.69 | 0.56 | - |
| | ΔT | 17 | 15 | 12 | - | 17 | 15 | 12 | - | 17 | 16 | 12 | - | 17 | 15 | 12 | - | 17 | 15 | 12 | - | 18 | 16 | 13 | - |
| | kW | 1.51 | 1.51 | 1.50 | - | 1.67 | 1.67 | 1.66 | - | 1.85 | 1.85 | 1.84 | - | 2.04 | 2.04 | 2.04 | - | 2.26 | 2.26 | 2.26 | - | 2.52 | 2.52 | 2.51 | - |
| | Amps | 5.2 | 5.2 | 5.2 | - | 6.0 | 6.0 | 5.9 | - | 6.8 | 6.8 | 6.8 | - | 7.7 | 7.7 | 7.7 | - | 8.7 | 8.7 | 8.7 | - | 9.8 | 9.8 | 9.8 | - |
| | Hi PR | 259 | 260 | 262 | - | 300 | 301 | 302 | - | 342 | 343 | 345 | - | 387 | 388 | 390 | - | 436 | 437 | 439 | - | 488 | 489 | 491 | - |
| Lo PR | 127 | 129 | 132 | - | 135 | 136 | 139 | - | 141 | 143 | 146 | - | 147 | 148 | 151 | - | 152 | 154 | 157 | - | 159 | 160 | 164 | - | |
| 750 | MBh | 23.0 | 23.3 | 24.0 | 25.1 | 22.8 | 23.1 | 23.8 | 24.9 | 22.2 | 22.5 | 23.2 | 24.3 | 21.2 | 21.5 | 22.2 | 23.2 | 19.9 | 20.2 | 20.9 | 22.0 | 18.8 | 19.1 | 19.8 | 20.8 |
| | S/T | 0.68 | 0.61 | 0.48 | 0.4 | 0.68 | 0.61 | 0.49 | 0.4 | 1.00 | 0.64 | 0.51 | 0.4 | 1.00 | 0.65 | 0.53 | 0.4 | 1.00 | 0.67 | 0.55 | 0.4 | 1.00 | 1.00 | 0.60 | 0.5 |
| | ΔT | 23 | 21 | 18 | 15 | 23 | 21 | 18 | 15 | 23 | 22 | 18 | 15 | 23 | 21 | 18 | 15 | 23 | 21 | 18 | 14 | 24 | 22 | 19 | 15 |
| | kW | 1.49 | 1.49 | 1.49 | 1.5 | 1.65 | 1.65 | 1.65 | 1.7 | 1.83 | 1.83 | 1.83 | 1.8 | 2.03 | 2.03 | 2.02 | 2.0 | 2.25 | 2.24 | 2.24 | 2.3 | 2.50 | 2.50 | 2.50 | 2.5 |
| | Amps | 5.1 | 5.1 | 5.1 | 5.2 | 5.9 | 5.9 | 5.9 | 5.9 | 6.7 | 6.7 | 6.7 | 6.7 | 7.6 | 7.6 | 7.6 | 7.6 | 8.6 | 8.6 | 8.6 | 8.6 | 9.8 | 9.8 | 9.8 | 9.8 |
| | Hi PR | 255 | 256 | 258 | 262.6 | 296 | 297 | 298 | 302.9 | 338 | 339 | 341 | 345.0 | 383 | 384 | 386 | 390.4 | 432 | 433 | 435 | 439.4 | 484 | 485 | 487 | 491.6 |
| Lo PR | 123 | 125 | 128 | 133.2 | 131 | 132 | 135 | 140.6 | 137 | 139 | 142 | 147.2 | 143 | 144 | 148 | 152.8 | 148 | 150 | 153 | 158.2 | 155 | 157 | 160 | 165.0 | |
| 800 | MBh | 23.3 | 23.6 | 24.3 | 25.4 | 23.1 | 23.4 | 24.1 | 25.2 | 22.5 | 22.8 | 23.5 | 24.6 | 21.5 | 21.8 | 22.5 | 23.5 | 20.2 | 20.5 | 21.2 | 22.3 | 19.1 | 19.4 | 20.1 | 21.1 |
| | S/T | 0.73 | 0.66 | 0.54 | 0.4 | 0.74 | 0.67 | 0.54 | 0.4 | 1.00 | 0.69 | 0.57 | 0.4 | 1.00 | 0.71 | 0.58 | 0.5 | 1.00 | 0.73 | 0.60 | 0.5 | 1.00 | 1.00 | 0.65 | 0.5 |
| | ΔT | 22 | 20 | 17 | 14 | 22 | 20 | 17 | 13 | 22 | 20 | 17 | 14 | 22 | 20 | 17 | 13 | 22 | 20 | 17 | 13 | 23 | 21 | 18 | 14 |
| | kW | 1.50 | 1.50 | 1.49 | 1.51 | 1.66 | 1.66 | 1.66 | 1.67 | 1.84 | 1.84 | 1.84 | 1.85 | 2.04 | 2.03 | 2.03 | 2.04 | 2.25 | 2.25 | 2.25 | 2.26 | 2.51 | 2.51 | 2.51 | 2.52 |
| | Amps | 5.2 | 5.2 | 5.2 | 5.2 | 5.9 | 5.9 | 5.9 | 6.0 | 6.7 | 6.7 | 6.7 | 6.8 | 7.6 | 7.6 | 7.6 | 7.7 | 8.6 | 8.6 | 8.6 | 8.7 | 9.8 | 9.8 | 9.8 | 9.8 |
| | Hi PR | 257 | 259 | 260 | 264.8 | 298 | 299 | 301 | 305.0 | 340 | 341 | 343 | 347.2 | 385 | 388 | 388 | 392.6 | 434 | 435 | 437 | 441.6 | 486 | 488 | 489 | 493.8 |
| Lo PR | 125 | 127 | 130 | 135.0 | 133 | 134 | 137 | 142.5 | 139 | 141 | 144 | 149.0 | 145 | 149 | 149 | 154.6 | 150 | 152 | 155 | 160.0 | 157 | 158 | 162 | 166.8 | |
| 900 | MBh | 23.7 | 24.0 | 24.7 | 25.7 | 23.5 | 23.8 | 24.5 | 25.5 | 22.9 | 23.2 | 23.9 | 24.9 | 21.8 | 22.2 | 22.8 | 23.9 | 20.6 | 20.9 | 21.6 | 22.6 | 19.4 | 19.7 | 20.4 | 21.5 |
| | S/T | 0.76 | 0.69 | 0.57 | 0.4 | 1.00 | 0.70 | 0.57 | 0.4 | 1.00 | 0.72 | 0.60 | 0.5 | 1.00 | 0.74 | 0.62 | 0.5 | 1.00 | 0.76 | 0.64 | 0.5 | 1.00 | 1.00 | 0.68 | 0.6 |
| | ΔT | 21 | 19 | 16 | 13 | 21 | 19 | 16 | 13 | 21 | 20 | 16 | 13 | 21 | 19 | 16 | 13 | 21 | 19 | 16 | 12 | 22 | 20 | 17 | 13 |
| | kW | 1.51 | 1.50 | 1.50 | 1.5 | 1.67 | 1.67 | 1.66 | 1.7 | 1.85 | 1.85 | 1.84 | 1.9 | 2.04 | 2.04 | 2.04 | 2.1 | 2.26 | 2.26 | 2.26 | 2.3 | 2.52 | 2.52 | 2.51 | 2.5 |
| | Amps | 5.2 | 5.2 | 5.2 | 5.3 | 6.0 | 5.9 | 5.9 | 6.0 | 6.8 | 6.8 | 6.8 | 6.8 | 7.7 | 7.7 | 7.7 | 7.7 | 8.7 | 8.7 | 8.7 | 8.7 | 9.8 | 9.8 | 9.8 | 9.9 |
| | Hi PR | 260 | 261 | 262 | 266.9 | 300 | 301 | 303 | 307.1 | 342 | 343 | 345 | 349.3 | 387 | 388 | 390 | 394.7 | 436 | 437 | 439 | 443.7 | 489 | 490 | 491 | 495.9 |
| Lo PR | 127 | 129 | 132 | 137.0 | 135 | 136 | 139 | 144.5 | 141 | 143 | 146 | 151.0 | 147 | 148 | 151 | 156.6 | 152 | 154 | 157 | 162.0 | 159 | 160 | 164 | 168.9 | |

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects ACCA (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp. +fan)

EXPANDED COOLING DATA — DX3SQN2410A*/CA*TA2422*4A* (CONT.)

| IDB | | OUTDOOR AMBIENT TEMPERATURE | | | | | | | | | | | | | | | | | | | | | | | |
|-----------|-------|-----------------------------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|
| | | 65 | | | | 75 | | | | 85 | | | | 95 | | | | 105 | | | | 115 | | | |
| | | AIRFLOW | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 |
| 80 | MBh | 23.1 | 23.5 | 24.1 | 25.0 | 22.9 | 23.2 | 23.9 | 24.4 | 22.3 | 22.6 | 23.3 | 24.4 | 21.3 | 21.6 | 22.3 | 23.3 | 20.0 | 20.3 | 21.0 | 22.1 | 18.9 | 19.2 | 19.9 | 20.9 |
| | S/T | 1.00 | 0.72 | 0.60 | 0.5 | 1.00 | 0.78 | 0.66 | 0.5 | 1.00 | 0.75 | 0.63 | 0.5 | 1.00 | 0.77 | 0.64 | 0.5 | 1.00 | 1.00 | 0.67 | 0.5 | 1.00 | 1.00 | 0.71 | 0.6 |
| | ΔT | 27 | 25 | 22 | 19 | 27 | 25 | 22 | 19 | 27 | 25 | 22 | 19 | 27 | 25 | 22 | 18 | 27 | 25 | 22 | 18 | 28 | 26 | 23 | 19 |
| | kW | 1.49 | 1.49 | 1.49 | 1.5 | 1.65 | 1.65 | 1.65 | 1.7 | 1.83 | 1.83 | 1.83 | 1.8 | 2.03 | 2.03 | 2.02 | 2.0 | 2.25 | 2.25 | 2.24 | 2.3 | 2.50 | 2.50 | 2.50 | 2.5 |
| | Amps | 5.1 | 5.1 | 5.1 | 5.2 | 5.9 | 5.9 | 5.9 | 5.9 | 6.7 | 6.7 | 6.7 | 6.7 | 7.6 | 7.6 | 7.6 | 7.6 | 8.6 | 8.6 | 8.6 | 8.6 | 9.8 | 9.8 | 9.8 | 9.8 |
| | Hi PR | 256 | 257 | 259 | 263.1 | 296 | 297 | 299 | 303.3 | 338 | 339 | 341 | 345.5 | 384 | 385 | 386 | 390.9 | 433 | 434 | 435 | 439.9 | 485 | 486 | 488 | 492.1 |
| | Lo PR | 124 | 125 | 128 | 133.7 | 131 | 133 | 136 | 141.2 | 138 | 139 | 143 | 147.8 | 143 | 145 | 148 | 153.3 | 149 | 150 | 154 | 158.8 | 156 | 157 | 160 | 165.6 |
| | MBh | 23.4 | 23.8 | 24.4 | 25.5 | 23.2 | 23.5 | 24.2 | 25.3 | 22.6 | 22.9 | 23.6 | 24.7 | 21.6 | 21.9 | 22.6 | 23.6 | 20.3 | 20.7 | 21.0 | 22.4 | 19.2 | 19.5 | 20.2 | 21.2 |
| | S/T | 1.00 | 0.78 | 0.65 | 0.5 | 1.00 | 0.78 | 0.66 | 0.5 | 1.00 | 0.81 | 0.68 | 0.6 | 1.00 | 1.00 | 0.70 | 0.6 | 1.00 | 1.00 | 0.72 | 0.6 | 1.00 | 1.00 | 0.77 | 0.6 |
| | ΔT | 26 | 24 | 21 | 17 | 26 | 24 | 21 | 17 | 26 | 24 | 21 | 18 | 26 | 24 | 21 | 17 | 26 | 24 | 21 | 17 | 27 | 25 | 22 | 18 |
| kW | 1.50 | 1.50 | 1.50 | 1.51 | 1.66 | 1.66 | 1.66 | 1.67 | 1.84 | 1.84 | 1.84 | 1.85 | 2.04 | 2.04 | 2.04 | 2.03 | 2.25 | 2.25 | 2.25 | 2.26 | 2.51 | 2.51 | 2.51 | 2.52 | |
| Amps | 5.2 | 5.2 | 5.2 | 5.2 | 5.9 | 5.9 | 5.9 | 6.0 | 6.7 | 6.7 | 6.7 | 6.8 | 7.6 | 7.6 | 7.6 | 7.7 | 8.6 | 8.6 | 8.6 | 8.7 | 9.8 | 9.8 | 9.8 | 9.9 | |
| Hi PR | 258 | 259 | 261 | 265.3 | 298 | 299 | 301 | 305.5 | 340 | 341 | 343 | 347.7 | 386 | 387 | 389 | 393.1 | 435 | 436 | 438 | 442.0 | 487 | 488 | 490 | 494.3 | |
| Lo PR | 126 | 127 | 130 | 135.5 | 133 | 135 | 138 | 143.0 | 140 | 141 | 144 | 149.6 | 145 | 147 | 150 | 155.1 | 151 | 152 | 155 | 160.6 | 157 | 159 | 162 | 167.4 | |
| MBh | 23.8 | 24.1 | 24.8 | 25.9 | 23.6 | 23.9 | 24.6 | 25.6 | 23.0 | 23.3 | 24.0 | 25.0 | 22.0 | 22.3 | 23.0 | 24.0 | 20.7 | 21.0 | 21.7 | 22.7 | 19.5 | 19.9 | 20.5 | 21.6 | |
| S/T | 1.00 | 0.81 | 0.68 | 0.6 | 1.00 | 0.82 | 0.69 | 0.6 | 1.00 | 0.84 | 0.71 | 0.6 | 1.00 | 1.00 | 0.73 | 0.6 | 1.00 | 1.00 | 0.75 | 0.6 | 1.00 | 1.00 | 0.80 | 0.7 | |
| ΔT | 25 | 23 | 20 | 17 | 25 | 23 | 20 | 16 | 25 | 24 | 20 | 17 | 25 | 23 | 20 | 16 | 25 | 23 | 20 | 16 | 26 | 24 | 21 | 17 | |
| kW | 1.51 | 1.50 | 1.50 | 1.5 | 1.67 | 1.67 | 1.66 | 1.7 | 1.85 | 1.85 | 1.84 | 1.9 | 2.04 | 2.04 | 2.04 | 2.1 | 2.26 | 2.26 | 2.26 | 2.3 | 2.52 | 2.52 | 2.51 | 2.5 | |
| Amps | 5.2 | 5.2 | 5.2 | 5.3 | 6.0 | 6.0 | 5.9 | 6.0 | 6.8 | 6.8 | 6.8 | 6.8 | 7.7 | 7.7 | 7.7 | 7.7 | 8.7 | 8.7 | 8.7 | 8.7 | 9.8 | 9.8 | 9.8 | 9.9 | |
| Hi PR | 260 | 261 | 263 | 267.4 | 300 | 301 | 303 | 307.6 | 342 | 344 | 345 | 349.8 | 388 | 389 | 391 | 395.2 | 437 | 438 | 440 | 444.1 | 489 | 490 | 492 | 496.4 | |
| Lo PR | 128 | 129 | 132 | 137.5 | 135 | 137 | 140 | 145.0 | 142 | 143 | 146 | 151.6 | 147 | 149 | 152 | 157.1 | 153 | 154 | 157 | 162.6 | 159 | 161 | 164 | 169.4 | |

| IDB | | OUTDOOR AMBIENT TEMPERATURE | | | | | | | | | | | | | | | | | | | | | | | |
|------------|-------|-----------------------------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|
| | | 65 | | | | 75 | | | | 85 | | | | 95 | | | | 105 | | | | 115 | | | |
| | | AIRFLOW | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 |
| 750 | MBh | 23.5 | 23.8 | 24.5 | 25.6 | 23.3 | 23.6 | 24.3 | 25.4 | 22.7 | 23.0 | 23.7 | 24.8 | 21.7 | 22.0 | 22.7 | 23.7 | 20.4 | 20.7 | 21.4 | 22.5 | 19.3 | 19.6 | 20.3 | 21.3 |
| | S/T | 1.00 | 0.82 | 0.69 | 0.6 | 1.00 | 0.82 | 0.70 | 0.6 | 1.00 | 1.00 | 0.72 | 0.6 | 1.00 | 1.00 | 0.74 | 0.6 | 1.00 | 1.00 | 0.76 | 0.6 | 1.00 | 1.00 | 1.00 | 0.7 |
| | ΔT | 31 | 29 | 25 | 22 | 30 | 29 | 25 | 22 | 31 | 29 | 26 | 22 | 30 | 29 | 25 | 22 | 30 | 28 | 25 | 22 | 31 | 30 | 26 | 23 |
| | kW | 1.49 | 1.49 | 1.49 | 1.5 | 1.66 | 1.65 | 1.65 | 1.7 | 1.84 | 1.83 | 1.83 | 1.8 | 2.03 | 2.03 | 2.03 | 2.0 | 2.25 | 2.25 | 2.25 | 2.3 | 2.51 | 2.50 | 2.50 | 2.5 |
| | Amps | 5.2 | 5.2 | 5.1 | 5.2 | 5.9 | 5.9 | 5.9 | 5.9 | 6.7 | 6.7 | 6.7 | 6.8 | 7.6 | 7.6 | 7.6 | 7.7 | 8.6 | 8.6 | 8.6 | 8.7 | 9.8 | 9.8 | 9.8 | 9.8 |
| | Hi PR | 257 | 258 | 260 | 264.3 | 297 | 298 | 300 | 304.5 | 339 | 340 | 342 | 346.7 | 385 | 386 | 388 | 392.1 | 434 | 435 | 437 | 441.1 | 486 | 487 | 489 | 493.3 |
| | Lo PR | 126 | 127 | 130 | 135.5 | 133 | 135 | 138 | 143.0 | 140 | 141 | 144 | 149.6 | 145 | 147 | 150 | 155.2 | 151 | 152 | 155 | 160.6 | 158 | 159 | 162 | 167.4 |
| | MBh | 23.8 | 24.1 | 24.8 | 25.9 | 23.6 | 23.9 | 24.6 | 25.7 | 23.0 | 23.3 | 24.0 | 25.1 | 22.0 | 22.3 | 23.0 | 24.0 | 20.7 | 21.0 | 21.7 | 22.8 | 19.6 | 19.9 | 20.6 | 21.6 |
| | S/T | 1.00 | 0.87 | 0.75 | 0.6 | 1.00 | 1.00 | 0.75 | 0.6 | 1.00 | 1.00 | 0.78 | 0.6 | 1.00 | 1.00 | 0.79 | 0.7 | 1.00 | 1.00 | 0.81 | 0.7 | 1.00 | 1.00 | 1.00 | 0.7 |
| | ΔT | 29 | 28 | 24 | 21 | 29 | 28 | 24 | 21 | 29 | 28 | 25 | 21 | 29 | 28 | 24 | 21 | 29 | 27 | 24 | 21 | 30 | 29 | 25 | 22 |
| kW | 1.50 | 1.50 | 1.50 | 1.51 | 1.66 | 1.66 | 1.66 | 1.67 | 1.84 | 1.84 | 1.84 | 1.85 | 2.04 | 2.04 | 2.04 | 2.05 | 2.26 | 2.26 | 2.25 | 2.27 | 2.51 | 2.51 | 2.51 | 2.52 | |
| Amps | 5.2 | 5.2 | 5.2 | 5.2 | 5.9 | 5.9 | 5.9 | 6.0 | 6.8 | 6.8 | 6.7 | 6.8 | 7.7 | 7.7 | 7.6 | 7.7 | 8.7 | 8.7 | 8.6 | 8.7 | 9.8 | 9.8 | 9.8 | 9.9 | |
| Hi PR | 259 | 260 | 262 | 266.5 | 299 | 300 | 302 | 306.7 | 342 | 343 | 344 | 348.9 | 387 | 388 | 390 | 394.3 | 436 | 437 | 439 | 443.2 | 488 | 489 | 491 | 495.5 | |
| Lo PR | 127 | 129 | 132 | 137.4 | 135 | 136 | 140 | 144.9 | 142 | 143 | 146 | 151.4 | 147 | 149 | 152 | 157.0 | 153 | 154 | 157 | 162.4 | 159 | 161 | 164 | 169.2 | |
| MBh | 24.2 | 24.5 | 25.2 | 26.2 | 24.0 | 24.3 | 25.0 | 26.0 | 23.4 | 23.7 | 24.4 | 25.4 | 22.3 | 22.7 | 23.4 | 24.4 | 21.1 | 21.4 | 22.1 | 23.1 | 19.9 | 20.2 | 20.9 | 22.0 | |
| S/T | 1.00 | 0.90 | 0.78 | 0.6 | 1.00 | 1.00 | 0.78 | 0.7 | 1.00 | 1.00 | 0.81 | 0.7 | 1.00 | 1.00 | 0.82 | 0.7 | 1.00 | 1.00 | 0.80 | 0.7 | 1.00 | 1.00 | 1.00 | 0.8 | |
| ΔT | 29 | 27 | 23 | 20 | 29 | 27 | 23 | 20 | 29 | 27 | 24 | 20 | 29 | 27 | 23 | 20 | 28 | 26 | 23 | 20 | 29 | 28 | 24 | 21 | |
| kW | 1.51 | 1.51 | 1.51 | 1.5 | 1.67 | 1.67 | 1.67 | 1.7 | 1.85 | 1.85 | 1.85 | 1.9 | 2.05 | 2.05 | 2.04 | 2.1 | 2.26 | 2.26 | 2.26 | 2.3 | 2.52 | 2.52 | 2.52 | 2.5 | |
| Amps | 5.2 | 5.2 | 5.2 | 5.3 | 6.0 | 6.0 | 6.0 | 6.0 | 6.8 | 6.8 | 6.8 | 6.8 | 7.7 | 7.7 | 7.7 | 7.7 | 8.7 | 8.7 | 8.7 | 8.7 | 9.9 | 9.9 | 9.9 | 9.9 | |
| Hi PR | 261 | 262 | 264 | 268.6 | 301 | 303 | 304 | 308.8 | 344 | 345 | 347 | 351.0 | 389 | 390 | 392 | 396.4 | 438 | 439 | 441 | 445.3 | 490 | 491 | 493 | 497.6 | |
| Lo PR | 129 | 131 | 134 | 139.4 | 137 | 138 | 142 | 146.9 | 144 | 145 | 148 | 153.4 | 149 | 151 | 154 | 159.0 | 155 | 156 | 159 | 164.4 | 161 | 163 | 166 | 171.2 | |

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects AHRI conditions
 kW = Total system power
 Amps = outdoor unit amps (comp.+fan)

| IDB | | OUTDOOR AMBIENT TEMPERATURE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|-------------|-----------------------------|------|-------|----------|-------|------|-----------------------------|-------|-------|----------|-------|-------|-----------------------------|------|-------|----------|-------|------|-----------------------------|-------|-------|----------|-------|-------|-----------------------------|------|--|----------|--|--|-----------------------------|--|--|--|--|--|
| | | 65 | | | | | | 75 | | | | | | 85 | | | | | | 95 | | | | | | 105 | | | | | | 115 | | | | | |
| | | AIRFLOW | | | ENTERING | | | INDOOR WET BULB TEMPERATURE | | | ENTERING | | | INDOOR WET BULB TEMPERATURE | | | ENTERING | | | INDOOR WET BULB TEMPERATURE | | | ENTERING | | | INDOOR WET BULB TEMPERATURE | | | ENTERING | | | INDOOR WET BULB TEMPERATURE | | | | | |
| 70 | 875 | MBh | 28.7 | 29.1 | 29.9 | - | 28.4 | 28.8 | 29.7 | - | 27.7 | 28.1 | 28.9 | - | 26.4 | 26.8 | 27.6 | - | 24.8 | 25.2 | 26.0 | - | 23.3 | 23.7 | 24.6 | - | | | | | | | | | | | |
| | | S/T | 0.54 | 0.46 | 0.33 | - | 0.54 | 0.47 | 0.33 | - | 0.57 | 0.49 | 0.36 | - | 0.58 | 0.51 | 0.38 | - | 1.00 | 0.53 | 0.40 | - | 1.00 | 0.58 | 0.45 | - | | | | | | | | | | | |
| | | ΔT | 20 | 19 | 15 | - | 20 | 18 | 15 | - | 21 | 19 | 15 | - | 20 | 18 | 15 | - | 20 | 18 | 15 | - | 21 | 19 | 16 | - | | | | | | | | | | | |
| | | kW | 1.89 | 1.88 | 1.88 | - | 2.10 | 2.09 | 2.09 | - | 2.33 | 2.33 | 2.33 | - | 2.59 | 2.59 | 2.58 | - | 2.87 | 2.87 | 2.87 | - | 3.21 | 3.20 | 3.20 | - | | | | | | | | | | | |
| | | Amps | 6.6 | 6.6 | 6.6 | - | 7.6 | 7.6 | 7.5 | - | 8.6 | 8.6 | 8.6 | - | 9.8 | 9.8 | 9.8 | - | 11.1 | 11.1 | 11.1 | - | 12.6 | 12.6 | 12.6 | - | | | | | | | | | | | |
| | | Hi PR | 253 | 255 | 256 | - | 294 | 295 | 297 | - | 336 | 337 | 339 | - | 381 | 382 | 384 | - | 430 | 431 | 433 | - | 482 | 484 | 485 | - | | | | | | | | | | | |
| | Lo PR | 122 | 124 | 127 | - | 130 | 131 | 134 | - | 136 | 138 | 141 | - | 142 | 143 | 146 | - | 147 | 149 | 152 | - | 154 | 155 | 159 | - | | | | | | | | | | | | |
| | 1000 | MBh | 29.0 | 29.4 | 30.2 | - | 28.7 | 29.1 | 30.0 | - | 28.0 | 28.4 | 29.2 | - | 26.7 | 27.1 | 27.9 | - | 25.1 | 25.5 | 26.4 | - | 23.6 | 24.0 | 24.9 | - | | | | | | | | | | | |
| | | S/T | 0.61 | 0.53 | 0.40 | - | 0.61 | 0.54 | 0.41 | - | 0.64 | 0.56 | 0.43 | - | 1.00 | 0.58 | 0.45 | - | 1.00 | 0.60 | 0.47 | - | 1.00 | 0.66 | 0.52 | - | | | | | | | | | | | |
| | | ΔT | 19 | 17 | 14 | - | 19 | 17 | 14 | - | 19 | 18 | 14 | - | 19 | 17 | 14 | - | 19 | 17 | 14 | - | 20 | 18 | 15 | - | | | | | | | | | | | |
| | | kW | 1.90 | 1.90 | 1.89 | - | 2.11 | 2.11 | 2.10 | - | 2.34 | 2.34 | 2.34 | - | 2.60 | 2.60 | 2.59 | - | 2.88 | 2.88 | 2.88 | - | 3.22 | 3.22 | 3.21 | - | | | | | | | | | | | |
| | | Amps | 6.7 | 6.7 | 6.6 | - | 7.6 | 7.6 | 7.6 | - | 8.7 | 8.7 | 8.7 | - | 9.9 | 9.9 | 9.8 | - | 11.2 | 11.2 | 11.1 | - | 12.7 | 12.7 | 12.7 | - | | | | | | | | | | | |
| Hi PR | | 256 | 257 | 258 | - | 296 | 297 | 299 | - | 338 | 339 | 341 | - | 383 | 385 | 386 | - | 432 | 433 | 435 | - | 485 | 486 | 487 | - | | | | | | | | | | | | |
| Lo PR | 124 | 125 | 128 | - | 131 | 133 | 136 | - | 138 | 139 | 142 | - | 143 | 145 | 148 | - | 149 | 150 | 153 | - | 156 | 157 | 160 | - | | | | | | | | | | | | | |
| 1105 | MBh | 29.3 | 29.7 | 30.5 | - | 29.0 | 29.4 | 30.3 | - | 28.3 | 28.7 | 29.5 | - | 27.0 | 27.4 | 28.2 | - | 25.4 | 25.8 | 26.6 | - | 23.9 | 24.3 | 25.2 | - | | | | | | | | | | | | |
| | S/T | 0.65 | 0.58 | 0.44 | - | 0.66 | 0.58 | 0.45 | - | 0.68 | 0.61 | 0.47 | - | 1.00 | 0.63 | 0.49 | - | 1.00 | 0.65 | 0.51 | - | 1.00 | 0.70 | 0.56 | - | | | | | | | | | | | | |
| | ΔT | 18 | 17 | 13 | - | 18 | 17 | 13 | - | 19 | 17 | 13 | - | 18 | 16 | 13 | - | 18 | 16 | 13 | - | 19 | 17 | 14 | - | | | | | | | | | | | | |
| | kW | 1.91 | 1.90 | 1.90 | - | 2.12 | 2.11 | 2.11 | - | 2.35 | 2.35 | 2.35 | - | 2.61 | 2.60 | 2.60 | - | 2.89 | 2.89 | 2.89 | - | 3.23 | 3.22 | 3.22 | - | | | | | | | | | | | | |
| | Amps | 6.7 | 6.7 | 6.7 | - | 7.7 | 7.7 | 7.6 | - | 8.7 | 8.7 | 8.7 | - | 9.9 | 9.9 | 9.9 | - | 11.2 | 11.2 | 11.2 | - | 12.7 | 12.7 | 12.7 | - | | | | | | | | | | | | |
| | Hi PR | 257 | 258 | 260 | - | 297 | 299 | 300 | - | 340 | 341 | 343 | - | 385 | 386 | 388 | - | 434 | 435 | 437 | - | 486 | 487 | 489 | - | | | | | | | | | | | | |
| Lo PR | 125 | 127 | 130 | - | 133 | 134 | 137 | - | 139 | 141 | 144 | - | 145 | 146 | 149 | - | 150 | 152 | 155 | - | 157 | 158 | 162 | - | | | | | | | | | | | | | |
| 75 | 875 | MBh | 28.7 | 29.1 | 30.0 | 31.3 | 28.4 | 28.8 | 29.7 | 31.0 | 27.7 | 28.1 | 28.9 | 30.3 | 26.4 | 26.8 | 27.7 | 29.0 | 24.8 | 25.2 | 26.1 | 27.4 | 23.3 | 23.8 | 24.6 | 25.9 | | | | | | | | | | | |
| | | S/T | 0.66 | 0.59 | 0.45 | 0.3 | 0.67 | 0.59 | 0.46 | 0.3 | 1.00 | 0.62 | 0.49 | 0.3 | 1.00 | 0.64 | 0.50 | 0.4 | 1.00 | 0.66 | 0.53 | 0.4 | 1.00 | 1.00 | 0.58 | 0.4 | | | | | | | | | | | |
| | | ΔT | 24 | 22 | 19 | 16 | 24 | 22 | 19 | 16 | 24 | 23 | 19 | 16 | 24 | 22 | 19 | 16 | 24 | 22 | 19 | 15 | 25 | 23 | 20 | 16 | | | | | | | | | | | |
| | | kW | 1.88 | 1.88 | 1.88 | 1.9 | 2.10 | 2.09 | 2.09 | 2.1 | 2.33 | 2.33 | 2.33 | 2.3 | 2.59 | 2.58 | 2.58 | 2.6 | 2.89 | 2.87 | 2.86 | 2.9 | 3.20 | 3.20 | 3.20 | 3.2 | | | | | | | | | | | |
| | | Amps | 6.6 | 6.6 | 6.6 | 6.7 | 7.6 | 7.6 | 7.5 | 7.6 | 8.6 | 8.6 | 8.6 | 8.7 | 9.8 | 9.8 | 9.8 | 9.9 | 11.1 | 11.1 | 11.1 | 11.2 | 12.6 | 12.6 | 12.6 | 12.7 | | | | | | | | | | | |
| | | Hi PR | 254 | 255 | 257 | 261.1 | 294 | 295 | 297 | 301.3 | 336 | 337 | 339 | 343.5 | 382 | 383 | 384 | 388.9 | 430 | 432 | 433 | 437.8 | 483 | 484 | 486 | 490.1 | | | | | | | | | | | |
| | Lo PR | 122 | 124 | 127 | 132.0 | 130 | 131 | 134 | 139.5 | 136 | 138 | 141 | 146.1 | 142 | 143 | 146 | 151.6 | 147 | 149 | 152 | 157.1 | 154 | 155 | 159 | 163.9 | | | | | | | | | | | | |
| | 1000 | MBh | 29.0 | 29.4 | 30.3 | 31.6 | 28.7 | 29.1 | 30.0 | 31.3 | 28.0 | 28.4 | 29.3 | 30.6 | 26.7 | 27.1 | 28.0 | 29.3 | 27.0 | 25.1 | 25.5 | 26.4 | 27.7 | 23.6 | 24.1 | 24.9 | 26.2 | | | | | | | | | | |
| | | S/T | 0.73 | 0.66 | 0.53 | 0.4 | 0.74 | 0.67 | 0.53 | 0.4 | 1.00 | 0.69 | 0.56 | 0.4 | 1.00 | 0.71 | 0.58 | 0.4 | 1.00 | 0.73 | 0.60 | 0.5 | 1.00 | 1.00 | 0.65 | 0.5 | | | | | | | | | | | |
| | | ΔT | 23 | 21 | 18 | 14 | 23 | 21 | 18 | 14 | 23 | 22 | 18 | 15 | 23 | 21 | 18 | 14 | 23 | 21 | 18 | 14 | 24 | 22 | 19 | 15 | | | | | | | | | | | |
| | | kW | 1.90 | 1.89 | 1.89 | 1.91 | 2.11 | 2.10 | 2.10 | 2.12 | 2.34 | 2.34 | 2.34 | 2.35 | 2.60 | 2.60 | 2.59 | 2.61 | 2.88 | 2.88 | 2.88 | 2.89 | 3.22 | 3.22 | 3.21 | 3.23 | | | | | | | | | | | |
| | | Amps | 6.7 | 6.6 | 6.6 | 6.7 | 7.6 | 7.6 | 7.6 | 7.7 | 8.7 | 8.7 | 8.7 | 8.7 | 9.9 | 9.9 | 9.9 | 9.9 | 11.2 | 11.2 | 11.1 | 11.2 | 12.7 | 12.7 | 12.7 | 12.7 | | | | | | | | | | | |
| Hi PR | | 256 | 257 | 259 | 263.2 | 296 | 297 | 299 | 303.4 | 338 | 339 | 341 | 345.6 | 384 | 385 | 387 | 391.0 | 433 | 434 | 435 | 439.9 | 485 | 486 | 488 | 492.2 | | | | | | | | | | | | |
| Lo PR | 124 | 125 | 128 | 133.6 | 131 | 133 | 136 | 141.1 | 138 | 139 | 142 | 147.6 | 143 | 145 | 148 | 153.2 | 149 | 150 | 153 | 158.6 | 156 | 157 | 160 | 165.5 | | | | | | | | | | | | | |
| 1105 | MBh | 29.3 | 29.7 | 30.6 | 31.9 | 29.0 | 29.4 | 30.3 | 31.6 | 28.3 | 28.7 | 29.5 | 30.9 | 27.0 | 27.4 | 28.3 | 29.6 | 25.4 | 25.8 | 26.7 | 28.0 | 23.9 | 24.4 | 25.2 | 26.5 | | | | | | | | | | | | |
| | S/T | 0.78 | 0.70 | 0.57 | 0.4 | 0.78 | 0.71 | 0.58 | 0.4 | 1.00 | 0.73 | 0.60 | 0.5 | 1.00 | 0.75 | 0.62 | 0.5 | 1.00 | 0.77 | 0.64 | 0.5 | 1.00 | 1.00 | 0.69 | 0.6 | | | | | | | | | | | | |
| | ΔT | 22 | 21 | 17 | 14 | 22 | 20 | 17 | 14 | 22 | 21 | 17 | 14 | 22 | 20 | 17 | 14 | 22 | 20 | 17 | 13 | 23 | 21 | 18 | 14 | | | | | | | | | | | | |
| | kW | 1.90 | 1.90 | 1.90 | 1.9 | 2.11 | 2.11 | 2.11 | 2.1 | 2.35 | 2.35 | 2.34 | 2.4 | 2.61 | 2.60 | 2.60 | 2.62 | 2.89 | 2.89 | 2.88 | 2.9 | 3.22 | 3.22 | 3.22 | 3.2 | | | | | | | | | | | | |
| | Amps | 6.7 | 6.7 | 6.7 | 6.7 | 7.7 | 7.6 | 7.6 | 7.7 | 8.7 | 8.7 | 8.7 | 8.8 | 9.9 | 9.9 | 9.9 | 9.9 | 11.2 | 11.2 | 11.2 | 11.3 | 12.7 | 12.7 | 12.7 | 12.8 | | | | | | | | | | | | |
| | Hi PR | 257 | 259 | 260 | 264.8 | 298 | 299 | 301 | 305.0 | 340 | 341 | 343 | 347.2 | 385 | 386 | 388 | 392.6 | 434 | 435 | 437 | 441.6 | 486 | 488 | 489 | 493.8 | | | | | | | | | | | | |
| Lo PR | 125 | 127 | 130 | 135.0 | 133 | 134 | 137 | 142.5 | 139 | 141 | 144 | 149.0 | 145 | 146 | 149 | 154.6 | 150 | 152 | 155 | 160.0 | 157 | 158 | 162 | 166.8 | | | | | | | | | | | | | |

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects ACCA (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp.+fan)

| IDB | | Outdoor Ambient Temperature | | | | | | | | | | | | | | | | | | | | | | | |
|---------|-------|--------------------------------------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|
| | | 65 | | | | 75 | | | | 85 | | | | 95 | | | | 105 | | | | 115 | | | |
| | | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 |
| | | Entering Indoor Wet Bulb Temperature | | | | | | | | | | | | | | | | | | | | | | | |
| Airflow | | | | | | | | | | | | | | | | | | | | | | | | | |
| 80 | MBh | 28.8 | 29.2 | 30.1 | 31.4 | 28.6 | 29.0 | 29.9 | 31.2 | 27.8 | 28.2 | 29.1 | 30.4 | 26.5 | 26.9 | 27.8 | 29.1 | 24.9 | 25.4 | 26.2 | 27.5 | 23.5 | 23.9 | 24.8 | 26.1 |
| | S/T | 1.00 | 0.71 | 0.58 | 0.4 | 1.00 | 0.74 | 0.61 | 0.5 | 1.00 | 0.76 | 0.63 | 0.5 | 1.00 | 0.76 | 0.63 | 0.5 | 1.00 | 1.00 | 0.65 | 0.5 | 1.00 | 1.00 | 0.70 | 0.6 |
| | ΔT | 28 | 26 | 23 | 20 | 28 | 26 | 23 | 20 | 28 | 27 | 23 | 20 | 28 | 26 | 23 | 20 | 28 | 26 | 23 | 19 | 29 | 27 | 24 | 20 |
| | kW | 1.89 | 1.88 | 1.88 | 1.9 | 2.10 | 2.09 | 2.09 | 2.1 | 2.33 | 2.33 | 2.33 | 2.3 | 2.59 | 2.58 | 2.58 | 2.6 | 2.87 | 2.87 | 2.87 | 2.9 | 3.21 | 3.20 | 3.20 | 3.2 |
| | Amps | 6.6 | 6.6 | 6.6 | 6.7 | 7.6 | 7.6 | 7.5 | 7.6 | 8.6 | 8.6 | 8.6 | 8.7 | 9.8 | 9.8 | 9.8 | 9.9 | 11.1 | 11.1 | 11.1 | 11.2 | 12.6 | 12.6 | 12.6 | 12.7 |
| | Hi PR | 254 | 255 | 257 | 261.5 | 294 | 296 | 297 | 301.8 | 337 | 338 | 339 | 343.9 | 382 | 383 | 385 | 389.3 | 431 | 432 | 434 | 438.3 | 483 | 484 | 486 | 490.5 |
| Lo PR | 123 | 124 | 127 | 132.5 | 130 | 132 | 135 | 140.0 | 137 | 138 | 141 | 146.6 | 142 | 144 | 147 | 152.2 | 148 | 149 | 152 | 157.6 | 155 | 156 | 159 | 164.4 | |
| 1000 | MBh | 29.1 | 29.6 | 30.4 | 31.7 | 28.9 | 29.3 | 30.2 | 31.5 | 28.1 | 28.5 | 29.4 | 30.7 | 26.8 | 27.2 | 28.1 | 29.4 | 25.2 | 25.7 | 26.5 | 27.8 | 23.8 | 24.2 | 25.1 | 26.4 |
| | S/T | 1.00 | 0.78 | 0.65 | 0.5 | 1.00 | 0.79 | 0.66 | 0.5 | 1.00 | 0.81 | 0.68 | 0.5 | 1.00 | 1.00 | 0.70 | 0.6 | 1.00 | 1.00 | 0.72 | 0.6 | 1.00 | 1.00 | 0.77 | 0.6 |
| | ΔT | 27 | 25 | 22 | 18 | 27 | 25 | 22 | 18 | 27 | 26 | 22 | 19 | 27 | 25 | 22 | 18 | 27 | 25 | 22 | 18 | 28 | 26 | 23 | 19 |
| | kW | 1.90 | 1.90 | 1.89 | 1.91 | 2.11 | 2.11 | 2.10 | 2.12 | 2.34 | 2.34 | 2.34 | 2.35 | 2.60 | 2.60 | 2.59 | 2.61 | 2.88 | 2.88 | 2.88 | 2.89 | 3.22 | 3.22 | 3.21 | 3.23 |
| | Amps | 6.7 | 6.7 | 6.6 | 6.7 | 7.6 | 7.6 | 7.6 | 7.7 | 8.7 | 8.7 | 8.7 | 8.8 | 9.9 | 9.9 | 9.8 | 9.9 | 11.2 | 11.2 | 11.2 | 11.2 | 12.7 | 12.7 | 12.7 | 12.7 |
| | Hi PR | 256 | 257 | 259 | 263.6 | 297 | 298 | 299 | 303.9 | 339 | 340 | 342 | 346.0 | 384 | 385 | 387 | 391.4 | 433 | 434 | 436 | 440.4 | 485 | 486 | 488 | 492.6 |
| Lo PR | 124 | 126 | 129 | 134.1 | 132 | 133 | 136 | 141.6 | 138 | 140 | 143 | 148.2 | 144 | 145 | 148 | 153.7 | 149 | 151 | 154 | 159.2 | 156 | 158 | 161 | 166.0 | |
| 1105 | MBh | 29.4 | 29.8 | 30.7 | 32.0 | 29.2 | 29.6 | 30.5 | 31.8 | 28.4 | 28.8 | 29.7 | 31.0 | 27.1 | 27.5 | 28.4 | 29.7 | 25.5 | 26.0 | 26.8 | 28.1 | 24.1 | 24.5 | 25.4 | 26.7 |
| | S/T | 1.00 | 0.82 | 0.69 | 0.6 | 1.00 | 0.83 | 0.70 | 0.6 | 1.00 | 0.85 | 0.72 | 0.6 | 1.00 | 1.00 | 0.74 | 0.6 | 1.00 | 1.00 | 0.76 | 0.6 | 1.00 | 1.00 | 0.81 | 0.7 |
| | ΔT | 26 | 25 | 21 | 18 | 26 | 24 | 21 | 18 | 27 | 25 | 21 | 18 | 26 | 24 | 21 | 18 | 26 | 24 | 21 | 17 | 27 | 25 | 22 | 18 |
| | kW | 1.90 | 1.90 | 1.90 | 1.9 | 2.12 | 2.11 | 2.11 | 2.1 | 2.35 | 2.35 | 2.35 | 2.4 | 2.61 | 2.60 | 2.60 | 2.6 | 2.89 | 2.89 | 2.89 | 2.9 | 3.22 | 3.22 | 3.22 | 3.2 |
| | Amps | 6.7 | 6.7 | 6.7 | 6.7 | 7.7 | 7.7 | 7.6 | 7.7 | 8.7 | 8.7 | 8.7 | 8.8 | 9.9 | 9.9 | 9.9 | 10.0 | 11.2 | 11.2 | 11.2 | 11.3 | 12.7 | 12.7 | 12.7 | 12.8 |
| | Hi PR | 258 | 259 | 261 | 265.3 | 298 | 299 | 301 | 305.5 | 340 | 341 | 343 | 347.7 | 386 | 387 | 389 | 393.1 | 435 | 436 | 438 | 442.0 | 487 | 488 | 490 | 494.3 |
| Lo PR | 126 | 127 | 130 | 135.5 | 133 | 135 | 138 | 143.0 | 140 | 141 | 144 | 149.6 | 145 | 147 | 150 | 155.1 | 151 | 152 | 155 | 160.6 | 157 | 159 | 162 | 167.4 | |

| | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|-------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|
| 875 | MBh | 29.3 | 29.7 | 30.6 | 31.9 | 29.1 | 29.5 | 30.3 | 31.7 | 28.3 | 28.7 | 29.6 | 30.9 | 27.0 | 27.4 | 28.3 | 29.6 | 25.4 | 25.8 | 26.7 | 28.0 | 24.0 | 24.4 | 25.3 | 26.6 |
| | S/T | 1.00 | 0.81 | 0.68 | 0.5 | 1.00 | 0.81 | 0.68 | 0.5 | 1.00 | 1.00 | 0.71 | 0.6 | 1.00 | 1.00 | 0.73 | 0.6 | 1.00 | 1.00 | 0.75 | 0.6 | 1.00 | 1.00 | 1.00 | 0.7 |
| | ΔT | 32 | 30 | 27 | 23 | 32 | 30 | 27 | 23 | 32 | 30 | 27 | 23 | 32 | 30 | 27 | 23 | 31 | 30 | 26 | 23 | 33 | 31 | 27 | 24 |
| | kW | 1.89 | 1.89 | 1.88 | 1.9 | 2.10 | 2.10 | 2.09 | 2.1 | 2.34 | 2.33 | 2.33 | 2.3 | 2.59 | 2.59 | 2.59 | 2.6 | 2.88 | 2.87 | 2.87 | 2.9 | 3.21 | 3.21 | 3.20 | 3.2 |
| | Amps | 6.6 | 6.6 | 6.6 | 6.7 | 7.6 | 7.6 | 7.6 | 7.6 | 8.7 | 8.7 | 8.6 | 8.7 | 9.8 | 9.8 | 9.8 | 9.9 | 11.1 | 11.1 | 11.1 | 11.2 | 12.7 | 12.7 | 12.7 | 12.7 |
| | Hi PR | 255 | 256 | 258 | 262.7 | 296 | 297 | 299 | 303.0 | 338 | 339 | 341 | 345.1 | 383 | 384 | 386 | 390.5 | 432 | 433 | 435 | 439.5 | 484 | 485 | 487 | 491.7 |
| Lo PR | 124 | 126 | 129 | 134.4 | 132 | 134 | 137 | 141.9 | 139 | 140 | 143 | 148.5 | 144 | 146 | 149 | 154.0 | 150 | 151 | 154 | 159.5 | 156 | 158 | 161 | 166.3 | |
| 1000 | MBh | 29.6 | 30.0 | 30.9 | 32.2 | 29.4 | 29.8 | 30.6 | 32.0 | 28.6 | 29.0 | 29.9 | 31.2 | 27.3 | 27.7 | 28.6 | 29.9 | 25.7 | 26.1 | 27.0 | 28.3 | 24.3 | 24.7 | 25.6 | 26.9 |
| | S/T | 1.00 | 0.88 | 0.75 | 0.6 | 1.00 | 0.89 | 0.75 | 0.6 | 1.00 | 1.00 | 0.78 | 0.6 | 1.00 | 1.00 | 0.80 | 0.7 | 1.00 | 1.00 | 0.82 | 0.7 | 1.00 | 1.00 | 1.00 | 0.7 |
| | ΔT | 31 | 29 | 25 | 22 | 31 | 29 | 25 | 22 | 31 | 29 | 26 | 22 | 31 | 29 | 25 | 22 | 30 | 29 | 25 | 22 | 31 | 30 | 26 | 23 |
| | kW | 1.90 | 1.90 | 1.90 | 1.91 | 2.11 | 2.11 | 2.11 | 2.12 | 2.35 | 2.35 | 2.34 | 2.36 | 2.60 | 2.60 | 2.60 | 2.61 | 2.89 | 2.89 | 2.88 | 2.90 | 3.22 | 3.22 | 3.22 | 3.23 |
| | Amps | 6.7 | 6.7 | 6.7 | 6.7 | 7.6 | 7.6 | 7.6 | 7.7 | 8.7 | 8.7 | 8.7 | 8.8 | 9.9 | 9.9 | 9.9 | 9.9 | 11.2 | 11.2 | 11.2 | 11.2 | 12.7 | 12.7 | 12.7 | 12.8 |
| | Hi PR | 257 | 259 | 260 | 264.8 | 298 | 299 | 301 | 305.1 | 340 | 341 | 343 | 347.2 | 385 | 386 | 388 | 392.6 | 434 | 435 | 437 | 441.6 | 486 | 488 | 489 | 493.8 |
| Lo PR | 126 | 128 | 131 | 136.0 | 134 | 135 | 138 | 143.5 | 140 | 142 | 145 | 150.0 | 146 | 147 | 150 | 155.6 | 151 | 153 | 156 | 161.0 | 158 | 159 | 163 | 167.8 | |
| 1105 | MBh | 29.9 | 30.3 | 31.2 | 32.5 | 29.7 | 30.1 | 30.9 | 32.3 | 28.9 | 29.3 | 30.2 | 31.5 | 27.6 | 28.0 | 28.9 | 30.2 | 26.0 | 26.4 | 27.3 | 28.6 | 24.6 | 25.0 | 25.9 | 27.2 |
| | S/T | 1.00 | 0.92 | 0.79 | 0.7 | 1.00 | 1.00 | 0.80 | 0.7 | 1.00 | 1.00 | 0.82 | 0.7 | 1.00 | 1.00 | 0.84 | 0.7 | 1.00 | 1.00 | 0.86 | 0.7 | 1.00 | 1.00 | 1.00 | 0.8 |
| | ΔT | 30 | 28 | 25 | 21 | 30 | 28 | 25 | 21 | 30 | 28 | 25 | 21 | 30 | 28 | 25 | 21 | 30 | 28 | 24 | 21 | 31 | 29 | 25 | 22 |
| | kW | 1.91 | 1.91 | 1.90 | 1.9 | 2.12 | 2.12 | 2.11 | 2.1 | 2.36 | 2.35 | 2.35 | 2.4 | 2.61 | 2.61 | 2.60 | 2.6 | 2.89 | 2.89 | 2.89 | 2.9 | 3.23 | 3.23 | 3.22 | 3.2 |
| | Amps | 6.7 | 6.7 | 6.7 | 6.8 | 7.7 | 7.7 | 7.7 | 7.7 | 8.8 | 8.7 | 8.7 | 8.8 | 9.9 | 9.9 | 9.9 | 10.0 | 11.2 | 11.2 | 11.2 | 11.3 | 12.8 | 12.7 | 12.7 | 12.8 |
| | Hi PR | 259 | 260 | 262 | 266.5 | 299 | 300 | 302 | 306.7 | 342 | 343 | 344 | 348.9 | 387 | 388 | 390 | 394.3 | 436 | 437 | 439 | 443.2 | 488 | 489 | 491 | 495.5 |
| Lo PR | 127 | 129 | 132 | 137.4 | 135 | 136 | 140 | 144.9 | 142 | 143 | 146 | 151.4 | 147 | 149 | 152 | 157.0 | 153 | 154 | 157 | 162.4 | 159 | 161 | 164 | 169.2 | |

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects AHRI conditions
 kW = Total system power
 Amps = outdoor unit amps (comp. +fan)

| IDB | | OUTDOOR AMBIENT TEMPERATURE | | | | | | | | | | | | ENTERING INDOOR WET BULB TEMPERATURE | | | | | | | | | | | | |
|-----------|-------|-----------------------------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|--------------------------------------|-------------|-------|-------|------|------|-------|-------|------|------|-------|-------|------|
| | | 65 | | | | 75 | | | | 85 | | | | 95 | | | | 105 | | | | 115 | | | | |
| | | AIRFLOW | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 |
| 70 | 1050 | MBh | 34.6 | 35.1 | 36.2 | - | 34.3 | 34.8 | 35.9 | - | 33.4 | 33.9 | 34.9 | - | 31.9 | 32.3 | 33.4 | - | 29.9 | 30.4 | 31.5 | - | 28.2 | 28.7 | 29.7 | - |
| | S/T | 0.58 | 0.50 | 0.36 | - | 0.58 | 0.51 | 0.37 | - | 0.61 | 0.53 | 0.40 | - | 0.63 | 0.55 | 0.42 | - | 1.00 | 0.57 | 0.44 | - | 1.00 | 0.63 | 0.49 | - | |
| | ΔT | 21 | 19 | 16 | - | 21 | 19 | 16 | - | 21 | 19 | 16 | - | 21 | 19 | 16 | - | 21 | 19 | 15 | - | 22 | 20 | 17 | - | |
| | kW | 2.21 | 2.21 | 2.21 | - | 2.47 | 2.47 | 2.46 | - | 2.75 | 2.75 | 2.75 | - | 3.06 | 3.06 | 3.06 | - | 3.41 | 3.41 | 3.40 | - | 3.82 | 3.81 | 3.81 | - | |
| | Amps | 7.9 | 7.9 | 7.8 | - | 9.0 | 9.0 | 9.0 | - | 10.3 | 10.3 | 10.3 | - | 11.8 | 11.8 | 11.7 | - | 13.3 | 13.3 | 13.3 | - | 15.2 | 15.2 | 15.2 | - | |
| | Hi PR | 256 | 257 | 259 | - | 296 | 297 | 299 | - | 339 | 340 | 341 | - | 384 | 385 | 387 | - | 433 | 435 | 436 | - | 486 | 487 | 489 | - | |
| | Lo PR | 121 | 123 | 126 | - | 129 | 130 | 133 | - | 135 | 137 | 140 | - | 141 | 142 | 145 | - | 146 | 148 | 151 | - | 153 | 155 | 158 | - | |
| | MBh | 35.3 | 35.7 | 36.8 | - | 34.9 | 35.4 | 36.5 | - | 34.0 | 34.5 | 35.6 | - | 32.5 | 33.0 | 34.0 | - | 30.6 | 31.0 | 32.1 | - | 28.8 | 29.3 | 30.3 | - | |
| | S/T | 0.67 | 0.59 | 0.46 | - | 0.67 | 0.60 | 0.46 | - | 0.70 | 0.62 | 0.49 | - | 1.00 | 0.64 | 0.51 | - | 1.00 | 0.67 | 0.53 | - | 1.00 | 0.72 | 0.58 | - | |
| | ΔT | 19 | 18 | 14 | - | 19 | 17 | 14 | - | 20 | 18 | 14 | - | 19 | 17 | 14 | - | 19 | 17 | 14 | - | 20 | 18 | 15 | - | |
| kW | 2.23 | 2.23 | 2.23 | - | 2.49 | 2.49 | 2.48 | - | 2.77 | 2.77 | 2.77 | - | 3.08 | 3.08 | 3.08 | - | 3.43 | 3.43 | 3.42 | - | 3.83 | 3.83 | 3.83 | - | | |
| Amps | 8.0 | 8.0 | 7.9 | - | 9.1 | 9.1 | 9.1 | - | 10.4 | 10.4 | 10.4 | - | 11.9 | 11.8 | 11.8 | - | 13.4 | 13.4 | 13.4 | - | 15.3 | 15.3 | 15.3 | - | | |
| Hi PR | 259 | 260 | 262 | - | 299 | 300 | 302 | - | 342 | 343 | 345 | - | 387 | 388 | 390 | - | 437 | 438 | 439 | - | 489 | 490 | 492 | - | | |
| Lo PR | 124 | 125 | 129 | - | 131 | 133 | 136 | - | 138 | 139 | 142 | - | 143 | 145 | 148 | - | 149 | 150 | 153 | - | 155 | 157 | 160 | - | | |
| MBh | 35.5 | 36.0 | 37.0 | - | 35.2 | 35.7 | 36.7 | - | 34.3 | 34.8 | 35.8 | - | 32.7 | 33.2 | 34.3 | - | 30.8 | 31.3 | 32.4 | - | 29.1 | 29.6 | 30.6 | - | | |
| S/T | 0.69 | 0.61 | 0.48 | - | 0.69 | 0.62 | 0.48 | - | 0.72 | 0.64 | 0.51 | - | 1.00 | 0.66 | 0.53 | - | 1.00 | 0.69 | 0.55 | - | 1.00 | 0.74 | 0.60 | - | | |
| ΔT | 19 | 17 | 13 | - | 19 | 17 | 13 | - | 19 | 17 | 14 | - | 19 | 17 | 13 | - | 19 | 17 | 13 | - | 20 | 18 | 14 | - | | |
| kW | 2.24 | 2.24 | 2.23 | - | 2.49 | 2.49 | 2.49 | - | 2.78 | 2.78 | 2.77 | - | 3.09 | 3.09 | 3.08 | - | 3.43 | 3.43 | 3.43 | - | 3.84 | 3.84 | 3.83 | - | | |
| Amps | 8.0 | 8.0 | 8.0 | - | 9.2 | 9.1 | 9.1 | - | 10.5 | 10.5 | 10.4 | - | 11.9 | 11.9 | 11.8 | - | 13.5 | 13.5 | 13.4 | - | 15.3 | 15.3 | 15.3 | - | | |
| Hi PR | 260 | 261 | 263 | - | 300 | 301 | 303 | - | 343 | 344 | 346 | - | 388 | 389 | 391 | - | 438 | 439 | 440 | - | 490 | 491 | 493 | - | | |
| Lo PR | 125 | 126 | 129 | - | 132 | 134 | 137 | - | 139 | 140 | 143 | - | 144 | 146 | 149 | - | 150 | 151 | 154 | - | 156 | 158 | 161 | - | | |
| 75 | 1050 | MBh | 34.7 | 35.2 | 36.2 | 37.8 | 34.3 | 34.8 | 35.9 | 37.5 | 33.4 | 33.9 | 35.0 | 36.6 | 31.9 | 32.4 | 33.4 | 35.0 | 30.0 | 30.5 | 31.5 | 33.1 | 28.2 | 28.7 | 29.8 | 31.3 |
| | S/T | 0.71 | 0.63 | 0.49 | 0.4 | 0.71 | 0.64 | 0.50 | 0.4 | 0.80 | 0.73 | 0.59 | 0.4 | 0.5 | 1.00 | 0.68 | 0.54 | 0.4 | 1.00 | 0.70 | 0.57 | 0.4 | 1.00 | 0.75 | 0.62 | 0.5 |
| | ΔT | 25 | 23 | 20 | 16 | 25 | 23 | 20 | 16 | 24 | 22 | 18 | 14 | 15 | 24 | 23 | 20 | 16 | 25 | 23 | 20 | 16 | 26 | 24 | 21 | 17 |
| | kW | 2.21 | 2.21 | 2.20 | 2.2 | 2.47 | 2.47 | 2.46 | 2.5 | 2.75 | 2.75 | 2.75 | 2.8 | 3.06 | 3.06 | 3.06 | 3.1 | 3.41 | 3.41 | 3.40 | 3.4 | 3.81 | 3.81 | 3.81 | 3.8 | |
| | Amps | 7.9 | 7.9 | 7.8 | 7.9 | 9.0 | 9.0 | 9.0 | 9.1 | 10.3 | 10.3 | 10.3 | 10.4 | 11.8 | 11.7 | 11.7 | 11.8 | 13.3 | 13.3 | 13.3 | 13.4 | 15.2 | 15.2 | 15.2 | 15.3 | |
| | Hi PR | 256 | 257 | 259 | 263.3 | 296 | 297 | 299 | 303.7 | 339 | 340 | 342 | 346.2 | 384 | 386 | 387 | 391.8 | 434 | 435 | 437 | 441.1 | 486 | 487 | 489 | 493.6 | |
| | Lo PR | 121 | 123 | 126 | 131.3 | 129 | 130 | 134 | 138.7 | 135 | 137 | 140 | 145.2 | 141 | 142 | 146 | 150.7 | 146 | 148 | 151 | 156.1 | 153 | 155 | 158 | 162.9 | |
| | MBh | 35.3 | 35.8 | 36.8 | 38.4 | 35.0 | 35.5 | 36.5 | 38.1 | 34.1 | 34.5 | 35.6 | 37.2 | 32.5 | 33.0 | 34.0 | 35.6 | 30.6 | 31.1 | 32.1 | 33.7 | 28.8 | 29.3 | 30.4 | 32.0 | |
| | S/T | 0.80 | 0.72 | 0.59 | 0.4 | 0.80 | 0.73 | 0.59 | 0.4 | 0.80 | 0.75 | 0.62 | 0.5 | 1.00 | 0.77 | 0.64 | 0.5 | 1.00 | 0.79 | 0.66 | 0.5 | 1.00 | 1.00 | 0.71 | 0.6 | |
| | ΔT | 24 | 22 | 18 | 14 | 24 | 22 | 18 | 14 | 24 | 22 | 18 | 15 | 24 | 22 | 18 | 14 | 23 | 21 | 18 | 14 | 24 | 23 | 19 | 15 | |
| kW | 2.23 | 2.23 | 2.22 | 2.24 | 2.49 | 2.48 | 2.48 | 2.50 | 2.77 | 2.77 | 2.77 | 2.79 | 3.08 | 3.08 | 3.08 | 3.09 | 3.43 | 3.43 | 3.42 | 3.44 | 3.83 | 3.83 | 3.83 | 3.85 | | |
| Amps | 7.9 | 7.9 | 7.9 | 8.0 | 9.1 | 9.1 | 9.1 | 9.2 | 10.4 | 10.4 | 10.4 | 10.5 | 11.8 | 11.8 | 11.8 | 11.9 | 13.4 | 13.4 | 13.4 | 13.5 | 15.3 | 15.3 | 15.3 | 15.3 | | |
| Hi PR | 259 | 260 | 262 | 266.3 | 299 | 301 | 302 | 306.8 | 342 | 343 | 345 | 349.2 | 388 | 389 | 390 | 394.9 | 437 | 438 | 440 | 444.1 | 489 | 490 | 492 | 496.7 | | |
| Lo PR | 124 | 125 | 129 | 133.7 | 131 | 133 | 136 | 141.2 | 138 | 139 | 142 | 147.7 | 143 | 145 | 148 | 153.2 | 149 | 150 | 153 | 158.6 | 156 | 157 | 160 | 165.3 | | |
| MBh | 35.5 | 36.0 | 37.1 | 38.7 | 35.2 | 35.7 | 36.8 | 38.3 | 34.3 | 34.8 | 35.8 | 37.4 | 32.8 | 33.2 | 34.3 | 35.9 | 30.8 | 31.3 | 32.4 | 34.0 | 29.1 | 29.6 | 30.6 | 32.2 | | |
| S/T | 0.82 | 0.74 | 0.61 | 0.5 | 0.82 | 0.75 | 0.61 | 0.5 | 0.80 | 0.77 | 0.64 | 0.5 | 1.00 | 0.79 | 0.66 | 0.5 | 1.00 | 0.81 | 0.68 | 0.5 | 1.00 | 1.00 | 0.73 | 0.6 | | |
| ΔT | 23 | 21 | 18 | 14 | 23 | 21 | 18 | 14 | 23 | 21 | 18 | 14 | 23 | 21 | 18 | 14 | 23 | 21 | 17 | 14 | 24 | 22 | 19 | 15 | | |
| kW | 2.24 | 2.23 | 2.23 | 2.2 | 2.49 | 2.49 | 2.49 | 2.5 | 2.78 | 2.78 | 2.77 | 2.8 | 3.09 | 3.09 | 3.08 | 3.1 | 3.43 | 3.43 | 3.43 | 3.4 | 3.84 | 3.84 | 3.83 | 3.9 | | |
| Amps | 8.0 | 8.0 | 7.9 | 8.0 | 9.1 | 9.1 | 9.1 | 9.2 | 10.5 | 10.4 | 10.4 | 10.5 | 11.9 | 11.9 | 11.9 | 11.9 | 13.5 | 13.4 | 13.4 | 13.5 | 15.3 | 15.3 | 15.3 | 15.4 | | |
| Hi PR | 260 | 261 | 263 | 267.4 | 300 | 302 | 303 | 307.9 | 343 | 344 | 346 | 350.3 | 389 | 390 | 391 | 396.0 | 438 | 439 | 441 | 445.2 | 490 | 491 | 493 | 497.7 | | |
| Lo PR | 125 | 126 | 130 | 134.7 | 132 | 134 | 137 | 142.1 | 139 | 140 | 143 | 148.6 | 144 | 146 | 149 | 154.1 | 150 | 151 | 154 | 159.5 | 156 | 158 | 161 | 166.3 | | |

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects ACCA (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp.+fan)

EXPANDED COOLING DATA — DX3SQN3610A*/CA*FA4226*6A* (CONT.)

| IDB | | OUTDOOR AMBIENT TEMPERATURE | | | | | | | | | | | | 105 | | | | | | | | | | | | 115 | | | | | | | | | | | |
|-------------|-------|-----------------------------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|------|-------------|-------------|-------|------|------|-------|-------|------|------|-------|-------|-----|----|--|--|--|--|--|--|--|--|--|--|
| | | 75 | | | | | | 85 | | | | | | 95 | | | | | | 105 | | | | | | 115 | | | | | | | | | | | |
| | | AIRFLOW | | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | | | | | | | | | | |
| 1050 | MBh | 34.8 | 35.3 | 36.4 | 38.0 | 34.5 | 35.0 | 36.1 | 37.6 | 33.6 | 34.1 | 35.1 | 36.7 | 32.1 | 32.5 | 33.6 | 35.2 | 30.1 | 30.6 | 31.7 | 33.3 | 28.4 | 28.9 | 29.9 | 31.5 | | | | | | | | | | | | |
| | S/T | 0.83 | 0.76 | 0.62 | 0.5 | 1.00 | 0.76 | 0.63 | 0.5 | 1.00 | 0.79 | 0.65 | 0.5 | 1.00 | 0.81 | 0.67 | 0.5 | 1.00 | 1.00 | 0.69 | 0.5 | 1.00 | 1.00 | 0.74 | 0.6 | | | | | | | | | | | | |
| | ΔT | 30 | 28 | 24 | 20 | 29 | 28 | 24 | 21 | 30 | 28 | 24 | 21 | 29 | 28 | 24 | 20 | 29 | 27 | 24 | 20 | 30 | 28 | 25 | 21 | | | | | | | | | | | | |
| | kW | 2.21 | 2.21 | 2.21 | 2.2 | 2.47 | 2.47 | 2.46 | 2.5 | 2.75 | 2.75 | 2.75 | 2.8 | 3.06 | 3.06 | 3.06 | 3.1 | 3.41 | 3.41 | 3.40 | 3.4 | 3.81 | 3.81 | 3.81 | 3.8 | | | | | | | | | | | | |
| | Amps | 7.9 | 7.9 | 7.8 | 7.9 | 9.0 | 9.0 | 9.0 | 9.1 | 10.3 | 10.3 | 10.3 | 10.4 | 11.8 | 11.8 | 11.7 | 11.8 | 13.3 | 13.3 | 13.3 | 13.4 | 15.2 | 15.2 | 15.2 | 15.3 | | | | | | | | | | | | |
| | Hi PR | 256 | 257 | 259 | 263.7 | 297 | 298 | 300 | 304.2 | 339 | 340 | 342 | 346.6 | 385 | 386 | 388 | 392.3 | 434 | 435 | 437 | 441.5 | 487 | 488 | 490 | 494.1 | | | | | | | | | | | | |
| | Lo PR | 122 | 124 | 127 | 131.8 | 129 | 131 | 134 | 139.2 | 136 | 137 | 141 | 145.7 | 141 | 143 | 146 | 151.2 | 147 | 148 | 151 | 156.6 | 154 | 155 | 158 | 163.4 | | | | | | | | | | | | |
| | MBh | 35.5 | 35.9 | 37.0 | 38.6 | 35.1 | 35.6 | 36.7 | 38.3 | 34.2 | 34.7 | 35.8 | 37.4 | 32.7 | 33.2 | 34.2 | 35.8 | 30.8 | 31.2 | 32.3 | 33.9 | 29.0 | 29.5 | 30.5 | 32.1 | | | | | | | | | | | | |
| | S/T | 1.00 | 0.85 | 0.71 | 0.6 | 1.00 | 0.85 | 0.72 | 0.6 | 1.00 | 0.88 | 0.74 | 0.6 | 1.00 | 1.00 | 0.76 | 0.6 | 1.00 | 1.00 | 0.78 | 0.6 | 1.00 | 1.00 | 0.84 | 0.7 | | | | | | | | | | | | |
| | ΔT | 28 | 26 | 22 | 19 | 28 | 26 | 22 | 19 | 28 | 26 | 23 | 19 | 28 | 26 | 22 | 19 | 28 | 26 | 22 | 18 | 29 | 27 | 23 | 20 | | | | | | | | | | | | |
| kW | 2.23 | 2.23 | 2.23 | 2.25 | 2.49 | 2.49 | 2.48 | 2.50 | 2.77 | 2.77 | 2.77 | 2.79 | 3.08 | 3.08 | 3.08 | 3.10 | 3.43 | 3.43 | 3.42 | 3.44 | 3.83 | 3.83 | 3.83 | 3.85 | | | | | | | | | | | | | |
| Amps | 8.0 | 7.9 | 7.9 | 8.0 | 9.1 | 9.1 | 9.1 | 9.2 | 10.4 | 10.4 | 10.4 | 10.5 | 11.8 | 11.8 | 11.8 | 11.9 | 13.4 | 13.4 | 13.4 | 13.5 | 15.3 | 15.3 | 15.3 | 15.3 | | | | | | | | | | | | | |
| Hi PR | 259 | 261 | 262 | 266.8 | 300 | 301 | 303 | 307.3 | 342 | 343 | 345 | 349.7 | 388 | 389 | 391 | 395.4 | 437 | 438 | 440 | 444.6 | 490 | 491 | 493 | 497.1 | | | | | | | | | | | | | |
| Lo PR | 124 | 126 | 129 | 134.3 | 132 | 133 | 137 | 141.7 | 138 | 140 | 143 | 148.2 | 144 | 145 | 149 | 153.7 | 149 | 151 | 154 | 159.1 | 156 | 158 | 161 | 165.9 | | | | | | | | | | | | | |
| MBh | 35.7 | 36.2 | 37.2 | 38.8 | 35.4 | 35.9 | 36.9 | 38.5 | 34.5 | 35.0 | 36.0 | 37.6 | 32.9 | 33.4 | 34.5 | 36.1 | 31.0 | 31.5 | 32.6 | 34.1 | 29.3 | 29.8 | 30.8 | 32.4 | | | | | | | | | | | | | |
| S/T | 1.00 | 0.87 | 0.73 | 0.6 | 1.00 | 0.87 | 0.74 | 0.6 | 1.00 | 0.90 | 0.76 | 0.6 | 1.00 | 1.00 | 0.78 | 0.6 | 1.00 | 1.00 | 0.80 | 0.7 | 1.00 | 1.00 | 0.86 | 0.7 | | | | | | | | | | | | | |
| ΔT | 27 | 25 | 22 | 18 | 27 | 25 | 22 | 18 | 28 | 26 | 22 | 18 | 27 | 25 | 22 | 18 | 27 | 25 | 22 | 18 | 28 | 26 | 23 | 19 | | | | | | | | | | | | | |
| kW | 2.24 | 2.24 | 2.23 | 2.3 | 2.49 | 2.49 | 2.49 | 2.5 | 2.78 | 2.78 | 2.77 | 2.8 | 3.09 | 3.09 | 3.08 | 3.1 | 3.43 | 3.43 | 3.43 | 3.4 | 3.84 | 3.84 | 3.83 | 3.9 | | | | | | | | | | | | | |
| Amps | 8.0 | 8.0 | 8.0 | 8.0 | 9.2 | 9.1 | 9.1 | 9.2 | 10.5 | 10.5 | 10.4 | 10.5 | 11.9 | 11.9 | 11.8 | 11.9 | 13.5 | 13.4 | 13.4 | 13.5 | 15.3 | 15.3 | 15.3 | 15.4 | | | | | | | | | | | | | |
| Hi PR | 260 | 262 | 263 | 267.9 | 301 | 302 | 304 | 308.4 | 343 | 344 | 346 | 350.8 | 389 | 390 | 392 | 396.4 | 438 | 439 | 441 | 445.7 | 491 | 492 | 494 | 498.2 | | | | | | | | | | | | | |
| Lo PR | 125 | 127 | 130 | 135.2 | 133 | 134 | 137 | 142.7 | 139 | 141 | 144 | 149.2 | 145 | 146 | 149 | 154.7 | 150 | 152 | 155 | 160.1 | 157 | 159 | 162 | 166.8 | | | | | | | | | | | | | |

| IDB | | OUTDOOR AMBIENT TEMPERATURE | | | | | | | | | | | | 105 | | | | | | | | | | | | 115 | | | | | | | | | | | |
|-------------|-------|-----------------------------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|-----|----|--|--|--|--|--|--|--|--|--|--|
| | | 75 | | | | | | 85 | | | | | | 95 | | | | | | 105 | | | | | | 115 | | | | | | | | | | | |
| | | AIRFLOW | | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | | | | | | | | | | |
| 1050 | MBh | 35.4 | 35.9 | 37.0 | 38.6 | 35.1 | 35.6 | 36.6 | 38.2 | 34.2 | 34.7 | 35.7 | 37.3 | 32.6 | 33.1 | 34.2 | 35.8 | 30.7 | 31.2 | 32.3 | 33.9 | 29.0 | 29.5 | 30.5 | 32.1 | | | | | | | | | | | | |
| | S/T | 1.00 | 0.86 | 0.72 | 0.6 | 1.00 | 0.86 | 0.73 | 0.6 | 1.00 | 1.00 | 0.75 | 0.6 | 1.00 | 1.00 | 0.77 | 0.6 | 1.00 | 1.00 | 0.79 | 0.7 | 1.00 | 1.00 | 1.00 | 0.7 | | | | | | | | | | | | |
| | ΔT | 33 | 31 | 28 | 24 | 33 | 31 | 28 | 24 | 33 | 32 | 28 | 24 | 33 | 31 | 28 | 24 | 33 | 31 | 27 | 24 | 34 | 32 | 29 | 25 | | | | | | | | | | | | |
| | kW | 2.22 | 2.22 | 2.21 | 2.2 | 2.47 | 2.47 | 2.47 | 2.5 | 2.76 | 2.76 | 2.75 | 2.8 | 3.07 | 3.07 | 3.06 | 3.1 | 3.41 | 3.41 | 3.41 | 3.4 | 3.82 | 3.82 | 3.81 | 3.8 | | | | | | | | | | | | |
| | Amps | 7.9 | 7.9 | 7.9 | 7.9 | 9.1 | 9.1 | 9.1 | 9.1 | 10.4 | 10.4 | 10.3 | 10.4 | 11.8 | 11.8 | 11.8 | 11.8 | 13.4 | 13.4 | 13.4 | 13.4 | 15.2 | 15.2 | 15.2 | 15.3 | | | | | | | | | | | | |
| | Hi PR | 258 | 259 | 260 | 264.9 | 298 | 299 | 301 | 305.4 | 340 | 342 | 343 | 347.8 | 386 | 387 | 389 | 393.5 | 435 | 436 | 438 | 442.7 | 488 | 489 | 491 | 495.3 | | | | | | | | | | | | |
| | Lo PR | 124 | 125 | 128 | 133.6 | 131 | 133 | 136 | 141.1 | 138 | 139 | 142 | 147.6 | 143 | 145 | 148 | 153.1 | 149 | 150 | 153 | 158.5 | 155 | 157 | 160 | 165.2 | | | | | | | | | | | | |
| | MBh | 36.0 | 36.5 | 37.6 | 39.2 | 35.7 | 36.2 | 37.3 | 38.8 | 34.8 | 35.3 | 36.3 | 37.9 | 33.3 | 33.7 | 34.8 | 36.4 | 31.3 | 31.8 | 32.9 | 34.5 | 29.6 | 30.1 | 31.1 | 32.7 | | | | | | | | | | | | |
| | S/T | 1.00 | 0.95 | 0.81 | 0.7 | 1.00 | 0.96 | 0.82 | 0.7 | 1.00 | 1.00 | 0.84 | 0.7 | 1.00 | 1.00 | 0.86 | 0.7 | 1.00 | 1.00 | 0.89 | 0.7 | 1.00 | 1.00 | 1.00 | 0.8 | | | | | | | | | | | | |
| | ΔT | 32 | 30 | 26 | 22 | 32 | 30 | 26 | 22 | 32 | 30 | 26 | 23 | 32 | 30 | 26 | 22 | 31 | 29 | 26 | 22 | 32 | 31 | 27 | 23 | | | | | | | | | | | | |
| kW | 2.24 | 2.23 | 2.23 | 2.25 | 2.49 | 2.49 | 2.49 | 2.51 | 2.78 | 2.78 | 2.77 | 2.79 | 3.09 | 3.09 | 3.08 | 3.10 | 3.43 | 3.43 | 3.43 | 3.45 | 3.84 | 3.84 | 3.83 | 3.85 | | | | | | | | | | | | | |
| Amps | 8.0 | 8.0 | 7.9 | 8.0 | 9.1 | 9.1 | 9.1 | 9.2 | 10.5 | 10.4 | 10.4 | 10.5 | 11.9 | 11.9 | 11.8 | 11.9 | 13.5 | 13.4 | 13.4 | 13.5 | 15.3 | 15.3 | 15.3 | 15.4 | | | | | | | | | | | | | |
| Hi PR | 261 | 262 | 264 | 268.0 | 301 | 302 | 304 | 308.5 | 344 | 345 | 346 | 350.9 | 389 | 390 | 392 | 396.6 | 438 | 440 | 441 | 445.8 | 491 | 492 | 494 | 498.3 | | | | | | | | | | | | | |
| Lo PR | 126 | 128 | 131 | 136.1 | 134 | 135 | 138 | 143.5 | 140 | 142 | 145 | 150.0 | 146 | 147 | 150 | 155.5 | 151 | 153 | 156 | 160.9 | 158 | 159 | 162 | 167.7 | | | | | | | | | | | | | |
| MBh | 36.3 | 36.8 | 37.8 | 39.4 | 36.0 | 36.5 | 37.5 | 39.1 | 35.1 | 35.6 | 36.6 | 38.2 | 33.5 | 34.0 | 35.1 | 36.6 | 31.6 | 32.1 | 33.1 | 34.7 | 29.9 | 30.4 | 31.4 | 33.0 | | | | | | | | | | | | | |
| S/T | 1.00 | 0.97 | 0.83 | 0.7 | 1.00 | 1.00 | 0.84 | 0.7 | 1.00 | 1.00 | 0.86 | 0.7 | 1.00 | 1.00 | 0.88 | 0.7 | 1.00 | 1.00 | 0.91 | 0.8 | 1.00 | 1.00 | 1.00 | 0.8 | | | | | | | | | | | | | |
| ΔT | 31 | 29 | 26 | 22 | 31 | 29 | 26 | 22 | 31 | 29 | 26 | 22 | 31 | 29 | 26 | 22 | 31 | 29 | 25 | 22 | 32 | 30 | 26 | 23 | | | | | | | | | | | | | |
| kW | 2.24 | 2.24 | 2.24 | 2.3 | 2.50 | 2.50 | 2.49 | 2.5 | 2.78 | 2.78 | 2.78 | 2.8 | 3.09 | 3.09 | 3.09 | 3.1 | 3.44 | 3.44 | 3.43 | 3.5 | 3.84 | 3.84 | 3.84 | 3.9 | | | | | | | | | | | | | |
| Amps | 8.0 | 8.0 | 8.0 | 8.1 | 9.2 | 9.2 | 9.1 | 9.2 | 10.5 | 10.5 | 10.5 | 10.5 | 11.9 | 11.9 | 11.9 | 12.0 | 13.5 | 13.5 | 13.5 | 13.5 | 15.3 | 15.3 | 15.3 | 15.4 | | | | | | | | | | | | | |
| Hi PR | 262 | 263 | 265 | 269.1 | 302 | 303 | 305 | 309.6 | 345 | 346 | 347 | 352.0 | 390 | 391 | 393 | 397.6 | 439 | 441 | 442 | 446.9 | 492 | 493 | 495 | 499.4 | | | | | | | | | | | | | |
| Lo PR | 127 | 129 | 132 | 137.1 | 135 | 136 | 139 | 144.5 | 141 | 143 | 146 | 151.0 | 147 | 148 | 151 | 156.5 | 152 | 154 | 157 | 161.9 | 159 | 160 | 163 | 168.7 | | | | | | | | | | | | | |

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects AHRI conditions
 kW = Total system power
 Amps = outdoor unit amps (comp. + fan)

| IDB | | OUTDOOR AMBIENT TEMPERATURE | | | | | | | | | | | | ENTERING INDOOR WET BULB TEMPERATURE | | | | | | | | | | | |
|-----------|-------|-----------------------------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|--------------------------------------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|
| | | 65 | | | | 75 | | | | 85 | | | | 95 | | | | 105 | | | | 115 | | | |
| | | AIRFLOW | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 |
| 70 | M/Bh | 40.1 | 40.6 | 41.8 | - | 39.7 | 40.3 | 41.5 | - | 38.6 | 39.2 | 40.4 | - | 36.8 | 37.4 | 38.6 | - | 34.6 | 35.2 | 36.4 | - | 32.6 | 33.2 | 34.4 | - |
| | S/T | 0.58 | 0.50 | 0.37 | - | 0.58 | 0.51 | 0.37 | - | 0.61 | 0.53 | 0.40 | - | 0.63 | 0.55 | 0.42 | - | 1.00 | 0.57 | 0.44 | - | 1.00 | 0.62 | 0.49 | - |
| | ΔT | 21 | 19 | 16 | - | 21 | 19 | 15 | - | 21 | 19 | 16 | - | 21 | 19 | 15 | - | 21 | 19 | 15 | - | 22 | 20 | 16 | - |
| | kW | 2.55 | 2.55 | 2.54 | - | 2.85 | 2.84 | 2.84 | - | 3.18 | 3.18 | 3.17 | - | 3.54 | 3.54 | 3.53 | - | 3.94 | 3.94 | 3.94 | - | 4.42 | 4.42 | 4.41 | - |
| | Amps | 9.1 | 9.0 | 9.0 | - | 10.4 | 10.4 | 10.4 | - | 12.0 | 11.9 | 11.9 | - | 13.6 | 13.6 | 13.6 | - | 15.5 | 15.4 | 15.4 | - | 17.6 | 17.6 | 17.6 | - |
| | Hi PR | 264 | 266 | 267 | - | 306 | 307 | 309 | - | 350 | 351 | 353 | - | 397 | 398 | 400 | - | 448 | 449 | 451 | - | 502 | 504 | 505 | - |
| | Lo PR | 122 | 123 | 126 | - | 129 | 131 | 134 | - | 136 | 137 | 140 | - | 141 | 143 | 146 | - | 146 | 148 | 151 | - | 153 | 155 | 158 | - |
| | M/Bh | 40.7 | 41.3 | 42.5 | - | 40.4 | 40.9 | 42.1 | - | 39.3 | 39.9 | 41.1 | - | 37.5 | 38.1 | 39.3 | - | 35.3 | 35.9 | 37.1 | - | 33.3 | 33.8 | 35.0 | - |
| | S/T | 0.66 | 0.58 | 0.45 | - | 0.66 | 0.59 | 0.45 | - | 0.69 | 0.61 | 0.48 | - | 1.00 | 0.63 | 0.50 | - | 1.00 | 0.65 | 0.52 | - | 1.00 | 0.70 | 0.57 | - |
| | ΔT | 19 | 18 | 14 | - | 19 | 17 | 14 | - | 20 | 18 | 14 | - | 19 | 17 | 14 | - | 19 | 17 | 14 | - | 20 | 18 | 15 | - |
| | kW | 2.57 | 2.57 | 2.56 | - | 2.87 | 2.86 | 2.86 | - | 3.20 | 3.20 | 3.19 | - | 3.56 | 3.56 | 3.55 | - | 3.96 | 3.96 | 3.96 | - | 4.44 | 4.44 | 4.43 | - |
| | Amps | 9.2 | 9.1 | 9.1 | - | 10.5 | 10.5 | 10.5 | - | 12.0 | 12.0 | 12.0 | - | 13.7 | 13.7 | 13.7 | - | 15.5 | 15.5 | 15.5 | - | 17.7 | 17.7 | 17.7 | - |
| Hi PR | 267 | 269 | 270 | - | 309 | 310 | 312 | - | 353 | 354 | 356 | - | 400 | 401 | 403 | - | 451 | 452 | 454 | - | 505 | 507 | 508 | - | |
| Lo PR | 124 | 125 | 129 | - | 131 | 133 | 136 | - | 138 | 139 | 142 | - | 143 | 145 | 148 | - | 149 | 150 | 153 | - | 156 | 157 | 160 | - | |
| M/Bh | 41.1 | 41.7 | 42.9 | - | 40.7 | 41.3 | 42.5 | - | 39.7 | 40.3 | 41.5 | - | 37.9 | 38.5 | 39.7 | - | 35.7 | 36.2 | 37.4 | - | 33.7 | 34.2 | 35.4 | - | |
| S/T | 0.68 | 0.61 | 0.47 | - | 0.69 | 0.61 | 0.48 | - | 0.71 | 0.64 | 0.50 | - | 1.00 | 0.66 | 0.52 | - | 1.00 | 0.68 | 0.54 | - | 1.00 | 0.73 | 0.59 | - | |
| ΔT | 19 | 17 | 13 | - | 19 | 17 | 13 | - | 19 | 17 | 14 | - | 19 | 17 | 13 | - | 18 | 17 | 13 | - | 20 | 18 | 14 | - | |
| kW | 2.58 | 2.57 | 2.57 | - | 2.88 | 2.87 | 2.87 | - | 3.21 | 3.21 | 3.20 | - | 3.57 | 3.57 | 3.56 | - | 3.97 | 3.97 | 3.97 | - | 4.45 | 4.44 | 4.44 | - | |
| Amps | 9.2 | 9.2 | 9.2 | - | 10.6 | 10.5 | 10.5 | - | 12.1 | 12.1 | 12.1 | - | 13.7 | 13.7 | 13.7 | - | 15.6 | 15.6 | 15.5 | - | 17.7 | 17.7 | 17.7 | - | |
| Hi PR | 269 | 270 | 272 | - | 311 | 312 | 314 | - | 354 | 356 | 357 | - | 402 | 403 | 405 | - | 452 | 454 | 455 | - | 507 | 508 | 510 | - | |
| Lo PR | 125 | 127 | 130 | - | 133 | 134 | 137 | - | 139 | 141 | 144 | - | 145 | 146 | 149 | - | 150 | 151 | 155 | - | 157 | 158 | 161 | - | |
| 75 | M/Bh | 40.1 | 40.6 | 41.8 | 43.7 | 39.7 | 40.3 | 41.5 | 43.3 | 38.7 | 39.2 | 40.4 | 42.3 | 36.9 | 37.4 | 38.6 | 40.5 | 34.7 | 35.2 | 36.4 | 38.3 | 32.6 | 33.2 | 34.4 | 36.2 |
| | S/T | 0.70 | 0.63 | 0.49 | 0.4 | 0.71 | 0.63 | 0.50 | 0.4 | 1.00 | 0.66 | 0.52 | 0.4 | 1.00 | 0.68 | 0.54 | 0.4 | 1.00 | 0.70 | 0.57 | 0.4 | 1.00 | 1.00 | 0.62 | 0.5 |
| | ΔT | 25 | 23 | 20 | 16 | 25 | 23 | 20 | 16 | 25 | 23 | 20 | 16 | 25 | 23 | 20 | 16 | 25 | 23 | 19 | 16 | 26 | 24 | 21 | 17 |
| | kW | 2.55 | 2.54 | 2.54 | 2.6 | 2.84 | 2.84 | 2.84 | 2.9 | 3.18 | 3.18 | 3.17 | 3.2 | 3.54 | 3.54 | 3.53 | 3.6 | 3.94 | 3.94 | 3.93 | 4.0 | 4.42 | 4.41 | 4.41 | 4.4 |
| | Amps | 9.0 | 9.0 | 9.0 | 9.1 | 10.4 | 10.4 | 10.4 | 10.5 | 11.9 | 11.9 | 11.9 | 12.0 | 13.6 | 13.6 | 13.6 | 13.7 | 15.4 | 15.4 | 15.4 | 15.5 | 17.6 | 17.6 | 17.6 | 17.7 |
| | Hi PR | 265 | 266 | 268 | 272.3 | 306 | 308 | 310 | 314.1 | 350 | 351 | 353 | 358.0 | 398 | 399 | 401 | 405.1 | 448 | 450 | 451 | 456.0 | 503 | 504 | 506 | 510.3 |
| | Lo PR | 122 | 123 | 126 | 131.5 | 129 | 131 | 134 | 138.9 | 136 | 137 | 140 | 145.4 | 141 | 143 | 146 | 150.9 | 146 | 148 | 151 | 156.3 | 153 | 155 | 158 | 163.1 |
| | M/Bh | 40.7 | 41.3 | 42.5 | 44.3 | 40.4 | 40.9 | 42.1 | 44.0 | 39.3 | 39.9 | 41.1 | 42.9 | 37.5 | 38.1 | 39.3 | 41.1 | 35.3 | 35.9 | 37.1 | 38.9 | 33.3 | 33.9 | 35.1 | 36.9 |
| | S/T | 0.78 | 0.71 | 0.58 | 0.4 | 0.79 | 0.72 | 0.58 | 0.4 | 1.00 | 0.74 | 0.61 | 0.5 | 1.00 | 0.76 | 0.63 | 0.5 | 1.00 | 0.78 | 0.65 | 0.5 | 1.00 | 1.00 | 0.70 | 0.6 |
| | ΔT | 24 | 22 | 18 | 14 | 24 | 22 | 18 | 14 | 24 | 22 | 18 | 15 | 24 | 21 | 17 | 14 | 23 | 21 | 18 | 14 | 25 | 23 | 19 | 15 |
| | kW | 2.57 | 2.56 | 2.56 | 2.58 | 2.87 | 2.86 | 2.86 | 2.88 | 3.20 | 3.20 | 3.19 | 3.21 | 3.56 | 3.56 | 3.55 | 3.58 | 3.96 | 3.96 | 3.96 | 3.98 | 4.44 | 4.43 | 4.43 | 4.45 |
| | Amps | 9.1 | 9.1 | 9.1 | 9.2 | 10.5 | 10.5 | 10.5 | 10.6 | 12.0 | 12.0 | 12.0 | 12.1 | 13.7 | 13.7 | 13.7 | 13.8 | 15.5 | 15.5 | 15.5 | 15.6 | 17.7 | 17.7 | 17.7 | 17.8 |
| Hi PR | 268 | 269 | 271 | 275.2 | 309 | 311 | 312 | 317.1 | 353 | 354 | 356 | 360.9 | 400 | 402 | 403 | 408.1 | 451 | 452 | 454 | 459.0 | 506 | 507 | 509 | 513.3 | |
| Lo PR | 124 | 125 | 129 | 133.8 | 131 | 133 | 136 | 141.2 | 138 | 139 | 143 | 147.7 | 143 | 145 | 148 | 153.2 | 149 | 150 | 153 | 158.6 | 156 | 157 | 160 | 165.4 | |
| M/Bh | 41.1 | 41.7 | 42.9 | 44.7 | 40.8 | 41.3 | 42.5 | 44.4 | 39.7 | 40.3 | 41.5 | 43.3 | 37.9 | 38.5 | 39.7 | 41.5 | 35.7 | 36.3 | 37.5 | 39.3 | 33.7 | 34.3 | 35.5 | 37.3 | |
| S/T | 0.81 | 0.73 | 0.60 | 0.5 | 0.81 | 0.74 | 0.61 | 0.5 | 1.00 | 0.76 | 0.63 | 0.5 | 1.00 | 0.78 | 0.65 | 0.5 | 1.00 | 0.81 | 0.67 | 0.5 | 1.00 | 1.00 | 0.72 | 0.6 | |
| ΔT | 23 | 21 | 18 | 14 | 23 | 21 | 17 | 14 | 23 | 21 | 18 | 14 | 23 | 21 | 17 | 14 | 23 | 21 | 17 | 14 | 24 | 22 | 18 | 15 | |
| kW | 2.57 | 2.57 | 2.57 | 2.6 | 2.87 | 2.87 | 2.87 | 2.9 | 3.21 | 3.20 | 3.20 | 3.2 | 3.57 | 3.57 | 3.56 | 3.6 | 3.97 | 3.97 | 3.96 | 4.0 | 4.44 | 4.44 | 4.44 | 4.5 | |
| Amps | 9.2 | 9.2 | 9.1 | 9.3 | 10.6 | 10.5 | 10.5 | 10.6 | 12.1 | 12.1 | 12.0 | 12.1 | 13.7 | 13.7 | 13.7 | 13.8 | 15.6 | 15.6 | 15.5 | 15.6 | 17.7 | 17.7 | 17.7 | 17.8 | |
| Hi PR | 269 | 270 | 272 | 276.6 | 311 | 312 | 314 | 318.4 | 355 | 356 | 358 | 362.3 | 402 | 403 | 405 | 409.5 | 453 | 454 | 456 | 460.3 | 507 | 508 | 510 | 514.6 | |
| Lo PR | 125 | 127 | 130 | 135.0 | 133 | 134 | 137 | 142.4 | 139 | 141 | 144 | 148.9 | 145 | 146 | 149 | 154.4 | 150 | 152 | 155 | 159.8 | 157 | 158 | 161 | 166.6 | |

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects ACCA (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp.+fan)

| IDB | | OUTDOOR AMBIENT TEMPERATURE | | | | | | | | | | | | 105 | | | | | | | | | | | | 115 | | | | | | | | | | | |
|-----------|-------|--------------------------------------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|----|-----|--|--|--|--|--|
| | | 65 | | | | | | 75 | | | | | | 85 | | | | | | 95 | | | | | | 105 | | | | | | 115 | | | | | |
| | | AIRFLOW | | 59 | 63 | 67 | 71 | 59 | | 63 | 67 | 71 | 59 | | 63 | 67 | 71 | 59 | | 63 | 67 | 71 | 59 | | 63 | 67 | 71 | 59 | | 63 | 67 | 71 | | | | | |
| | | ENTERING INDOOR WET BULB TEMPERATURE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 80 | 1225 | MBh | 40.3 | 40.9 | 42.1 | 43.9 | 39.9 | 40.5 | 41.7 | 43.5 | 38.9 | 39.4 | 40.6 | 42.5 | 37.1 | 37.6 | 38.8 | 40.7 | 34.9 | 35.4 | 36.6 | 38.5 | 32.8 | 33.4 | 34.6 | 36.4 | 32.8 | 33.4 | 34.6 | 36.4 | | | | | | | |
| | | S/T | 0.83 | 0.75 | 0.62 | 0.5 | 1.00 | 0.78 | 0.65 | 0.5 | 1.00 | 0.80 | 0.67 | 0.5 | 1.00 | 0.80 | 0.67 | 0.5 | 1.00 | 1.00 | 0.69 | 0.5 | 1.00 | 1.00 | 0.74 | 0.6 | 1.00 | 1.00 | 0.74 | 0.6 | | | | | | | |
| | | ΔT | 29 | 27 | 24 | 20 | 29 | 27 | 24 | 20 | 30 | 28 | 24 | 20 | 29 | 27 | 24 | 20 | 29 | 27 | 24 | 20 | 30 | 28 | 25 | 21 | 30 | 28 | 25 | 21 | | | | | | | |
| | | kW | 2.55 | 2.54 | 2.54 | 2.6 | 2.85 | 2.84 | 2.84 | 2.9 | 3.18 | 3.18 | 3.17 | 3.2 | 3.54 | 3.54 | 3.53 | 3.6 | 3.94 | 3.94 | 3.94 | 4.0 | 4.42 | 4.41 | 4.41 | 4.4 | 4.42 | 4.41 | 4.41 | 4.4 | | | | | | | |
| | | Amps | 9.1 | 9.0 | 9.0 | 9.1 | 10.4 | 10.4 | 10.4 | 10.5 | 12.0 | 11.9 | 11.9 | 12.0 | 13.6 | 13.6 | 13.6 | 13.7 | 15.4 | 15.4 | 15.4 | 15.5 | 17.6 | 17.6 | 17.6 | 17.7 | 17.6 | 17.6 | 17.6 | 17.7 | | | | | | | |
| | | Hi PR | 265 | 266 | 268 | 272.8 | 307 | 308 | 310 | 314.6 | 351 | 352 | 354 | 358.4 | 398 | 399 | 401 | 405.6 | 449 | 450 | 452 | 456.5 | 503 | 504 | 506 | 510.8 | 503 | 504 | 506 | 510.8 | | | | | | | |
| | | Lo PR | 122 | 124 | 127 | 132.0 | 130 | 131 | 134 | 139.4 | 136 | 138 | 141 | 146.0 | 142 | 143 | 146 | 151.5 | 147 | 149 | 152 | 156.9 | 154 | 155 | 158 | 163.6 | 154 | 155 | 158 | 163.6 | | | | | | | |
| | | MBh | 40.9 | 41.5 | 42.7 | 44.5 | 40.6 | 41.2 | 42.4 | 44.2 | 39.5 | 40.1 | 41.3 | 43.1 | 37.7 | 38.3 | 39.5 | 41.3 | 35.5 | 36.1 | 37.3 | 39.1 | 33.5 | 34.1 | 35.3 | 37.1 | 33.5 | 34.1 | 35.3 | 37.1 | | | | | | | |
| | | S/T | 1.00 | 0.83 | 0.70 | 0.6 | 1.00 | 0.84 | 0.71 | 0.6 | 1.00 | 0.86 | 0.73 | 0.6 | 1.00 | 1.00 | 0.75 | 0.6 | 1.00 | 1.00 | 0.77 | 0.6 | 1.00 | 1.00 | 0.82 | 0.7 | 1.00 | 1.00 | 0.82 | 0.7 | | | | | | | |
| | | ΔT | 28 | 26 | 22 | 19 | 28 | 26 | 22 | 19 | 28 | 26 | 23 | 19 | 28 | 26 | 22 | 19 | 28 | 26 | 22 | 18 | 29 | 27 | 23 | 20 | 29 | 27 | 23 | 20 | | | | | | | |
| | | kW | 2.57 | 2.57 | 2.56 | 2.58 | 2.87 | 2.86 | 2.86 | 2.88 | 3.20 | 3.20 | 3.19 | 3.22 | 3.56 | 3.56 | 3.55 | 3.58 | 3.96 | 3.96 | 3.96 | 3.98 | 4.44 | 4.44 | 4.44 | 4.45 | 4.44 | 4.44 | 4.44 | 4.45 | | | | | | | |
| | | Amps | 9.2 | 9.1 | 9.1 | 9.2 | 10.5 | 10.5 | 10.5 | 10.6 | 12.0 | 12.0 | 12.0 | 12.1 | 13.7 | 13.7 | 13.7 | 13.8 | 15.5 | 15.5 | 15.5 | 15.6 | 17.7 | 17.7 | 17.7 | 17.8 | 17.7 | 17.7 | 17.7 | 17.8 | | | | | | | |
| | Hi PR | 268 | 269 | 271 | 275.7 | 310 | 311 | 313 | 317.6 | 354 | 355 | 357 | 361.4 | 401 | 402 | 404 | 408.6 | 452 | 453 | 455 | 459.5 | 506 | 507 | 509 | 513.8 | 506 | 507 | 509 | 513.8 | | | | | | | | |
| | Lo PR | 124 | 126 | 129 | 134.3 | 132 | 133 | 137 | 141.7 | 138 | 140 | 143 | 148.2 | 144 | 145 | 149 | 153.7 | 149 | 151 | 154 | 159.1 | 156 | 158 | 161 | 165.9 | 156 | 158 | 161 | 165.9 | | | | | | | | |
| | MBh | 41.3 | 41.9 | 43.1 | 44.9 | 41.0 | 41.5 | 42.7 | 44.6 | 39.9 | 40.5 | 41.7 | 43.5 | 38.1 | 38.7 | 39.9 | 41.7 | 35.9 | 36.5 | 37.7 | 39.5 | 33.9 | 34.5 | 35.7 | 37.5 | 33.9 | 34.5 | 35.7 | 37.5 | | | | | | | | |
| | S/T | 1.00 | 0.86 | 0.72 | 0.6 | 1.00 | 0.86 | 0.73 | 0.6 | 1.00 | 0.89 | 0.75 | 0.6 | 1.00 | 1.00 | 0.77 | 0.6 | 1.00 | 1.00 | 0.80 | 0.7 | 1.00 | 1.00 | 0.85 | 0.7 | 1.00 | 1.00 | 0.85 | 0.7 | | | | | | | | |
| | ΔT | 27 | 25 | 22 | 18 | 27 | 25 | 22 | 18 | 27 | 26 | 22 | 18 | 27 | 25 | 22 | 18 | 27 | 25 | 21 | 18 | 28 | 26 | 23 | 19 | 28 | 26 | 23 | 19 | | | | | | | | |
| | kW | 2.58 | 2.57 | 2.57 | 2.6 | 2.88 | 2.87 | 2.87 | 2.9 | 3.21 | 3.21 | 3.20 | 3.2 | 3.57 | 3.57 | 3.56 | 3.6 | 3.97 | 3.97 | 3.97 | 4.0 | 4.45 | 4.44 | 4.44 | 4.5 | 4.45 | 4.44 | 4.44 | 4.5 | | | | | | | | |
| | Amps | 9.2 | 9.2 | 9.2 | 9.3 | 10.6 | 10.5 | 10.5 | 10.6 | 12.1 | 12.1 | 12.0 | 12.2 | 13.7 | 13.7 | 13.7 | 13.8 | 15.6 | 15.6 | 15.5 | 15.7 | 17.7 | 17.7 | 17.7 | 17.8 | 17.7 | 17.7 | 17.7 | 17.8 | | | | | | | | |
| | Hi PR | 269 | 271 | 272 | 277.1 | 311 | 312 | 314 | 318.9 | 355 | 356 | 358 | 362.8 | 402 | 403 | 405 | 410.0 | 453 | 454 | 456 | 460.8 | 507 | 509 | 511 | 515.1 | 507 | 509 | 511 | 515.1 | | | | | | | | |
| | Lo PR | 126 | 127 | 130 | 135.5 | 133 | 135 | 138 | 143.0 | 140 | 141 | 144 | 149.5 | 145 | 147 | 150 | 155.0 | 151 | 152 | 155 | 160.4 | 157 | 159 | 162 | 167.1 | 157 | 159 | 162 | 167.1 | | | | | | | | |

| IDB | | OUTDOOR AMBIENT TEMPERATURE | | | | | | | | | | | | 105 | | | | | | | | | | | | 115 | | | | | | | | | | | |
|-----------|-------|--------------------------------------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|----|-----|--|--|--|--|--|
| | | 65 | | | | | | 75 | | | | | | 85 | | | | | | 95 | | | | | | 105 | | | | | | 115 | | | | | |
| | | AIRFLOW | | 59 | 63 | 67 | 71 | 59 | | 63 | 67 | 71 | 59 | | 63 | 67 | 71 | 59 | | 63 | 67 | 71 | 59 | | 63 | 67 | 71 | 59 | | 63 | 67 | 71 | | | | | |
| | | ENTERING INDOOR WET BULB TEMPERATURE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 85 | 1225 | MBh | 41.0 | 41.5 | 42.7 | 44.6 | 40.6 | 41.2 | 42.4 | 44.2 | 39.6 | 40.1 | 41.3 | 43.2 | 37.7 | 38.3 | 39.5 | 41.3 | 35.5 | 36.1 | 37.3 | 39.1 | 33.5 | 34.1 | 35.3 | 37.1 | 33.5 | 34.1 | 35.3 | 37.1 | | | | | | | |
| | | S/T | 1.00 | 0.85 | 0.72 | 0.6 | 1.00 | 0.86 | 0.72 | 0.6 | 1.00 | 1.00 | 0.75 | 0.6 | 1.00 | 1.00 | 0.77 | 0.6 | 1.00 | 1.00 | 0.79 | 0.6 | 1.00 | 1.00 | 1.00 | 0.7 | 1.00 | 1.00 | 1.00 | 0.7 | | | | | | | |
| | | ΔT | 33 | 31 | 28 | 24 | 33 | 31 | 28 | 24 | 33 | 31 | 28 | 24 | 33 | 31 | 28 | 24 | 33 | 31 | 27 | 24 | 34 | 32 | 29 | 25 | 34 | 32 | 29 | 25 | | | | | | | |
| | | kW | 2.55 | 2.55 | 2.55 | 2.6 | 2.85 | 2.85 | 2.84 | 2.9 | 3.19 | 3.18 | 3.18 | 3.2 | 3.55 | 3.54 | 3.54 | 3.6 | 3.95 | 3.95 | 3.94 | 4.0 | 4.42 | 4.42 | 4.42 | 4.4 | 4.42 | 4.42 | 4.42 | 4.4 | | | | | | | |
| | | Amps | 9.1 | 9.1 | 9.0 | 9.2 | 10.5 | 10.4 | 10.4 | 10.5 | 12.0 | 12.0 | 11.9 | 12.0 | 13.6 | 13.6 | 13.6 | 13.7 | 15.5 | 15.5 | 15.4 | 15.5 | 17.6 | 17.6 | 17.6 | 17.7 | 17.6 | 17.6 | 17.6 | 17.7 | | | | | | | |
| | | Hi PR | 266 | 268 | 269 | 274.0 | 308 | 309 | 311 | 315.9 | 352 | 353 | 355 | 359.7 | 399 | 400 | 402 | 406.9 | 450 | 451 | 453 | 457.8 | 504 | 506 | 507 | 512.1 | 504 | 506 | 507 | 512.1 | | | | | | | |
| | | Lo PR | 124 | 126 | 129 | 133.8 | 131 | 133 | 136 | 141.3 | 138 | 139 | 143 | 147.8 | 143 | 145 | 148 | 153.3 | 149 | 150 | 153 | 158.7 | 156 | 157 | 160 | 165.4 | 156 | 157 | 160 | 165.4 | | | | | | | |
| | | MBh | 41.6 | 42.2 | 43.4 | 45.2 | 41.3 | 41.8 | 43.0 | 44.9 | 40.2 | 40.8 | 42.0 | 43.8 | 38.4 | 39.0 | 40.2 | 42.0 | 36.2 | 36.8 | 38.0 | 39.8 | 34.2 | 34.8 | 36.0 | 37.8 | 34.2 | 34.8 | 36.0 | 37.8 | | | | | | | |
| | | S/T | 1.00 | 0.93 | 0.80 | 0.7 | 1.00 | 0.94 | 0.81 | 0.7 | 1.00 | 1.00 | 0.83 | 0.7 | 1.00 | 1.00 | 0.85 | 0.7 | 1.00 | 1.00 | 0.87 | 0.7 | 1.00 | 1.00 | 1.00 | 0.8 | 1.00 | 1.00 | 1.00 | 0.8 | | | | | | | |
| | | ΔT | 32 | 30 | 26 | 22 | 32 | 30 | 26 | 22 | 32 | 30 | 26 | 22 | 32 | 30 | 26 | 22 | 31 | 29 | 26 | 22 | 31 | 29 | 26 | 22 | 32 | 31 | 27 | 23 | | | | | | | |
| | | kW | 2.57 | 2.57 | 2.57 | 2.59 | 2.87 | 2.87 | 2.86 | 2.89 | 3.21 | 3.20 | 3.20 | 3.22 | 3.57 | 3.56 | 3.56 | 3.58 | 3.97 | 3.97 | 3.96 | 3.99 | 4.44 | 4.44 | 4.44 | 4.46 | 4.44 | 4.44 | 4.44 | 4.46 | | | | | | | |
| | | Amps | 9.2 | 9.2 | 9.1 | 9.2 | 10.5 | 10.5 | 10.5 | 10.6 | 12.1 | 12.1 | 12.0 | 12.1 | 13.7 | 13.7 | 13.7 | 13.8 | 15.6 | 15.6 | 15.5 | 15.6 | 17.7 | 17.7 | 17.7 | 17.8 | 17.7 | 17.7 | 17.7 | 17.8 | | | | | | | |
| | Hi PR | 269 | 270 | 272 | 277.0 | 311 | 312 | 314 | 318.8 | 355 | 356 | 358 | 362.6 | 402 | 403 | 405 | 409.8 | 453 | 454 | 456 | 460.7 | 507 | 509 | 510 | 515.0 | 507 | 509 | 510 | 515.0 | | | | | | | | |
| | Lo PR | 126 | 128 | 131 | 136.1 | 134 | 135 | 138 | 143.6 | 140 | 142 | 145 | 150.1 | 146 | 147 | 150 | 155.6 | 151 | 153 | 156 | 161.0 | 158 | 159 | 163 | 167.7 | 158 | 159 | 163 | 167.7 | | | | | | | | |
| | MBh | 42.0 | 42.6 | 43.8 | 45.6 | 41.6 | 42.2 | 43.4 | 45.3 | 40.6 | 41.2 | 42.4 | 44.2 | 38.8 | 39.4 | 40.6 | 42.4 | 36.6 | 37.2 | 38.4 | 40.2 | 34.6 | 35.1 | 36.3 | 38.2 | 34.6 | 35.1 | 36.3 | 38.2 | | | | | | | | |
| | S/T | 1.00 | 0.96 | 0.82 | 0.7 | 1.00 | 1.00 | 0.83 | 0.7 | 1.00 | 1.00 | 0.85 | 0.7 | 1.00 | 1.00 | 0.87 | 0.7 | 1.00 | 1.00 | 0.90 | 0.8 | 1.00 | 1.00 | 1.00 | 0.8 | 1.00 | 1.00 | 1.00 | 0.8 | | | | | | | | |
| | ΔT | 31 | 29 | 26 | 22 | 31 | 29 | 25 | 22 | 31 | 29 | 26 | 22 | 31 | 29 | 25 | 22 | 31 | 29 | 25 | 21 | 32 | 30 | 26 | 23 | 32 | 30 | 26 | 23 | | | | | | | | |
| | kW | 2.58 | 2.58 | 2.57 | 2.6 | 2.88 | 2.88 | 2.87 | 2.9 | 3.21 | 3.21 | 3.21 | 3.2 | 3.58 | 3.57 | 3.57 | 3.6 | 3.98 | 3.98 | 3.97 | 4.0 | 4.45 | 4.45 | 4.44 | 4.5 | 4.45 | 4.45 | 4.44 | 4.5 | | | | | | | | |
| | Amps | 9.2 | 9.2 | 9.2 | 9.3 | 10.6 | 10.6 | 10.5 | 10.7 | 12.1 | 12.1 | 12.1 | 12.2 | 13.8 | 13.8 | 13.7 | 13.8 | 15.6 | 15.6 | 15.6 | 15.7 | 17.8 | 17.8 | 17.7 | 17.8 | 17.8 | 17.8 | 17.7 | 17.8 | | | | | | | | |
| | Hi PR | 271 | 272 | 274 | 278.3 | 313 | 314 | 316 | 320.2 | 356 | 358 | 359 | 364.0 | 404 | 405 | 407 | 411.2 | 454 | 456 | 457 | 462.1 | 509 | 510 | 512 | 516.4 | 509 | 510 | 512 | 516.4 | | | | | | | | |
| | Lo PR | 128 | 129 | 132 | 137.4 | 135 | 136 | 140 | 144.8 | 141 | 143 | 146 | 151.3 | 147 | 148 | 152 | 156.8 | 152 | 154 | 157 | 162.2 | 159 | 161 | 164 | 169.0 | 159 | 161 | 164 | 169.0 | | | | | | | | |

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects AHRI conditions
 kW = Total system power
 Amps = outdoor unit amps (comp. + fan)

| IDB | | OUTDOOR AMBIENT TEMPERATURE | | | | | | | | | | | | 105 | | | | | | | | | | | | 115 | | | | | | | | | | | | | | | | | | | |
|--------------------------------------|-------|-----------------------------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|---|
| | | 65 | | | | | | 75 | | | | | | 85 | | | | | | 95 | | | | | | 105 | | | | | | 115 | | | | | | | | | | | | | |
| | | AIRFLOW | | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | | | | | | | | | | |
| ENTERING INDOOR WET BULB TEMPERATURE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 70 | MbH | 45.7 | 46.3 | 47.7 | - | 45.3 | 45.9 | 47.3 | - | 44.1 | 44.7 | 46.1 | - | 42.0 | 42.7 | 44.0 | - | 39.5 | 40.2 | 41.5 | - | 37.2 | 37.9 | 39.2 | - | 35.0 | 35.7 | 37.0 | - | 32.8 | 33.5 | 34.8 | - | 30.6 | 31.3 | 32.6 | - | | | | | | | | |
| | S/T | 0.60 | 0.52 | 0.39 | - | 0.61 | 0.53 | 0.39 | - | 0.63 | 0.55 | 0.42 | - | 0.65 | 0.57 | 0.44 | - | 1.00 | 0.60 | 0.46 | - | 1.00 | 0.65 | 0.51 | - | 1.00 | 0.60 | 0.46 | - | 1.00 | 0.60 | 0.46 | - | 1.00 | 0.65 | 0.51 | - | | | | | | | | |
| | ΔT | 21 | 19 | 16 | - | 21 | 19 | 16 | - | 22 | 20 | 16 | - | 21 | 19 | 16 | - | 21 | 19 | 15 | - | 22 | 20 | 17 | - | 22 | 20 | 17 | - | 22 | 20 | 17 | - | 22 | 20 | 17 | - | | | | | | | | |
| | kW | 2.97 | 2.97 | 2.97 | - | 3.32 | 3.31 | 3.31 | - | 3.70 | 3.69 | 3.69 | - | 4.11 | 4.11 | 4.10 | - | 4.57 | 4.57 | 4.56 | - | 5.11 | 5.11 | 5.10 | - | 5.61 | 5.61 | 5.60 | - | 6.11 | 6.11 | 6.10 | - | 6.61 | 6.61 | 6.60 | - | | | | | | | | |
| | Amps | 10.6 | 10.6 | 10.6 | - | 12.2 | 12.2 | 12.1 | - | 13.9 | 13.9 | 13.9 | - | 15.8 | 15.8 | 15.8 | - | 17.9 | 17.9 | 17.9 | - | 20.4 | 20.4 | 20.3 | - | 23.0 | 23.0 | 22.9 | - | 25.6 | 25.6 | 25.5 | - | 28.2 | 28.2 | 28.1 | - | 30.8 | 30.8 | 30.7 | - | | | | |
| | Hi PR | 256 | 257 | 259 | - | 297 | 298 | 300 | - | 339 | 340 | 342 | - | 385 | 386 | 388 | - | 434 | 435 | 437 | - | 486 | 488 | 489 | - | 538 | 540 | 541 | - | 590 | 592 | 593 | - | 642 | 644 | 645 | - | 694 | 696 | 697 | - | | | | |
| | Lo PR | 122 | 122 | 125 | - | 127 | 129 | 132 | - | 134 | 135 | 138 | - | 139 | 141 | 144 | - | 145 | 146 | 149 | - | 151 | 153 | 156 | - | 157 | 159 | 162 | - | 163 | 165 | 168 | - | 171 | 173 | 176 | - | 177 | 179 | 182 | - | | | | |
| | MbH | 46.4 | 47.0 | 48.4 | - | 46.0 | 46.6 | 48.0 | - | 44.8 | 45.4 | 46.8 | - | 42.7 | 43.4 | 44.7 | - | 40.2 | 40.9 | 42.2 | - | 37.9 | 38.6 | 39.9 | - | 35.7 | 36.4 | 37.7 | - | 33.5 | 34.2 | 35.5 | - | 31.3 | 32.0 | 33.3 | - | 29.1 | 29.8 | 31.1 | - | 26.9 | 27.6 | 28.9 | - |
| | S/T | 0.67 | 0.60 | 0.46 | - | 0.68 | 0.60 | 0.47 | - | 0.71 | 0.63 | 0.49 | - | 0.72 | 0.65 | 0.51 | - | 1.00 | 0.67 | 0.53 | - | 1.00 | 0.72 | 0.59 | - | 1.00 | 0.67 | 0.53 | - | 1.00 | 0.67 | 0.53 | - | 1.00 | 0.72 | 0.59 | - | | | | | | | | |
| | ΔT | 20 | 18 | 14 | - | 20 | 18 | 14 | - | 20 | 18 | 15 | - | 20 | 18 | 14 | - | 20 | 18 | 14 | - | 21 | 19 | 15 | - | 21 | 19 | 15 | - | 21 | 19 | 15 | - | 21 | 19 | 15 | - | 21 | 19 | 15 | - | | | | |
| | kW | 3.00 | 2.99 | 2.99 | - | 3.34 | 3.33 | 3.33 | - | 3.72 | 3.72 | 3.71 | - | 4.13 | 4.13 | 4.12 | - | 4.59 | 4.59 | 4.58 | - | 5.13 | 5.13 | 5.12 | - | 5.67 | 5.67 | 5.66 | - | 6.21 | 6.21 | 6.20 | - | 6.75 | 6.75 | 6.74 | - | 7.29 | 7.29 | 7.28 | - | | | | |
| | Amps | 10.7 | 10.7 | 10.7 | - | 12.3 | 12.3 | 12.2 | - | 14.0 | 14.0 | 14.0 | - | 15.9 | 15.9 | 15.9 | - | 18.0 | 18.0 | 18.0 | - | 20.5 | 20.5 | 20.4 | - | 23.0 | 23.0 | 22.9 | - | 25.6 | 25.6 | 25.5 | - | 28.2 | 28.2 | 28.1 | - | 30.8 | 30.8 | 30.7 | - | | | | |
| Hi PR | 259 | 260 | 262 | - | 299 | 300 | 302 | - | 342 | 343 | 345 | - | 387 | 388 | 390 | - | 436 | 438 | 439 | - | 489 | 490 | 492 | - | 543 | 545 | 546 | - | 596 | 598 | 599 | - | 650 | 652 | 653 | - | 704 | 706 | 707 | - | | | | | |
| Lo PR | 122 | 124 | 127 | - | 129 | 131 | 134 | - | 136 | 137 | 140 | - | 141 | 143 | 146 | - | 147 | 148 | 151 | - | 153 | 155 | 158 | - | 157 | 159 | 162 | - | 163 | 165 | 168 | - | 171 | 173 | 176 | - | 177 | 179 | 182 | - | | | | | |
| MbH | 46.9 | 47.6 | 49.0 | - | 46.5 | 47.2 | 48.5 | - | 45.3 | 46.0 | 47.3 | - | 43.3 | 43.9 | 45.3 | - | 40.8 | 41.4 | 42.8 | - | 38.5 | 39.1 | 40.5 | - | 36.3 | 37.0 | 38.3 | - | 34.1 | 34.8 | 36.1 | - | 31.9 | 32.6 | 33.9 | - | 29.7 | 30.4 | 31.7 | - | 27.5 | 28.2 | 29.5 | - | |
| S/T | 0.70 | 0.63 | 0.49 | - | 0.71 | 0.63 | 0.49 | - | 0.73 | 0.66 | 0.52 | - | 0.75 | 0.68 | 0.54 | - | 1.00 | 0.70 | 0.56 | - | 1.00 | 0.75 | 0.61 | - | 1.00 | 0.70 | 0.56 | - | 1.00 | 0.70 | 0.56 | - | 1.00 | 0.75 | 0.61 | - | | | | | | | | | |
| ΔT | 19 | 17 | 14 | - | 19 | 17 | 13 | - | 19 | 17 | 14 | - | 19 | 17 | 13 | - | 19 | 17 | 13 | - | 20 | 18 | 14 | - | 20 | 18 | 14 | - | 20 | 18 | 14 | - | 20 | 18 | 14 | - | 20 | 18 | 14 | - | | | | | |
| kW | 3.01 | 3.00 | 3.00 | - | 3.35 | 3.35 | 3.34 | - | 3.73 | 3.73 | 3.72 | - | 4.14 | 4.14 | 4.13 | - | 4.60 | 4.60 | 4.59 | - | 5.14 | 5.14 | 5.14 | - | 5.68 | 5.68 | 5.67 | - | 6.22 | 6.22 | 6.21 | - | 6.76 | 6.76 | 6.75 | - | 7.30 | 7.30 | 7.29 | - | | | | | |
| Amps | 10.8 | 10.7 | 10.7 | - | 12.3 | 12.3 | 12.3 | - | 14.1 | 14.1 | 14.0 | - | 16.0 | 15.9 | 15.9 | - | 18.1 | 18.1 | 18.0 | - | 20.5 | 20.5 | 20.5 | - | 23.0 | 23.0 | 22.9 | - | 25.6 | 25.5 | 25.5 | - | 28.2 | 28.1 | 28.1 | - | 30.8 | 30.7 | 30.7 | - | | | | | |
| Hi PR | 260 | 261 | 263 | - | 301 | 302 | 304 | - | 343 | 344 | 346 | - | 389 | 390 | 392 | - | 438 | 439 | 441 | - | 491 | 492 | 494 | - | 545 | 546 | 548 | - | 599 | 600 | 601 | - | 653 | 654 | 655 | - | 707 | 708 | 709 | - | | | | | |
| Lo PR | 124 | 125 | 128 | - | 131 | 132 | 135 | - | 137 | 139 | 142 | - | 143 | 144 | 147 | - | 148 | 150 | 153 | - | 155 | 156 | 159 | - | 161 | 163 | 166 | - | 167 | 169 | 172 | - | 173 | 175 | 178 | - | 175 | 177 | 180 | - | | | | | |
| 75 | MbH | 45.7 | 46.4 | 47.7 | 49.8 | 45.3 | 46.0 | 47.3 | 49.4 | 44.1 | 44.8 | 46.1 | 48.2 | 42.1 | 42.7 | 44.1 | 46.2 | 39.5 | 40.2 | 41.6 | 43.6 | 37.2 | 37.9 | 39.3 | 41.3 | 35.0 | 35.7 | 37.0 | 39.1 | 32.8 | 33.5 | 34.8 | 36.9 | 30.6 | 31.3 | 32.6 | 34.7 | | | | | | | | |
| | S/T | 0.73 | 0.65 | 0.52 | 0.4 | 0.74 | 0.66 | 0.52 | 0.4 | 1.00 | 0.68 | 0.55 | 0.4 | 1.00 | 0.70 | 0.57 | 0.4 | 1.00 | 0.73 | 0.59 | 0.4 | 1.00 | 0.78 | 0.64 | 0.5 | 1.00 | 0.73 | 0.59 | 0.4 | 1.00 | 0.68 | 0.55 | 0.4 | 1.00 | 0.65 | 0.51 | 0.4 | | | | | | | | |
| | ΔT | 26 | 24 | 20 | 16 | 26 | 24 | 20 | 16 | 26 | 24 | 20 | 16 | 26 | 24 | 20 | 16 | 25 | 23 | 20 | 16 | 27 | 25 | 21 | 17 | 27 | 25 | 21 | 17 | 27 | 25 | 21 | 17 | 27 | 25 | 21 | 17 | | | | | | | | |
| | kW | 2.97 | 2.97 | 2.96 | 3.0 | 3.31 | 3.31 | 3.31 | 3.3 | 3.69 | 3.69 | 3.69 | 3.7 | 4.11 | 4.10 | 4.10 | 4.1 | 4.57 | 4.57 | 4.56 | 4.6 | 5.11 | 5.11 | 5.10 | 5.1 | 5.61 | 5.61 | 5.60 | 5.6 | 6.11 | 6.11 | 6.10 | 6.1 | 6.61 | 6.61 | 6.60 | 6.6 | | | | | | | | |
| | Amps | 10.6 | 10.6 | 10.6 | 10.7 | 12.2 | 12.1 | 12.1 | 12.2 | 13.9 | 13.9 | 13.9 | 14.0 | 15.8 | 15.8 | 15.8 | 15.9 | 17.9 | 17.9 | 17.9 | 18.0 | 20.4 | 20.4 | 20.4 | 20.5 | 23.0 | 23.0 | 22.9 | 23.0 | 25.6 | 25.6 | 25.5 | 25.6 | 28.2 | 28.2 | 28.1 | 28.2 | | | | | | | | |
| | Hi PR | 256 | 257 | 259 | 263.7 | 297 | 298 | 300 | 304.2 | 339 | 340 | 342 | 346.6 | 385 | 386 | 388 | 392.3 | 434 | 435 | 437 | 441.5 | 487 | 488 | 489 | 494.1 | 541 | 542 | 543 | 548 | 595 | 596 | 597 | 602 | 649 | 650 | 651 | 656 | | | | | | | | |
| | Lo PR | 120 | 122 | 125 | 129.7 | 127 | 129 | 132 | 137.1 | 134 | 135 | 138 | 143.5 | 139 | 141 | 144 | 148.9 | 145 | 146 | 149 | 154.2 | 151 | 153 | 156 | 160.9 | 157 | 159 | 162 | 167 | 163 | 165 | 168 | 173 | 171 | 173 | 176 | 181 | | | | | | | | |
| | MbH | 46.4 | 47.1 | 48.4 | 50.5 | 46.0 | 46.6 | 48.0 | 50.1 | 44.8 | 45.5 | 46.8 | 48.9 | 42.7 | 43.4 | 44.8 | 46.9 | 40.2 | 40.9 | 42.2 | 44.3 | 37.9 | 38.6 | 40.0 | 42.0 | 35.7 | 36.4 | 37.7 | 39.8 | 33.5 | 34.2 | 35.5 | 37.6 | 31.3 | 32.0 | 33.3 | 35.4 | | | | | | | | |
| | S/T | 0.80 | 0.73 | 0.59 | 0.4 | 0.81 | 0.73 | 0.60 | 0.5 | 1.00 | 0.76 | 0.62 | 0.5 | 1.00 | 0.78 | 0.64 | 0.5 | 1.00 | 0.80 | 0.66 | 0.5 | 1.00 | 1.00 | 0.72 | 0.6 | 1.00 | 0.78 | 0.64 | 0.5 | 1.00 | 0.73 | 0.59 | 0.4 | 1.00 | 0.68 | 0.55 | 0.4 | | | | | | | | |
| | ΔT | 24 | 22 | 19 | 15 | 24 | 22 | 19 | 15 | 24 | 22 | 19 | 15 | 24 | 22 | 19 | 15 | 24 | 22 | 18 | 15 | 25 | 23 | 20 | 16 | 27 | 25 | 21 | 17 | 27 | 25 | 21 | 17 | 27 | 25 | 21 | 17 | | | | | | | | |
| | kW | 2.99 | 2.99 | 2.98 | 3.01 | 3.33 | 3.33 | 3.33 | 3.35 | 3.72 | 3.71 | 3.71 | 3.73 | 4.13 | 4.12 | 4.12 | 4.15 | 4.59 | 4.59 | 4.58 | 4.61 | 5.13 | 5.13 | 5.12 | 5.15 | 5.67 | 5.67 | 5.66 | 5.7 | 6.21 | 6.21 | 6.20 | 6.2 | 6.75 | 6.75 | 6.74 | 6.7 | | | | | | | | |
| | Amps | 10.7 | 10.7 | 10.7 | 10.8 | 12.3 | 12.2 | 12.2 | 12.3 | 14.0 | 14.0 | 14.0 | 14.1 | 15.9 | 15.9 | 15.9 | 16.0 | 18.0 | 18.0 | 18.0 | 18.1 | 20.5 | 20.5 | 20.4 | 20.6 | 23.0 | 23.0 | 22.9 | 23.0 | 25.6 | 25.5 | 25.5 | 25.6 | 28.2 | 28.1 | 28.1 | 28.2 | | | | | | | | |
| Hi PR | 259 | 260 | 262 | 266.3 | 299 | 301 | 302 | 306.8 | 342 | 343 | 345 | 349.2 | 387 | 389 | 390 | 394.9 | 437 | 438 | 440 | 444.1 | 489 | 490 | 492 | 496.6 | 543 | 544 | 545 | 550 | 597 | 598 | 599 | 604 | 651 | 652 | 653 | 658 | | | | | | | | | |
| Lo PR | 122 | 124 | 127 | 131.8 | 129 | 131 | 134 | 139.1 | 136 | 137 | 140 | 145.5 | 141 | 143 | 146 | 151.0 | 147 | 148 | 151 | 156.3 | 153 | 155 | 158 | 162.9 | 159 | 161 | 164 | 169 | 165 | 167 | 170 | 175 | 173 | 175 | 178 | 183 | | | | | | | | | |
| MbH | 47.0 | 47.6 | 49.0 | 51.1 | 46.6 | 47.2 | 48.6 | 50.7 | 45.4 | 46.0 | 47.4 | 49.5 | 43.3 | 43.9 | 45.3 | 47.4 | 40.8 | 41.4 | 42.8 | 44.9 | 38.5 | 39.1 | 40.5 | 42.6 | 36.3 | 37.0 | 38.3 | 40.4 | 34.1 | 34.8 | 36.1 | 38.2 | 31.9 | 32.6 | 33.9 | 36.0 | | | | | | | | | |
| S/T | 0.83 | 0.76 | 0.62 | 0.5 | 0.84 | 0.76 | 0.63 | 0.5 | 1.00 | 0.79 | 0.65 | 0.5 | 1. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| IDB | AIRFLOW | OUTDOOR AMBIENT TEMPERATURE | | | | | | | | | | | | 105 | | | | | | | | | | | | 115 | | | | | | | | | | | |
|-------|---------|-----------------------------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|-----|--|--|--|--|--|--|--|--|--|--|--|
| | | 65 | | | | 75 | | | | 85 | | | | 95 | | | | 105 | | | | 115 | | | | | | | | | | | | | | | |
| | | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | | | | | | | | | | | | |
| 80 | MbH | 46.0 | 46.6 | 48.0 | 50.1 | 45.5 | 46.2 | 47.6 | 49.6 | 44.3 | 45.0 | 46.4 | 48.5 | 42.3 | 42.9 | 44.3 | 46.4 | 39.8 | 40.4 | 41.8 | 43.9 | 37.5 | 38.1 | 39.5 | 41.6 | | | | | | | | | | | | |
| | S/T | 0.86 | 0.78 | 0.64 | 0.5 | 1.00 | 0.79 | 0.65 | 0.5 | 1.00 | 0.81 | 0.67 | 0.5 | 1.00 | 0.83 | 0.69 | 0.5 | 1.00 | 1.00 | 0.72 | 0.6 | 1.00 | 1.00 | 0.77 | 0.6 | | | | | | | | | | | | |
| | ΔT | 30 | 28 | 24 | 21 | 30 | 28 | 24 | 21 | 30 | 28 | 25 | 21 | 30 | 28 | 24 | 20 | 30 | 28 | 24 | 20 | 31 | 29 | 25 | 21 | | | | | | | | | | | | |
| | kW | 2.97 | 2.97 | 2.97 | 3.0 | 3.32 | 3.31 | 3.31 | 3.3 | 3.70 | 3.69 | 3.69 | 3.7 | 4.11 | 4.11 | 4.10 | 4.1 | 4.57 | 4.57 | 4.56 | 4.6 | 5.11 | 5.11 | 5.10 | 5.1 | | | | | | | | | | | | |
| | Amps | 10.6 | 10.6 | 10.6 | 10.7 | 12.2 | 12.2 | 12.1 | 12.3 | 13.9 | 13.9 | 13.9 | 14.0 | 15.8 | 15.8 | 15.8 | 15.9 | 17.9 | 17.9 | 17.9 | 18.0 | 20.4 | 20.4 | 20.4 | 20.5 | | | | | | | | | | | | |
| | Hi PR | 257 | 258 | 260 | 264.2 | 297 | 298 | 300 | 304.7 | 340 | 341 | 343 | 347.1 | 385 | 386 | 388 | 392.8 | 435 | 436 | 438 | 442.0 | 487 | 488 | 490 | 494.5 | | | | | | | | | | | | |
| | Lo PR | 121 | 122 | 125 | 130.3 | 128 | 129 | 132 | 137.6 | 134 | 136 | 139 | 144.0 | 140 | 141 | 144 | 149.4 | 145 | 147 | 150 | 154.7 | 152 | 153 | 156 | 161.4 | | | | | | | | | | | | |
| | MbH | 46.6 | 47.3 | 48.7 | 50.8 | 46.2 | 46.9 | 48.3 | 50.3 | 45.0 | 45.7 | 47.1 | 49.1 | 43.0 | 43.6 | 45.0 | 47.1 | 40.5 | 41.1 | 42.5 | 44.6 | 38.2 | 38.8 | 40.2 | 42.3 | | | | | | | | | | | | |
| | S/T | 1.00 | 0.85 | 0.72 | 0.6 | 1.00 | 0.86 | 0.72 | 0.6 | 1.00 | 0.89 | 0.75 | 0.6 | 1.00 | 0.91 | 0.77 | 0.6 | 1.00 | 1.00 | 0.79 | 0.6 | 1.00 | 1.00 | 0.84 | 0.7 | | | | | | | | | | | | |
| | ΔT | 29 | 27 | 23 | 19 | 28 | 27 | 23 | 19 | 29 | 27 | 23 | 19 | 28 | 27 | 23 | 19 | 28 | 26 | 23 | 19 | 29 | 27 | 24 | 20 | | | | | | | | | | | | |
| | kW | 3.00 | 2.99 | 2.99 | 3.01 | 3.34 | 3.33 | 3.33 | 3.35 | 3.72 | 3.72 | 3.71 | 3.74 | 4.13 | 4.13 | 4.12 | 4.15 | 4.59 | 4.59 | 4.58 | 4.61 | 5.13 | 5.13 | 5.12 | 5.15 | | | | | | | | | | | | |
| | Amps | 10.7 | 10.7 | 10.7 | 10.8 | 12.3 | 12.3 | 12.2 | 12.3 | 14.0 | 14.0 | 14.0 | 14.1 | 15.9 | 15.9 | 15.9 | 16.0 | 18.0 | 18.0 | 18.0 | 18.1 | 20.5 | 20.5 | 20.4 | 20.6 | | | | | | | | | | | | |
| Hi PR | 259 | 261 | 262 | 266.8 | 300 | 301 | 303 | 307.3 | 342 | 343 | 345 | 349.7 | 388 | 389 | 391 | 395.3 | 437 | 438 | 440 | 444.6 | 490 | 491 | 493 | 497.1 | | | | | | | | | | | | | |
| Lo PR | 123 | 124 | 127 | 132.3 | 130 | 131 | 135 | 139.7 | 136 | 138 | 141 | 146.1 | 142 | 143 | 146 | 151.5 | 147 | 149 | 152 | 156.8 | 154 | 155 | 158 | 163.5 | | | | | | | | | | | | | |
| MbH | 47.2 | 47.8 | 49.2 | 51.3 | 46.8 | 47.4 | 48.8 | 50.9 | 45.6 | 46.2 | 47.6 | 49.7 | 43.5 | 44.2 | 45.6 | 47.6 | 41.0 | 41.7 | 43.0 | 45.1 | 38.7 | 39.4 | 40.7 | 42.8 | | | | | | | | | | | | | |
| S/T | 1.00 | 0.88 | 0.75 | 0.6 | 1.00 | 0.89 | 0.75 | 0.6 | 1.00 | 0.91 | 0.78 | 0.6 | 1.00 | 0.93 | 0.80 | 0.7 | 1.00 | 1.00 | 0.82 | 0.7 | 1.00 | 1.00 | 0.87 | 0.7 | | | | | | | | | | | | | |
| ΔT | 28 | 26 | 22 | 18 | 28 | 26 | 22 | 18 | 28 | 26 | 22 | 19 | 28 | 26 | 22 | 18 | 27 | 25 | 22 | 18 | 29 | 27 | 23 | 19 | | | | | | | | | | | | | |
| kW | 3.01 | 3.00 | 3.00 | 3.0 | 3.35 | 3.35 | 3.34 | 3.4 | 3.73 | 3.73 | 3.72 | 3.7 | 4.14 | 4.14 | 4.13 | 4.2 | 4.60 | 4.60 | 4.59 | 4.6 | 5.14 | 5.14 | 5.14 | 5.2 | | | | | | | | | | | | | |
| Amps | 10.8 | 10.7 | 10.7 | 10.8 | 12.3 | 12.3 | 12.3 | 12.4 | 14.1 | 14.1 | 14.0 | 14.1 | 16.0 | 15.9 | 15.9 | 16.0 | 18.1 | 18.1 | 18.0 | 18.1 | 20.5 | 20.5 | 20.5 | 20.6 | | | | | | | | | | | | | |
| Hi PR | 261 | 262 | 264 | 268.4 | 302 | 303 | 304 | 308.9 | 344 | 345 | 347 | 351.3 | 390 | 391 | 393 | 397.0 | 439 | 440 | 442 | 446.2 | 491 | 492 | 494 | 498.8 | | | | | | | | | | | | | |
| Lo PR | 124 | 126 | 129 | 133.8 | 131 | 133 | 136 | 141.2 | 138 | 139 | 142 | 147.6 | 143 | 145 | 148 | 153.0 | 149 | 150 | 153 | 158.3 | 155 | 157 | 160 | 165.0 | | | | | | | | | | | | | |
| 85 | MbH | 46.7 | 47.4 | 48.7 | 50.8 | 46.3 | 47.0 | 48.3 | 50.4 | 45.1 | 45.8 | 47.1 | 49.2 | 43.1 | 43.7 | 45.1 | 47.2 | 40.5 | 41.2 | 42.6 | 44.7 | 38.3 | 38.9 | 40.3 | 42.4 | | | | | | | | | | | | |
| | S/T | 1.00 | 0.88 | 0.75 | 0.6 | 1.00 | 0.89 | 0.75 | 0.6 | 1.00 | 1.00 | 0.78 | 0.6 | 1.00 | 1.00 | 0.80 | 0.7 | 1.00 | 1.00 | 0.82 | 0.7 | 1.00 | 1.00 | 0.87 | 0.7 | | | | | | | | | | | | |
| | ΔT | 34 | 32 | 28 | 24 | 34 | 32 | 28 | 24 | 34 | 32 | 28 | 25 | 34 | 32 | 28 | 24 | 33 | 31 | 28 | 24 | 35 | 33 | 29 | 25 | | | | | | | | | | | | |
| | kW | 2.98 | 2.98 | 2.97 | 3.0 | 3.32 | 3.32 | 3.31 | 3.3 | 3.70 | 3.70 | 3.69 | 3.7 | 4.12 | 4.11 | 4.11 | 4.1 | 4.58 | 4.57 | 4.57 | 4.6 | 5.12 | 5.11 | 5.11 | 5.1 | | | | | | | | | | | | |
| | Amps | 10.6 | 10.6 | 10.6 | 10.7 | 12.2 | 12.2 | 12.2 | 12.3 | 13.9 | 13.9 | 13.9 | 14.0 | 15.8 | 15.8 | 15.8 | 15.9 | 17.9 | 17.9 | 17.9 | 18.0 | 20.4 | 20.4 | 20.4 | 20.5 | | | | | | | | | | | | |
| | Hi PR | 258 | 259 | 261 | 265.4 | 299 | 300 | 301 | 305.9 | 341 | 342 | 344 | 348.3 | 387 | 388 | 390 | 394.0 | 436 | 437 | 439 | 443.2 | 488 | 489 | 491 | 495.7 | | | | | | | | | | | | |
| | Lo PR | 122 | 124 | 127 | 132.1 | 130 | 131 | 134 | 139.4 | 136 | 138 | 141 | 145.8 | 142 | 143 | 146 | 151.2 | 147 | 148 | 151 | 156.5 | 154 | 155 | 158 | 163.2 | | | | | | | | | | | | |
| | MbH | 47.4 | 48.1 | 49.4 | 51.5 | 47.0 | 47.7 | 49.0 | 51.1 | 45.8 | 46.5 | 47.8 | 49.9 | 43.8 | 44.4 | 45.8 | 47.9 | 41.2 | 41.9 | 43.3 | 45.3 | 38.9 | 39.6 | 41.0 | 43.1 | | | | | | | | | | | | |
| | S/T | 1.00 | 0.96 | 0.82 | 0.7 | 1.00 | 0.96 | 0.83 | 0.7 | 1.00 | 1.00 | 0.85 | 0.7 | 1.00 | 1.00 | 0.87 | 0.7 | 1.00 | 1.00 | 0.89 | 0.7 | 1.00 | 1.00 | 1.00 | 0.8 | | | | | | | | | | | | |
| | ΔT | 32 | 30 | 27 | 23 | 32 | 30 | 27 | 23 | 33 | 31 | 27 | 23 | 32 | 30 | 27 | 23 | 32 | 30 | 26 | 23 | 33 | 31 | 28 | 24 | | | | | | | | | | | | |
| | kW | 3.00 | 3.00 | 2.99 | 3.02 | 3.34 | 3.34 | 3.33 | 3.36 | 3.72 | 3.72 | 3.72 | 3.74 | 4.14 | 4.13 | 4.13 | 4.15 | 4.60 | 4.59 | 4.59 | 4.62 | 5.14 | 5.14 | 5.13 | 5.16 | | | | | | | | | | | | |
| | Amps | 10.7 | 10.7 | 10.7 | 10.8 | 12.3 | 12.3 | 12.3 | 12.4 | 14.0 | 14.0 | 14.0 | 14.1 | 15.9 | 15.9 | 15.9 | 16.0 | 18.0 | 18.0 | 18.0 | 18.1 | 20.5 | 20.5 | 20.5 | 20.6 | | | | | | | | | | | | |
| Hi PR | 261 | 262 | 264 | 268.0 | 301 | 302 | 304 | 308.5 | 343 | 345 | 346 | 350.9 | 389 | 390 | 392 | 396.5 | 438 | 440 | 441 | 445.8 | 491 | 492 | 494 | 498.3 | | | | | | | | | | | | | |
| Lo PR | 124 | 126 | 129 | 134.1 | 132 | 133 | 136 | 141.5 | 138 | 140 | 143 | 147.9 | 144 | 145 | 148 | 153.3 | 149 | 150 | 153 | 158.6 | 156 | 157 | 160 | 165.3 | | | | | | | | | | | | | |
| MbH | 48.0 | 48.6 | 50.0 | 52.1 | 47.6 | 48.2 | 49.6 | 51.7 | 46.4 | 47.0 | 48.4 | 50.5 | 44.3 | 45.0 | 46.3 | 48.4 | 41.8 | 42.4 | 43.8 | 45.9 | 39.5 | 40.1 | 41.5 | 43.6 | | | | | | | | | | | | | |
| S/T | 1.00 | 0.99 | 0.85 | 0.7 | 1.00 | 0.99 | 0.85 | 0.7 | 1.00 | 1.00 | 0.88 | 0.7 | 1.00 | 1.00 | 0.90 | 0.8 | 1.00 | 1.00 | 0.92 | 0.8 | 1.00 | 1.00 | 1.00 | 0.8 | | | | | | | | | | | | | |
| ΔT | 32 | 30 | 26 | 22 | 32 | 30 | 26 | 22 | 32 | 30 | 26 | 22 | 32 | 30 | 26 | 22 | 31 | 29 | 26 | 22 | 32 | 31 | 27 | 23 | | | | | | | | | | | | | |
| kW | 3.01 | 3.01 | 3.00 | 3.0 | 3.35 | 3.35 | 3.35 | 3.4 | 3.74 | 3.73 | 3.73 | 3.8 | 4.15 | 4.15 | 4.14 | 4.2 | 4.61 | 4.61 | 4.60 | 4.6 | 5.15 | 5.15 | 5.14 | 5.2 | | | | | | | | | | | | | |
| Amps | 10.8 | 10.8 | 10.7 | 10.9 | 12.4 | 12.3 | 12.3 | 12.4 | 14.1 | 14.1 | 14.1 | 14.2 | 16.0 | 16.0 | 15.9 | 16.1 | 18.1 | 18.1 | 18.1 | 18.2 | 20.6 | 20.6 | 20.5 | 20.6 | | | | | | | | | | | | | |
| Hi PR | 262 | 263 | 265 | 269.6 | 303 | 304 | 306 | 310.1 | 345 | 346 | 348 | 352.5 | 391 | 392 | 394 | 398.2 | 440 | 441 | 443 | 447.4 | 493 | 494 | 495 | 500.0 | | | | | | | | | | | | | |
| Lo PR | 126 | 127 | 131 | 135.6 | 133 | 135 | 138 | 143.0 | 140 | 141 | 144 | 149.4 | 145 | 147 | 150 | 154.8 | 150 | 152 | 155 | 160.1 | 157 | 159 | 162 | 166.8 | | | | | | | | | | | | | |

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects AHRI conditions
 kW = Total system power
 Amps = outdoor unit amps (comp.+fan)

| IDB | | OUTDOOR AMBIENT TEMPERATURE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|-------------|-----------------------------|------|-------|-------|-------|------|-------|-------|-------|------|--------------------------------------|-------|-------|------------|-------------|-------|-------|------|--------------------------------------|-------|-------|------|-------|-------|-------|------|--------------------------------------|-------|-------|------|-------|-------|-------|------|--------------------------------------|------|-----|------|------|------|-----|----|--|--|--|--|--|--|
| | | 65 | | | | | | | | 75 | | | | | | | | 85 | | | | | | | | 95 | | | | | | | | 105 | | | | | | | | 115 | | | | | | | |
| | | AIRFLOW | | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | ENTERING INDOOR WET BULB TEMPERATURE | | | | 59 | 63 | 67 | 71 | ENTERING INDOOR WET BULB TEMPERATURE | | | | 59 | 63 | 67 | 71 | ENTERING INDOOR WET BULB TEMPERATURE | | | | 59 | 63 | 67 | 71 | ENTERING INDOOR WET BULB TEMPERATURE | | | | 59 | 63 | 67 | 71 | | | | | | |
| 70 | 1525 | MBh | 56.7 | 57.5 | 59.2 | - | 56.2 | 57.0 | 58.7 | - | 54.7 | 55.5 | 57.2 | - | 52.2 | 53.0 | 54.7 | - | 49.1 | 49.9 | 51.6 | - | 46.3 | 47.1 | 48.8 | - | 49.1 | 49.9 | 51.6 | - | 46.3 | 47.1 | 48.8 | - | 49.1 | 49.9 | 51.6 | - | 46.3 | 47.1 | 48.8 | - | | | | | | | |
| | | S/T | 0.61 | 0.54 | 0.42 | - | 0.62 | 0.55 | 0.42 | - | 0.64 | 0.57 | 0.45 | - | 0.66 | 0.59 | 0.47 | - | 1.00 | 0.61 | 0.49 | - | 1.00 | 0.66 | 0.53 | - | 1.00 | 0.61 | 0.49 | - | 1.00 | 0.66 | 0.53 | - | 1.00 | 0.61 | 0.49 | - | 1.00 | 0.66 | 0.53 | - | | | | | | | |
| | | ΔT | 21 | 19 | 15 | - | 21 | 19 | 15 | - | 21 | 19 | 16 | - | 21 | 19 | 15 | - | 21 | 19 | 15 | - | 21 | 19 | 15 | - | 21 | 19 | 15 | - | 21 | 19 | 15 | - | 21 | 19 | 15 | - | 21 | 19 | 15 | - | | | | | | | |
| | | kW | 3.54 | 3.53 | 3.53 | - | 3.96 | 3.96 | 3.95 | - | 4.44 | 4.44 | 4.43 | - | 4.96 | 4.96 | 4.95 | - | 5.54 | 5.54 | 5.53 | - | 6.22 | 6.21 | 6.21 | - | 6.22 | 6.21 | 6.21 | - | 6.22 | 6.21 | 6.21 | - | 6.22 | 6.21 | 6.21 | - | 6.22 | 6.21 | 6.21 | - | | | | | | | |
| | | Amps | 13.1 | 13.1 | 13.1 | - | 15.1 | 15.1 | 15.0 | - | 17.3 | 17.2 | 17.2 | - | 19.6 | 19.6 | 19.6 | - | 22.3 | 22.3 | 22.2 | - | 25.4 | 25.4 | 25.3 | - | 25.4 | 25.4 | 25.3 | - | 25.4 | 25.4 | 25.3 | - | 25.4 | 25.4 | 25.3 | - | 25.4 | 25.4 | 25.3 | - | | | | | | | |
| | | Hi PR | 256 | 257 | 259 | - | 296 | 297 | 299 | - | 338 | 339 | 341 | - | 383 | 384 | 386 | - | 432 | 433 | 434 | - | 483 | 485 | 486 | - | 483 | 485 | 486 | - | 483 | 485 | 486 | - | 483 | 485 | 486 | - | 483 | 485 | 486 | - | | | | | | | |
| | Lo PR | 122 | 124 | 127 | - | 130 | 131 | 134 | - | 136 | 137 | 141 | - | 141 | 143 | 146 | - | 147 | 148 | 151 | - | 153 | 155 | 158 | - | 153 | 155 | 158 | - | 153 | 155 | 158 | - | 153 | 155 | 158 | - | 153 | 155 | 158 | - | | | | | | | | |
| | 1750 | MBh | 57.8 | 58.5 | 60.2 | - | 57.3 | 58.0 | 59.7 | - | 55.8 | 56.6 | 58.3 | - | 53.3 | 54.1 | 55.7 | - | 50.2 | 51.0 | 52.7 | - | 47.4 | 48.2 | 49.9 | - | 50.2 | 51.0 | 52.7 | - | 47.4 | 48.2 | 49.9 | - | 50.2 | 51.0 | 52.7 | - | 47.4 | 48.2 | 49.9 | - | | | | | | | |
| | | S/T | 0.65 | 0.58 | 0.45 | - | 0.65 | 0.58 | 0.46 | - | 0.68 | 0.61 | 0.48 | - | 1.00 | 0.63 | 0.50 | - | 1.00 | 0.65 | 0.52 | - | 1.00 | 0.69 | 0.57 | - | 1.00 | 0.65 | 0.52 | - | 1.00 | 0.69 | 0.57 | - | 1.00 | 0.65 | 0.52 | - | | | | | | | | | | | |
| | | ΔT | 20 | 18 | 14 | - | 20 | 18 | 14 | - | 20 | 18 | 14 | - | 20 | 18 | 14 | - | 20 | 18 | 14 | - | 20 | 18 | 14 | - | 20 | 18 | 14 | - | 20 | 18 | 14 | - | 20 | 18 | 14 | - | | | | | | | | | | | |
| | | kW | 3.56 | 3.55 | 3.55 | - | 3.99 | 3.98 | 3.98 | - | 4.46 | 4.46 | 4.45 | - | 4.98 | 4.98 | 4.97 | - | 5.56 | 5.56 | 5.55 | - | 6.24 | 6.24 | 6.23 | - | 6.24 | 6.24 | 6.23 | - | 6.24 | 6.24 | 6.23 | - | 6.24 | 6.24 | 6.23 | - | | | | | | | | | | | |
| | | Amps | 13.2 | 13.2 | 13.2 | - | 15.2 | 15.2 | 15.1 | - | 17.4 | 17.3 | 17.3 | - | 19.7 | 19.7 | 19.7 | - | 22.4 | 22.4 | 22.3 | - | 25.5 | 25.5 | 25.4 | - | 25.5 | 25.5 | 25.4 | - | 25.5 | 25.5 | 25.4 | - | 25.5 | 25.5 | 25.4 | - | | | | | | | | | | | |
| Hi PR | | 258 | 259 | 261 | - | 298 | 299 | 301 | - | 340 | 341 | 343 | - | 385 | 386 | 388 | - | 434 | 435 | 437 | - | 486 | 487 | 489 | - | 486 | 487 | 489 | - | 486 | 487 | 489 | - | 486 | 487 | 489 | - | | | | | | | | | | | | |
| Lo PR | 128 | 129 | 132 | - | 132 | 133 | 136 | - | 138 | 140 | 143 | - | 144 | 145 | 148 | - | 149 | 151 | 154 | - | 156 | 157 | 160 | - | 156 | 157 | 160 | - | 156 | 157 | 160 | - | 156 | 157 | 160 | - | | | | | | | | | | | | | |
| 75 | 1525 | MBh | 56.7 | 57.5 | 59.2 | 61.7 | 56.2 | 57.0 | 58.7 | 61.2 | 54.8 | 55.6 | 57.2 | 59.8 | 52.2 | 53.0 | 54.7 | 57.3 | 49.2 | 50.0 | 51.6 | 54.2 | 46.4 | 47.2 | 48.8 | 51.4 | 49.2 | 50.0 | 51.6 | 54.2 | 46.4 | 47.2 | 48.8 | 51.4 | | | | | | | | | | | | | | | |
| | | S/T | 0.73 | 0.66 | 0.54 | 0.4 | 0.74 | 0.67 | 0.54 | 0.4 | 1.00 | 0.69 | 0.57 | 0.4 | 1.00 | 0.71 | 0.58 | 0.5 | 1.00 | 0.73 | 0.60 | 0.5 | 1.00 | 1.00 | 0.65 | 0.5 | 1.00 | 0.73 | 0.60 | 0.5 | 1.00 | 1.00 | 0.65 | 0.5 | | | | | | | | | | | | | | | |
| | | ΔT | 26 | 24 | 20 | 16 | 26 | 24 | 20 | 16 | 26 | 24 | 20 | 16 | 26 | 24 | 20 | 16 | 25 | 23 | 19 | 15 | 27 | 25 | 21 | 17 | 25 | 23 | 19 | 15 | 27 | 25 | 21 | 17 | | | | | | | | | | | | | | | |
| | | kW | 3.53 | 3.53 | 3.52 | 3.6 | 3.96 | 3.96 | 3.95 | 4.0 | 4.44 | 4.44 | 4.43 | 4.5 | 4.96 | 4.95 | 4.95 | 5.0 | 5.54 | 5.53 | 5.53 | 5.6 | 6.21 | 6.21 | 6.20 | 6.2 | 6.21 | 6.21 | 6.20 | 6.2 | 6.21 | 6.21 | 6.20 | 6.2 | | | | | | | | | | | | | | | |
| | | Amps | 13.1 | 13.1 | 13.0 | 13.2 | 15.1 | 15.0 | 15.0 | 15.2 | 17.2 | 17.2 | 17.2 | 17.3 | 19.6 | 19.6 | 19.6 | 19.7 | 22.3 | 22.2 | 22.2 | 22.4 | 25.4 | 25.3 | 25.3 | 25.5 | 25.4 | 25.3 | 25.3 | 25.5 | 25.4 | 25.3 | 25.3 | 25.5 | | | | | | | | | | | | | | | |
| | | Hi PR | 256 | 257 | 259 | 263.3 | 296 | 297 | 299 | 303.3 | 338 | 339 | 341 | 345.2 | 383 | 384 | 386 | 390.4 | 432 | 433 | 435 | 439.1 | 484 | 485 | 485 | 491.0 | 484 | 485 | 485 | 491.0 | 484 | 485 | 485 | 491.0 | | | | | | | | | | | | | | | |
| | Lo PR | 122 | 124 | 127 | 132.0 | 130 | 131 | 134 | 139.3 | 136 | 138 | 141 | 145.7 | 141 | 143 | 146 | 151.1 | 147 | 148 | 151 | 156.5 | 152 | 154 | 157 | 163.1 | 152 | 154 | 157 | 163.1 | 152 | 154 | 157 | 163.1 | | | | | | | | | | | | | | | | |
| | 1750 | MBh | 57.8 | 58.6 | 60.2 | 62.8 | 57.3 | 58.1 | 59.7 | 62.3 | 55.8 | 56.6 | 58.3 | 60.8 | 53.3 | 54.1 | 55.8 | 58.3 | 50.2 | 51.0 | 52.7 | 55.3 | 47.4 | 48.2 | 49.9 | 52.4 | 50.2 | 51.0 | 52.7 | 55.3 | 47.4 | 48.2 | 49.9 | 52.4 | | | | | | | | | | | | | | | |
| | | S/T | 0.77 | 0.70 | 0.57 | 0.4 | 0.77 | 0.70 | 0.58 | 0.4 | 1.00 | 0.73 | 0.60 | 0.5 | 1.00 | 0.74 | 0.62 | 0.5 | 1.00 | 0.76 | 0.64 | 0.5 | 1.00 | 1.00 | 0.69 | 0.6 | 1.00 | 0.76 | 0.64 | 0.5 | 1.00 | 1.00 | 0.69 | 0.6 | | | | | | | | | | | | | | | |
| | | ΔT | 25 | 22 | 19 | 15 | 25 | 22 | 19 | 15 | 25 | 23 | 19 | 15 | 24 | 22 | 19 | 15 | 24 | 22 | 18 | 14 | 26 | 23 | 20 | 16 | 24 | 22 | 18 | 14 | 26 | 23 | 20 | 16 | | | | | | | | | | | | | | | |
| | | kW | 3.56 | 3.55 | 3.54 | 3.58 | 3.98 | 3.98 | 3.97 | 4.01 | 4.46 | 4.46 | 4.45 | 4.48 | 4.98 | 4.98 | 4.97 | 5.00 | 5.56 | 5.55 | 5.55 | 5.58 | 6.24 | 6.23 | 6.23 | 6.26 | 6.24 | 6.23 | 6.23 | 6.26 | 6.24 | 6.23 | 6.23 | 6.26 | | | | | | | | | | | | | | | |
| | | Amps | 13.2 | 13.2 | 13.1 | 13.3 | 15.2 | 15.1 | 15.1 | 15.3 | 17.3 | 17.3 | 17.3 | 17.4 | 19.7 | 19.7 | 19.7 | 19.8 | 22.4 | 22.3 | 22.3 | 22.5 | 25.5 | 25.4 | 25.4 | 25.6 | 25.5 | 25.4 | 25.4 | 25.6 | 25.5 | 25.4 | 25.4 | 25.6 | | | | | | | | | | | | | | | |
| Hi PR | | 258 | 260 | 261 | 265.8 | 298 | 300 | 301 | 305.8 | 340 | 341 | 343 | 347.7 | 386 | 387 | 388 | 392.8 | 434 | 435 | 437 | 441.5 | 486 | 487 | 487 | 493.5 | 486 | 487 | 487 | 493.5 | 486 | 487 | 487 | 493.5 | | | | | | | | | | | | | | | | |
| Lo PR | 125 | 126 | 129 | 134.3 | 132 | 133 | 137 | 141.6 | 138 | 140 | 143 | 148.1 | 144 | 145 | 148 | 153.5 | 149 | 151 | 154 | 158.8 | 156 | 157 | 160 | 165.5 | 156 | 157 | 160 | 165.5 | 156 | 157 | 160 | 165.5 | | | | | | | | | | | | | | | | | |
| 2000 | MBh | 59.3 | 60.1 | 61.7 | 64.3 | 58.8 | 59.6 | 61.2 | 63.8 | 57.3 | 58.1 | 59.8 | 62.3 | 54.8 | 55.6 | 57.2 | 59.8 | 51.7 | 52.5 | 54.2 | 56.7 | 48.9 | 49.7 | 51.4 | 53.9 | 51.7 | 52.5 | 54.2 | 56.7 | 48.9 | 49.7 | 51.4 | 53.9 | | | | | | | | | | | | | | | | |
| | S/T | 0.77 | 0.70 | 0.58 | 0.4 | 1.00 | 0.71 | 0.58 | 0.5 | 1.00 | 0.73 | 0.61 | 0.5 | 1.00 | 0.75 | 0.62 | 0.5 | 1.00 | 0.77 | 0.64 | 0.5 | 1.00 | 1.00 | 0.69 | 0.6 | 1.00 | 0.77 | 0.64 | 0.5 | 1.00 | 1.00 | 0.69 | 0.6 | | | | | | | | | | | | | | | | |
| | ΔT | 23 | 21 | 17 | 13 | 23 | 21 | 17 | 13 | 24 | 22 | 18 | 14 | 23 | 21 | 17 | 13 | 23 | 21 | 17 | 13 | 24 | 22 | 18 | 14 | 23 | 21 | 17 | 13 | 24 | 22 | 18 | 14 | | | | | | | | | | | | | | | | |
| | kW | 3.58 | 3.57 | 3.57 | 3.6 | 4.00 | 4.00 | 3.99 | 4.0 | 4.48 | 4.48 | 4.47 | 4.5 | 5.00 | 5.00 | 4.99 | 5.0 | 5.58 | 5.58 | 5.57 | 5.6 | 6.26 | 6.25 | 6.25 | 6.3 | 6.26 | 6.25 | 6.25 | 6.3 | 6.26 | 6.25 | 6.25 | 6.3 | | | | | | | | | | | | | | | | |
| | Amps | 13.3 | 13.3 | 13.2 | 13.4 | 15.2 | 15.2 | 15.2 | 15.4 | 17.4 | 17.4 | 17.4 | 17.5 | 19.8 | 19.8 | 19.8 | 19.9 | 22.6 | 22.4 | 22.4 | 22.6 | 25.6 | 25.5 | 25.5 | 25.7 | 25.6 | 25.5 | 25.5 | 25.7 | 25.6 | 25.5 | 25.5 | 25.7 | | | | | | | | | | | | | | | | |
| | Hi PR | 261 | 262 | 264 | 268.6 | 301 | 302 | 304 | 308.6 | 343 | 344 | 346 | 350.6 | 388 | 390 | 391 | 395.7 | 437 | 438 | 440 | 444.4 | 489 | 490 | 490 | 496.3 | 489 | 490 | 490 | 496.3 | 489 | 490 | 490 | 496.3 | | | | | | | | | | | | | | | | |
| Lo PR | 128 | 129 | 132 | 137.4 | 135 | 137 | 140 | 144.7 | 141 | 143 | 146 | 151.1 | 147 | 148 | 151 | 156.6 | 152 | 154 | 157 | 161.9 | 159 | 160 | 163 | 168.6 | 159 | 160 | 163 | 168.6 | 159 | 160 | 163 | 168.6 | | | | | | | | | | | | | | | | | |

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects ACCA (TVA) conditions
 kW = Total system power
 Amps = outdoor unit amps (comp.+fan)

EXPANDED COOLING DATA — DX3SQN6010A*/CA*T4961*4A* (CONT.)

| IDB | AIRFLOW | OUTDOOR AMBIENT TEMPERATURE | | | | | | | | | | | | | | | | | | | | | | | |
|-------|---------|-----------------------------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|------|------|-------|-------|
| | | 65 | | | | 75 | | | | 85 | | | | 95 | | | | 105 | | | | 115 | | | |
| | | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 | 59 | 63 | 67 | 71 |
| 80 | MbH | 57.0 | 57.8 | 59.5 | 62.0 | 56.5 | 57.3 | 59.0 | 61.5 | 55.1 | 55.8 | 57.5 | 60.1 | 52.5 | 53.3 | 55.0 | 57.6 | 49.5 | 50.3 | 51.9 | 54.5 | 46.7 | 47.5 | 49.1 | 51.7 |
| | S/T | 1.00 | 0.78 | 0.65 | 0.5 | 1.00 | 0.78 | 0.66 | 0.5 | 1.00 | 0.81 | 0.68 | 0.6 | 1.00 | 0.83 | 0.70 | 0.6 | 1.00 | 1.00 | 0.72 | 0.6 | 1.00 | 1.00 | 0.77 | 0.6 |
| | ΔT | 30 | 28 | 24 | 20 | 30 | 28 | 24 | 20 | 31 | 29 | 25 | 21 | 30 | 28 | 24 | 20 | 30 | 28 | 24 | 20 | 31 | 29 | 25 | 21 |
| | kW | 3.54 | 3.53 | 3.52 | 3.6 | 3.96 | 3.96 | 3.95 | 4.0 | 4.44 | 4.44 | 4.43 | 4.5 | 4.96 | 4.96 | 4.95 | 5.0 | 5.54 | 5.54 | 5.53 | 5.6 | 6.22 | 6.21 | 6.21 | 6.2 |
| | Amps | 13.1 | 13.1 | 13.1 | 13.2 | 15.1 | 15.0 | 15.0 | 15.2 | 17.3 | 17.2 | 17.2 | 17.4 | 19.6 | 19.6 | 19.6 | 19.7 | 22.3 | 22.3 | 22.2 | 22.4 | 25.4 | 25.4 | 25.4 | 25.5 |
| | Hi PR | 256 | 258 | 259 | 263.8 | 296 | 298 | 299 | 303.8 | 338 | 339 | 341 | 345.7 | 384 | 385 | 386 | 390.8 | 432 | 433 | 435 | 439.5 | 484 | 485 | 487 | 491.5 |
| | Lo PR | 125 | 124 | 127 | 132.5 | 130 | 132 | 135 | 139.8 | 137 | 138 | 141 | 146.2 | 142 | 143 | 147 | 151.7 | 147 | 149 | 152 | 157.0 | 154 | 155 | 159 | 163.7 |
| | MbH | 58.1 | 58.9 | 60.5 | 63.1 | 57.6 | 58.4 | 60.0 | 62.6 | 56.1 | 56.9 | 58.6 | 61.1 | 53.6 | 54.4 | 56.1 | 58.6 | 50.5 | 51.3 | 53.0 | 55.5 | 47.7 | 48.5 | 50.2 | 52.7 |
| | S/T | 1.00 | 0.81 | 0.69 | 0.6 | 1.00 | 0.82 | 0.69 | 0.6 | 1.00 | 0.84 | 0.72 | 0.6 | 1.00 | 1.00 | 0.73 | 0.6 | 1.00 | 1.00 | 0.76 | 0.6 | 1.00 | 1.00 | 0.80 | 0.7 |
| | ΔT | 29 | 27 | 23 | 19 | 29 | 27 | 23 | 19 | 29 | 27 | 23 | 19 | 29 | 27 | 23 | 19 | 29 | 27 | 23 | 19 | 30 | 28 | 24 | 20 |
| | kW | 3.56 | 3.55 | 3.55 | 3.58 | 3.99 | 3.98 | 3.98 | 4.01 | 4.46 | 4.46 | 4.45 | 4.49 | 4.98 | 4.98 | 4.97 | 5.00 | 5.56 | 5.56 | 5.55 | 5.58 | 6.24 | 6.24 | 6.23 | 6.26 |
| | Amps | 13.2 | 13.2 | 13.2 | 13.3 | 15.2 | 15.1 | 15.1 | 15.3 | 17.4 | 17.3 | 17.3 | 17.5 | 19.7 | 19.7 | 19.7 | 19.8 | 22.4 | 22.4 | 22.3 | 22.5 | 25.5 | 25.5 | 25.4 | 25.6 |
| | Hi PR | 259 | 260 | 262 | 266.2 | 299 | 300 | 302 | 306.2 | 341 | 342 | 344 | 348.2 | 386 | 387 | 389 | 393.3 | 435 | 436 | 438 | 442.0 | 487 | 488 | 490 | 493.9 |
| Lo PR | 125 | 127 | 130 | 134.8 | 132 | 134 | 137 | 142.2 | 139 | 140 | 143 | 148.6 | 144 | 146 | 149 | 154.0 | 150 | 151 | 154 | 159.3 | 156 | 158 | 161 | 166.0 | |
| MbH | 59.6 | 60.3 | 62.0 | 64.6 | 59.1 | 59.8 | 61.5 | 64.1 | 57.6 | 58.4 | 60.1 | 62.6 | 55.1 | 55.9 | 57.5 | 60.1 | 52.0 | 52.8 | 54.5 | 57.0 | 49.2 | 50.0 | 51.7 | 54.2 | |
| S/T | 1.00 | 0.82 | 0.69 | 0.6 | 1.00 | 0.82 | 0.70 | 0.6 | 1.00 | 0.85 | 0.72 | 0.6 | 1.00 | 1.00 | 0.74 | 0.6 | 1.00 | 1.00 | 0.76 | 0.6 | 1.00 | 1.00 | 0.81 | 0.7 | |
| ΔT | 28 | 26 | 22 | 18 | 28 | 26 | 22 | 18 | 28 | 26 | 22 | 18 | 28 | 26 | 22 | 18 | 28 | 26 | 22 | 18 | 29 | 27 | 23 | 19 | |
| kW | 3.58 | 3.57 | 3.57 | 3.6 | 4.01 | 4.00 | 4.00 | 4.0 | 4.49 | 4.48 | 4.47 | 4.5 | 5.00 | 5.00 | 4.99 | 5.0 | 5.58 | 5.58 | 5.57 | 5.6 | 6.26 | 6.26 | 6.25 | 6.3 | |
| Amps | 13.3 | 13.3 | 13.2 | 13.4 | 15.3 | 15.2 | 15.2 | 15.4 | 17.4 | 17.4 | 17.4 | 17.5 | 19.8 | 19.8 | 19.8 | 19.9 | 22.5 | 22.4 | 22.4 | 22.6 | 25.6 | 25.6 | 25.5 | 25.7 | |
| Hi PR | 262 | 263 | 265 | 269.1 | 302 | 303 | 305 | 309.1 | 344 | 345 | 347 | 351.0 | 389 | 390 | 392 | 396.2 | 438 | 439 | 440 | 444.9 | 489 | 491 | 492 | 496.8 | |
| Lo PR | 128 | 130 | 133 | 137.9 | 136 | 137 | 140 | 145.2 | 142 | 143 | 147 | 151.7 | 147 | 149 | 152 | 157.1 | 153 | 154 | 157 | 162.4 | 159 | 161 | 164 | 169.1 | |
| 85 | MbH | 58.0 | 58.7 | 60.4 | 63.0 | 57.5 | 58.2 | 59.9 | 62.5 | 56.0 | 56.8 | 58.5 | 61.0 | 53.5 | 54.3 | 55.9 | 58.5 | 50.4 | 51.2 | 52.9 | 55.4 | 47.6 | 48.4 | 50.1 | 52.6 |
| | S/T | 1.00 | 0.87 | 0.75 | 0.6 | 1.00 | 0.88 | 0.75 | 0.6 | 1.00 | 1.00 | 0.78 | 0.6 | 1.00 | 1.00 | 0.79 | 0.7 | 1.00 | 1.00 | 0.81 | 0.7 | 1.00 | 1.00 | 1.00 | 0.7 |
| | ΔT | 34 | 32 | 29 | 24 | 34 | 32 | 28 | 24 | 35 | 33 | 29 | 25 | 34 | 32 | 28 | 24 | 34 | 32 | 28 | 24 | 35 | 33 | 29 | 25 |
| | kW | 3.54 | 3.54 | 3.53 | 3.6 | 3.97 | 3.97 | 3.96 | 4.0 | 4.45 | 4.45 | 4.44 | 4.5 | 4.97 | 4.96 | 4.96 | 5.0 | 5.55 | 5.54 | 5.54 | 5.6 | 6.23 | 6.22 | 6.21 | 6.2 |
| | Amps | 13.1 | 13.1 | 13.1 | 13.2 | 15.1 | 15.1 | 15.1 | 15.2 | 17.3 | 17.3 | 17.2 | 17.4 | 19.7 | 19.6 | 19.6 | 19.8 | 22.3 | 22.3 | 22.3 | 22.4 | 25.4 | 25.4 | 25.4 | 25.5 |
| | Hi PR | 258 | 259 | 261 | 264.9 | 298 | 299 | 301 | 305.0 | 340 | 341 | 342 | 346.9 | 385 | 386 | 388 | 392.0 | 433 | 435 | 436 | 440.7 | 485 | 486 | 488 | 492.7 |
| | Lo PR | 125 | 126 | 129 | 134.3 | 132 | 133 | 137 | 141.6 | 138 | 140 | 143 | 148.1 | 144 | 145 | 148 | 153.5 | 149 | 151 | 154 | 158.8 | 156 | 157 | 160 | 165.5 |
| | MbH | 59.0 | 59.8 | 61.5 | 64.0 | 58.5 | 59.3 | 61.0 | 63.5 | 57.1 | 57.8 | 59.5 | 62.1 | 54.5 | 55.3 | 57.0 | 59.6 | 51.5 | 52.3 | 53.9 | 56.5 | 48.7 | 49.5 | 51.1 | 53.7 |
| | S/T | 1.00 | 0.91 | 0.78 | 0.6 | 1.00 | 1.00 | 0.79 | 0.7 | 1.00 | 1.00 | 0.81 | 0.7 | 1.00 | 1.00 | 0.83 | 0.7 | 1.00 | 1.00 | 0.85 | 0.7 | 1.00 | 1.00 | 1.00 | 0.8 |
| | ΔT | 33 | 31 | 27 | 23 | 33 | 31 | 27 | 23 | 33 | 31 | 28 | 24 | 33 | 31 | 27 | 23 | 33 | 31 | 27 | 23 | 34 | 32 | 28 | 24 |
| | kW | 3.57 | 3.56 | 3.55 | 3.59 | 3.99 | 3.99 | 3.98 | 4.02 | 4.47 | 4.47 | 4.46 | 4.49 | 4.99 | 4.99 | 4.98 | 5.01 | 5.57 | 5.56 | 5.56 | 5.59 | 6.25 | 6.24 | 6.24 | 6.27 |
| | Amps | 13.2 | 13.2 | 13.2 | 13.3 | 15.2 | 15.2 | 15.2 | 15.3 | 17.4 | 17.4 | 17.3 | 17.5 | 19.8 | 19.7 | 19.7 | 19.9 | 22.4 | 22.4 | 22.4 | 22.5 | 25.5 | 25.5 | 25.5 | 25.6 |
| | Hi PR | 260 | 261 | 263 | 267.4 | 300 | 301 | 303 | 307.4 | 342 | 343 | 345 | 349.4 | 387 | 388 | 390 | 394.5 | 436 | 437 | 439 | 443.2 | 488 | 489 | 491 | 495.1 |
| Lo PR | 127 | 128 | 132 | 136.6 | 134 | 136 | 139 | 144.0 | 141 | 142 | 145 | 150.4 | 146 | 148 | 151 | 155.8 | 151 | 153 | 156 | 161.2 | 158 | 160 | 163 | 167.8 | |
| MbH | 60.5 | 61.3 | 63.0 | 65.5 | 60.0 | 60.8 | 62.5 | 65.0 | 58.5 | 59.3 | 61.0 | 63.5 | 56.0 | 56.8 | 58.5 | 61.0 | 52.9 | 53.7 | 55.4 | 58.0 | 50.1 | 50.9 | 52.6 | 55.2 | |
| S/T | 1.00 | 0.91 | 0.79 | 0.7 | 1.00 | 1.00 | 0.79 | 0.7 | 1.00 | 1.00 | 0.82 | 0.7 | 1.00 | 1.00 | 0.83 | 0.7 | 1.00 | 1.00 | 0.85 | 0.7 | 1.00 | 1.00 | 1.00 | 0.8 | |
| ΔT | 32 | 30 | 26 | 22 | 32 | 30 | 26 | 22 | 32 | 30 | 26 | 22 | 32 | 30 | 26 | 22 | 32 | 30 | 26 | 22 | 33 | 31 | 27 | 23 | |
| kW | 3.59 | 3.58 | 3.58 | 3.6 | 4.02 | 4.01 | 4.00 | 4.0 | 4.49 | 4.49 | 4.48 | 4.5 | 5.01 | 5.01 | 5.00 | 5.0 | 5.59 | 5.59 | 5.58 | 5.6 | 6.27 | 6.26 | 6.26 | 6.3 | |
| Amps | 13.3 | 13.3 | 13.3 | 13.4 | 15.3 | 15.3 | 15.2 | 15.4 | 17.5 | 17.5 | 17.4 | 17.6 | 19.9 | 19.8 | 19.8 | 20.0 | 22.5 | 22.5 | 22.5 | 22.6 | 25.6 | 25.6 | 25.6 | 25.7 | |
| Hi PR | 263 | 264 | 266 | 270.3 | 303 | 304 | 306 | 310.3 | 345 | 346 | 348 | 352.2 | 390 | 391 | 393 | 397.4 | 439 | 440 | 442 | 446.0 | 491 | 492 | 494 | 498.0 | |
| Lo PR | 130 | 132 | 135 | 139.7 | 137 | 139 | 142 | 147.1 | 144 | 145 | 148 | 153.5 | 149 | 151 | 154 | 158.9 | 155 | 156 | 159 | 164.2 | 161 | 163 | 166 | 170.9 | |

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects AHRI conditions
 kW = Total system power
 Amps = outdoor unit amps (comp.+fan)

PERFORMANCE DATA

| DX3SQN1810A*/CA*FA2422*6A* | | | | |
|---|---------------|----------------|--------------|--------------|
| CONDITIONS: 80 °F IBD, 67 °F IWB @ 520 CFM | | | | |
| OUTDOOR TEM. ° F. | TOTAL BTU/H | SENSIBLE BTU/H | LATENT BTU/H | TOTAL WATTS |
| 75 | 18,250 | 12,300 | 5,950 | 1,240 |
| 80 | 18,050 | 12,150 | 5,900 | 1,310 |
| 85 | 17,800 | 12,000 | 5,800 | 1,380 |
| 90 | 17,400 | 11,750 | 5,650 | 1,460 |
| 95 | 17,000 | 11,450 | 5,550 | 1,530 |
| 100 | 16,550 | 11,150 | 5,400 | 1,620 |
| 105 | 16,050 | 10,850 | 5,200 | 1,700 |
| 110 | 15,650 | 10,550 | 5,100 | 1,800 |
| 115 | 15,200 | 10,250 | 4,950 | 1,890 |
| TVA CONDITIONS @ 95° OD DB, 75° ID DB 63° ID WB | | | | |
| 95° | 16,400 | 11,500 | 4,900 | 1,530 |

| DX3SQN2410A*/CA*TA2422*4A* | | | | |
|---|---------------|----------------|--------------|--------------|
| CONDITIONS: 80 °F IBD, 67 °F IWB @ 800 CFM | | | | |
| OUTDOOR TEM. ° F. | TOTAL BTU/H | SENSIBLE BTU/H | LATENT BTU/H | TOTAL WATTS |
| 75 | 24,250 | 16,550 | 7,700 | 1,660 |
| 80 | 23,950 | 16,350 | 7,600 | 1,750 |
| 85 | 23,650 | 16,100 | 7,550 | 1,840 |
| 90 | 23,150 | 15,750 | 7,400 | 1,940 |
| 95 | 22,600 | 15,400 | 7,200 | 2,030 |
| 100 | 22,000 | 15,000 | 7,000 | 2,140 |
| 105 | 21,350 | 14,550 | 6,800 | 2,250 |
| 110 | 20,800 | 14,150 | 6,650 | 2,380 |
| 115 | 20,200 | 13,750 | 6,450 | 2,510 |
| TVA CONDITIONS @ 95° OD DB, 75° ID DB 63° ID WB | | | | |
| 95° | 21,800 | 15,450 | 6,350 | 2,030 |

| DX3SQN3010A*/CA*FA3626*6A* | | | | |
|---|---------------|----------------|--------------|--------------|
| CONDITIONS: 80 °F IBD, 67 °F IWB @ 1105 CFM | | | | |
| OUTDOOR TEM. ° F. | TOTAL BTU/H | SENSIBLE BTU/H | LATENT BTU/H | TOTAL WATTS |
| 75 | 30,450 | 22,000 | 8,450 | 2,110 |
| 80 | 29,950 | 21,000 | 8,950 | 2,230 |
| 85 | 29,400 | 20,000 | 9,400 | 2,340 |
| 90 | 28,900 | 20,250 | 8,650 | 2,470 |
| 95 | 28,400 | 20,500 | 7,900 | 2,600 |
| 100 | 27,600 | 19,950 | 7,650 | 2,750 |
| 105 | 26,800 | 19,350 | 7,450 | 2,890 |
| 110 | 26,100 | 18,850 | 7,250 | 3,060 |
| 115 | 25,350 | 18,300 | 7,050 | 3,220 |
| TVA CONDITIONS @ 95° OD DB, 75° ID DB 63° ID WB | | | | |
| 95° | 27,400 | 16,400 | 11,000 | 2,040 |


| DX3SQN3610A*/CA*FA4226*6A* | | | | |
|---|---------------|----------------|--------------|--------------|
| CONDITIONS: 80 °F IBD, 67 °F IWB @ 1270 CFM | | | | |
| OUTDOOR TEM. ° F. | TOTAL BTU/H | SENSIBLE BTU/H | LATENT BTU/H | TOTAL WATTS |
| 75 | 36,650 | 27,250 | 9,400 | 2,480 |
| 80 | 36,200 | 26,900 | 9,300 | 2,630 |
| 85 | 35,750 | 26,550 | 9,200 | 2,770 |
| 90 | 35,000 | 26,000 | 9,000 | 2,930 |
| 95 | 34,200 | 25,400 | 8,800 | 3,080 |
| 100 | 33,250 | 24,700 | 8,550 | 3,250 |
| 105 | 32,300 | 24,000 | 8,300 | 3,420 |
| 110 | 31,450 | 23,350 | 8,100 | 3,630 |
| 115 | 30,550 | 22,700 | 7,850 | 3,830 |
| TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB | | | | |
| 95° | 33,000 | 25,500 | 7,500 | 3,080 |

| DX3SQN4210A*/CA*F4961*6A* | | | | |
|---|---------------|----------------|---------------|--------------|
| CONDITIONS: 80 °F IBD, 67 °F IWB @ 1460 CFM | | | | |
| OUTDOOR TEM. ° F. | TOTAL BTU/H | SENSIBLE BTU/H | LATENT BTU/H | TOTAL WATTS |
| 75 | 42,350 | 30,950 | 11,400 | 2,860 |
| 80 | 41,850 | 30,600 | 11,250 | 3,030 |
| 85 | 41,300 | 30,200 | 11,100 | 3,190 |
| 90 | 40,400 | 29,550 | 10,850 | 3,370 |
| 95 | 39,500 | 28,850 | 10,650 | 3,550 |
| 100 | 38,400 | 28,050 | 10,350 | 3,760 |
| 105 | 37,300 | 27,250 | 10,050 | 3,960 |
| 110 | 36,300 | 26,500 | 9,800 | 4,200 |
| 115 | 35,300 | 25,750 | 9,550 | 4,430 |
| TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB | | | | |
| 95° | 38,100 | 28,950 | 9,150 | 3,560 |

| DX3SQN4810A*/CA*F4961*6A* | | | | |
|---|---------------|----------------|---------------|--------------|
| CONDITIONS: 80 °F IBD, 67 °F IWB @ 1640 CFM | | | | |
| OUTDOOR TEM. ° F. | TOTAL BTU/H | SENSIBLE BTU/H | LATENT BTU/H | TOTAL WATTS |
| 75 | 48,250 | 36,100 | 12,150 | 3,330 |
| 80 | 47,650 | 35,700 | 11,950 | 3,520 |
| 85 | 47,050 | 35,250 | 11,800 | 3,710 |
| 90 | 46,050 | 34,500 | 11,550 | 3,920 |
| 95 | 45,000 | 33,700 | 11,300 | 4,120 |
| 100 | 43,750 | 32,750 | 11,000 | 4,350 |
| 105 | 42,500 | 31,800 | 10,700 | 4,580 |
| 110 | 41,350 | 30,950 | 10,400 | 4,850 |
| 115 | 40,200 | 30,100 | 10,100 | 5,120 |
| TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB | | | | |
| 95° | 43,400 | 33,800 | 9,600 | 4,130 |

| DX3SQN6010A*/CA*T4961*4A* | | | | |
|---|---------------|----------------|---------------|--------------|
| CONDITIONS: 80 °F IBD, 67 °F IWB @ 1565 CFM | | | | |
| OUTDOOR TEM. ° F. | TOTAL BTU/H | SENSIBLE BTU/H | LATENT BTU/H | TOTAL WATTS |
| 75 | 57,900 | 39,500 | 18,400 | 4,130 |
| 80 | 57,200 | 39,050 | 18,150 | 4,390 |
| 85 | 56,450 | 38,550 | 17,900 | 4,640 |
| 90 | 55,250 | 37,700 | 17,550 | 4,910 |
| 95 | 54,000 | 36,850 | 17,150 | 5,180 |
| 100 | 52,500 | 35,850 | 16,650 | 5,490 |
| 105 | 51,000 | 34,800 | 16,200 | 5,800 |
| 110 | 49,650 | 33,850 | 15,800 | 6,160 |
| 115 | 48,250 | 32,900 | 15,350 | 6,510 |
| TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB | | | | |
| 95° | 52,050 | 36,950 | 15,100 | 5,190 |

***ALL AHRI SYSTEM RATINGS ARE ACCESSIBLE IN THE UNITARY MATCHUP TOOL VIA
DAIKIN CITY OR IN THE DAIKIN SYSTEM CONFIGURATOR TOOL VIA PARTNERLINK.***

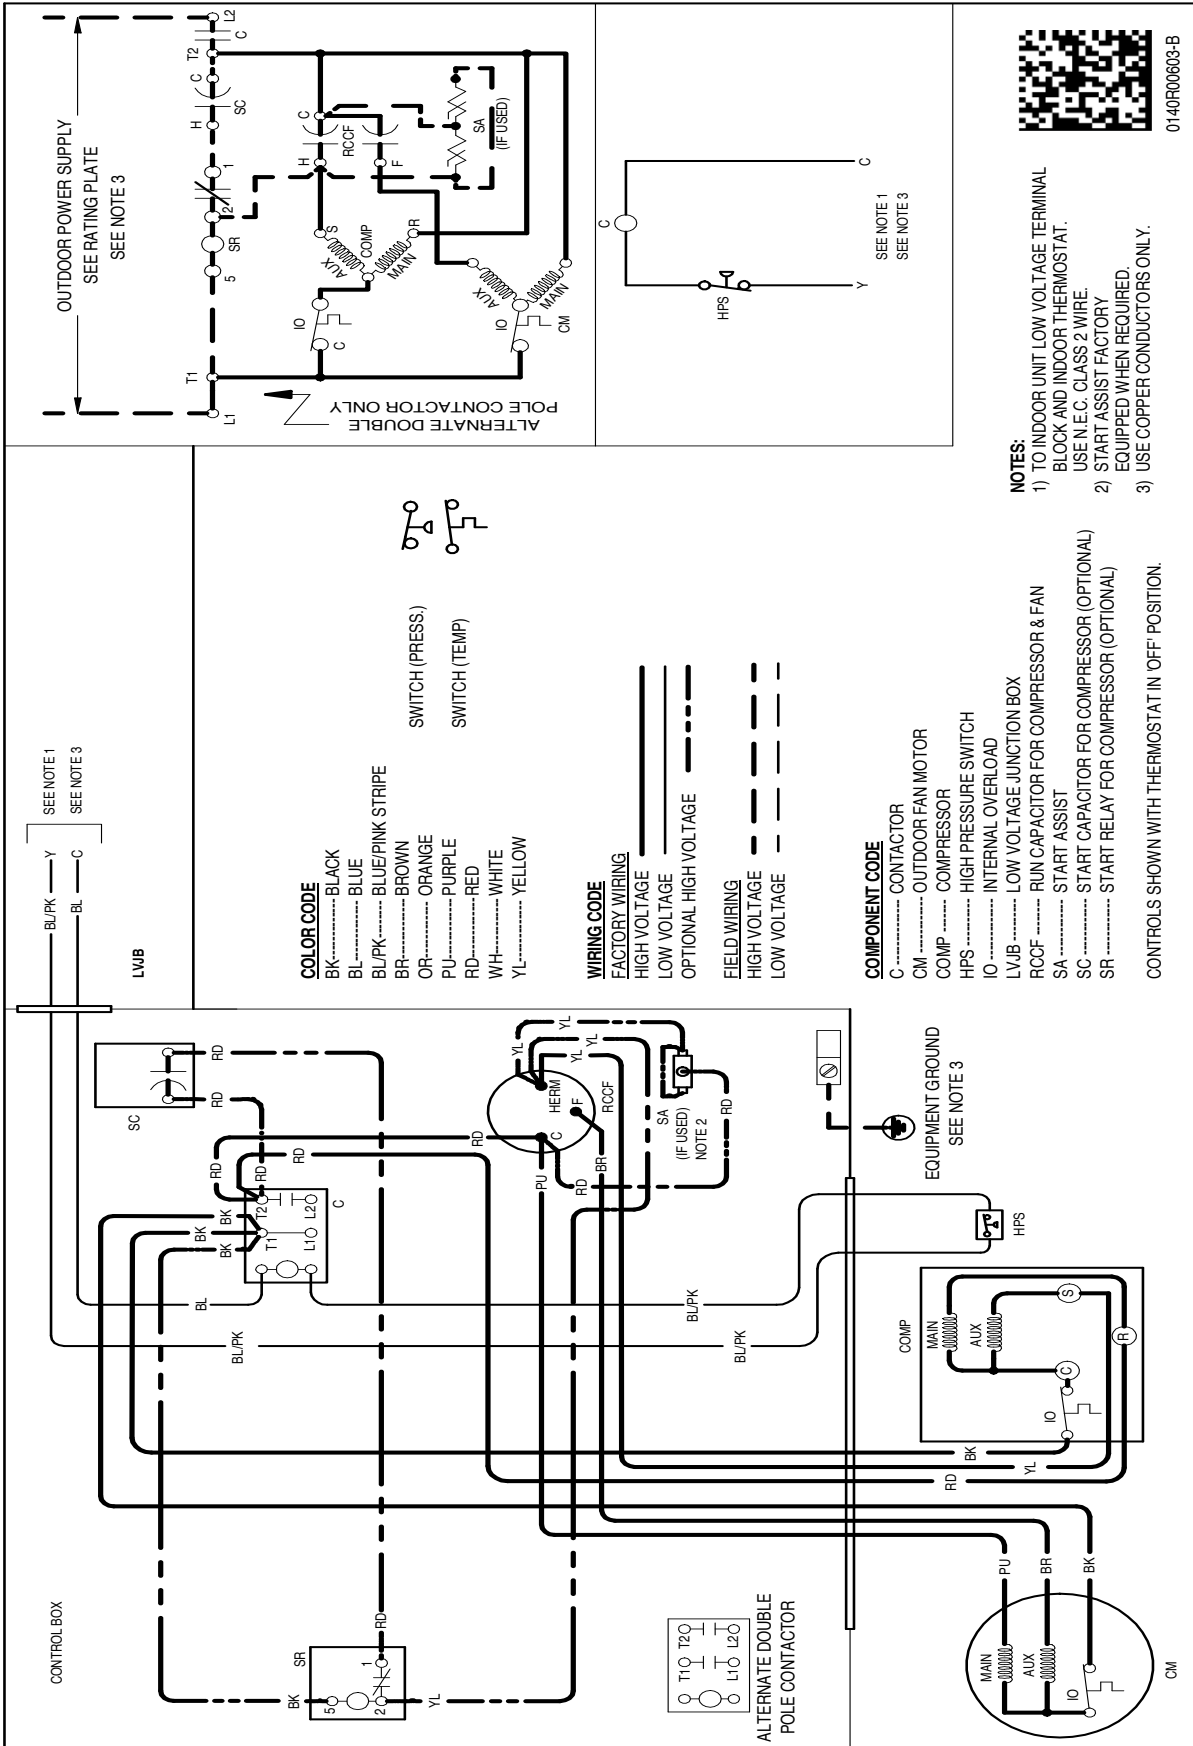


Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.



WARNING

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

DIMENSIONS

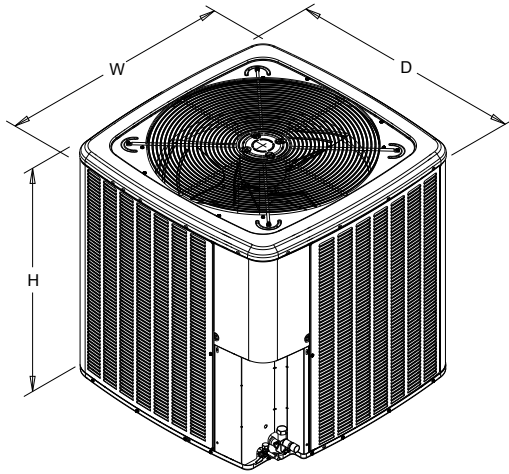

| MODEL | DIMENSIONS | | |
|--------------|------------|-----|-----|
| | W" | D" | H" |
| DX3SQN1810A* | 26 | 26 | 27 |
| DX3SQN2410A* | 26 | 26 | 32½ |
| DX3SQN3010A* | 29 | 29 | 32½ |
| DX3SQN3610A* | 29 | 29 | 32½ |
| DX3SQN4210A* | 29 | 29 | 39½ |
| DX3SQN4810A* | 35½ | 35½ | 35½ |
| DX3SQN6010A* | 35½ | 35½ | 39½ |

ACCESSORIES

| MODEL | DESCRIPTION | DX3SQ N1810A* | DX3SQ N2410A* | DX3SQ N3010A* | DX3SQ N3610A* | DX3SQ N4210A* | DX3SQ N4810A* | DX3SQ N6010A* |
|----------------------------------|--------------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|
| ABK-20 | Anchor Bracket Kit ^ | X | X | X | X | X | X | X |
| ASC-01 | Anti-Short Cycle Kit | X | X | X | X | X | X | X |
| Factory Installed Hard-start Kit | | | X | X | | | | |
| CSR-U-1 | Hard-start Kit | X | | | X | | | |
| CSR-U-2 | Hard-start Kit | | | | X | X | X | X |
| CSR-U-3 | Hard-start Kit | | | | | | X | X |
| FSK01A ¹ | Freeze Protection Kit | X | X | X | X | X | X | X |
| LSK02A ² | Liquid Line Solenoid Kit | X | X | X | X | X | X | X |
| LAKT01 | Low-Ambient Kit | X | X | X | X | X | X | |
| O130R00000S | Low-Pressure Switch Kit | X | X | X | X | X | X | X |
| TXV-FX-KX-2T ² | TXV Kit | X | X | | | | | |
| TXV-FX-KX-3T ² | TXV Kit | | | X | X | | | |
| TXV-FX-KX-5T ² | TXV Kit | | | | | X | X | X |

⁰ Contains 20 brackets; four brackets needed to anchor unit to pad

¹ Installed on indoor coil

² Condensing units and heat pumps with reciprocating or rotary compressors require the use of start-assist components when used in conjunction with an indoor coil using a non-bleed thermal expansion valve refrigerant metering device or liquid line solenoid kit. The TXV should always be sized based on the tonnage of the outdoor unit.

