



VRV IV S-series



VRV IV S-series HEAT PUMP SYSTEMS

LIGHT COMMERCIAL /
RESIDENTIAL





What is Daikin VRV IV S-series?

One Flexible Package


Daikin VRV IV S-series is a complement to the renowned Daikin VRV family of cooling and heating systems, and brings the technology into smaller applications including residential single family homes.

VRV is built upon 4 basic “Building Blocks” — Outdoor Unit, Indoor Unit, Piping, and Controls — providing the attributes of a central chilled water system but with the simplicity of a split system.

In its 1-phase powered VRV IV S-series format, this makes it very flexible and ideal for energy-efficient and comfortable cooling and heating of many types of buildings such as single family homes, multi-family housing, retail, restaurant, small office and much more.



Outdoor Unit

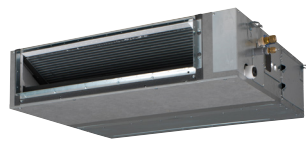

Indoor Unit



Piping



Controls

VRV IV S-series Features:

- » Single-phase technology is perfect for light commercial and residential applications in 36,000, 48,000 and 60,000 Btu/h models.
- » Space-saving design to fit in tight areas and realize quick and easy installation.
- » Savings in energy use due to higher SEER and HSPF ratings when compared to VRV III-S.
- » Soft sound level operation ensures a comfortable fit in any room.
- » Single-supplier reliability. The system — factory engineered and 80% complete upon delivery — is fully optimized by Daikin, plus has self-diagnostics and one of the best warranties in the industry*.
- » Simplified equipment selection with a flexible array of indoor unit options.

* Complete warranty details available from your local Daikin manufacturer's representative or distributor or online at www.daikincomfort.com.

Applications

- » Condominiums and apartments
- » Single family homes
- » Retail/restaurants
- » Small offices



The Solution for Light Commercial Applications



Light Commercial

The VRV IV S-series system is a highly efficient solution for small commercial buildings requiring heating and cooling of up to 9 zones. A mix of ducted and ductfree indoor units can be combined to provide individual comfort and ease of installation.

Whether you are working with space constraints or want to maximize the amount of commercial space available, the VRV IV S-series system gives you the flexibility you need. With its simple, versatile design and long piping lengths (up to 394 ft. actual piping length one way), the VRV IV S-series can accommodate practically any floor layout, enabling better use of space.

Its advanced zoning capabilities allow floor-by-floor installation so that each floor can be occupied quickly upon completion. And, because the outdoor units are lightweight, there's no need to reinforce floors, reducing both installation time and costs.


Daikin VRV's wide range of stylish and discreet indoor units provide configurations for every retail space, giving you the benefit of our highly efficient technology, whatever the design of your store. Wall mounted units matched to your interior meet both aesthetic and energy needs while also supporting the look and feel of your brand and preserving floor space. Slim ducted and concealed units blend almost unseen into your store, while floor standing units with small footprints preserve floor space, fitting unobtrusively into recesses or under windows.

Retail



Quiet condensing units help minimize external noise pollution. Small footprint units can easily be located on the rooftop without the use of heavy equipment or reinforcement to the building.

Restaurants

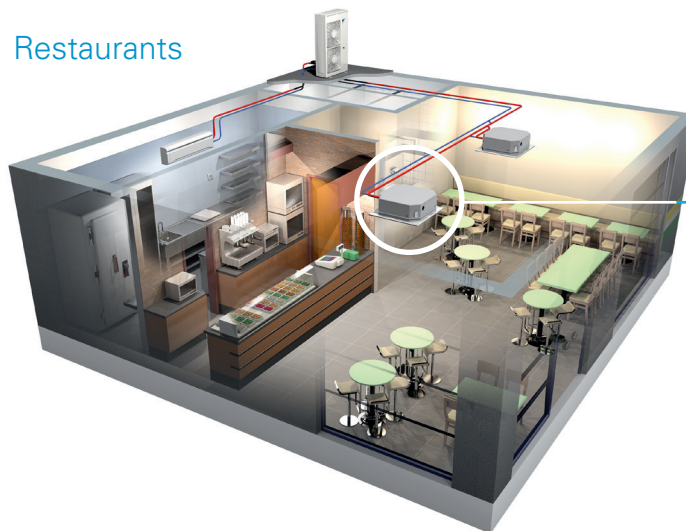

Round Flow Sensing Cassette

Ideal for open plan applications such as retail and restaurants where adaptive comfort control is preferred. Provides excellent comfort level, energy efficiency, and flexibility due to advanced control functions.

- » True 360° Airflow and three room sensors enables optimized occupant comfort
- » Energy efficient with DC fan motor and auto-logic that adjusts fan speed
- » Optional self-cleaning filter panel to further increase efficiency and reduce maintenance
- » Increased indoor air quality with high efficiency filter options and ventilation connection kit
- » Very flexible with 18 different possible airflow patterns

Many other indoor unit styles are available, including ducted units, all designed to maximize comfort, minimize operating sound and simplify installation and servicing.

The Solution for Residential Applications



RESIDENTIAL

Residential

VRV IV S-series is also an excellent solution when building a new house or renovating and is well suited for use in multi-family or condominium projects. The long piping length allows for multiple floors to be served from one condenser installed outside.

All indoor units come with fan speed control and are quiet — as low as 28 decibels, the equivalent of rustling leaves.

A feature of particular importance for residential applications is the 'night set' mode, which can be set on site to function over a 9 hour period during which operating sound is reduced progressively in three increments of 3dB(A).



Apartments/Condos




Typical residential indoor units options

» Ducted style indoor units



HSP DC Concealed Ducted Unit, for a powerful ducted option



MSP Concealed Ducted Unit, for a lower profile option less than 10" high.



The optional DZK increases the flexibility of the Daikin VRV allowing several separate ducts to supply air to different individually controlled zones (used in combination with HSP DC Concealed Ducted Unit and MSP Concealed Ducted Units).

Single Family Housing



LSP Slim Concealed Ducted Unit, less than 8" height to easily install in soffit or false ceiling.



Multi-Position Air Handling Unit, typical in closet type installation.



Concealed Floor-Standing Unit can easily be installed along an exterior wall — or concealed in an architectural enclosure.

» Duct-free style indoor units



Wall-Mounted Unit allows for simple, cost-effective installation.




Floor-Standing Unit is popular where replacement of old radiators is desired.

VRV IV S-series Features

1 Variable-Speed DC Fan.

High efficiency and low sound levels.

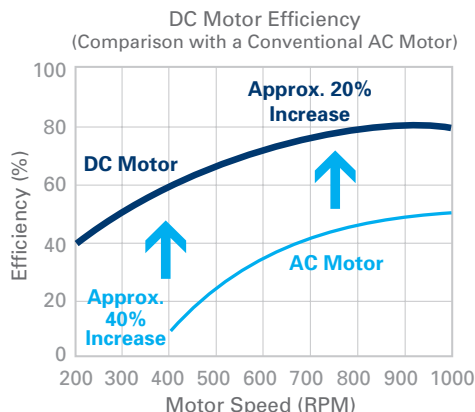

6 Added safety and peace of mind with configurable auto changeover to auxiliary heat.

■ Backed by a best in class 10-Year Parts Limited Warranty and 10-Year Replacement Compressor Limited Warranty*

2 Blue Fin Corrosion Coating.

Hydrophilic coating to help with defrost.


3 7mm Coil. Improved heat exchanger efficiency and compact casing design***.

4 Inverter Board Cooled by Refrigerant Circuit**.

Elimination of condenser fan pressure drop caused by heat sink used on previous generations.

5 New Swing Compressor.

Improved efficiency. Lower sound levels. Increased reliability***.

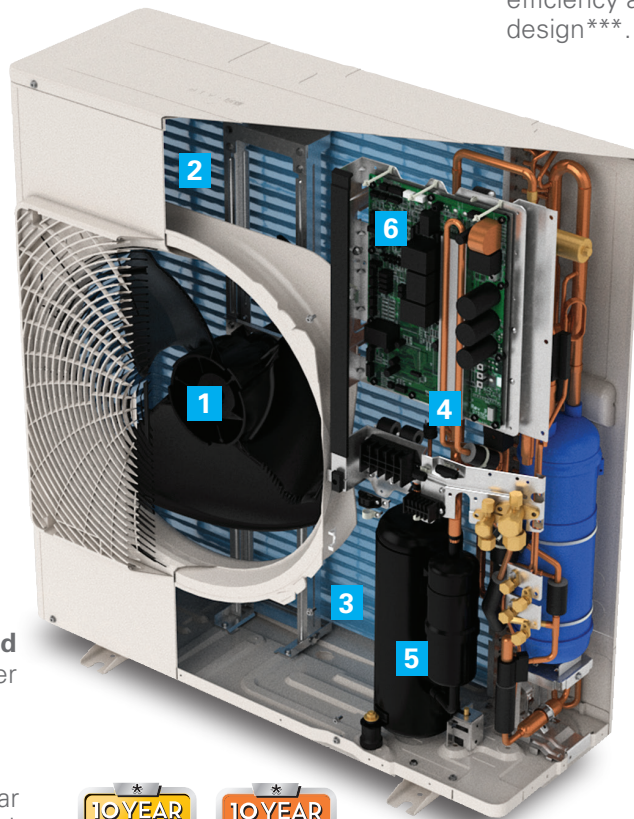

* Complete warranty details available from your local Daikin manufacturer's representative or distributor or online at www.daikincomfort.com.



** Dependent on outdoor unit model


*** Compared to VRV III-S

VRT mode control selection to match user preferences


These charts reflect the operation trend of a VRV system when in normal operation and under VRT control. Actual energy savings through VRT vary based on the building location, load characteristics, occupancy and system usage conditions.

A view of the various VRT modes of operation:


Automatic mode (Default setting on VRV IV)

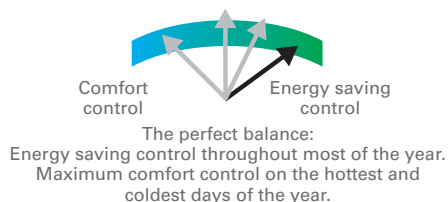

High sensible mode

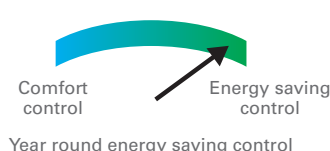


Basic mode (Traditional VRF system)

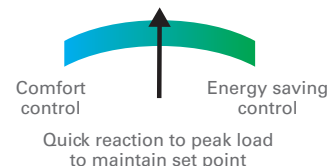


Summary of operating characteristics of each VRT mode of operation:


Automatic mode (Default setting on VRV IV)

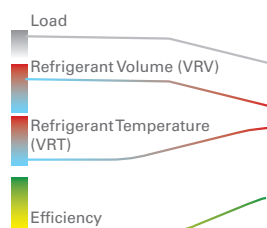

High sensible mode

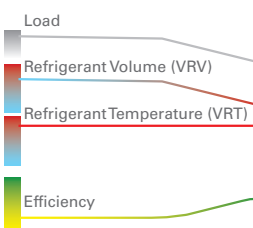


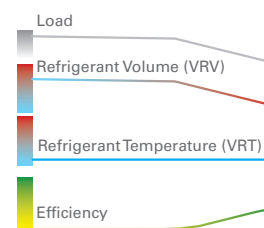


Basic mode (Traditional VRF system)



VRV IV S-series Features


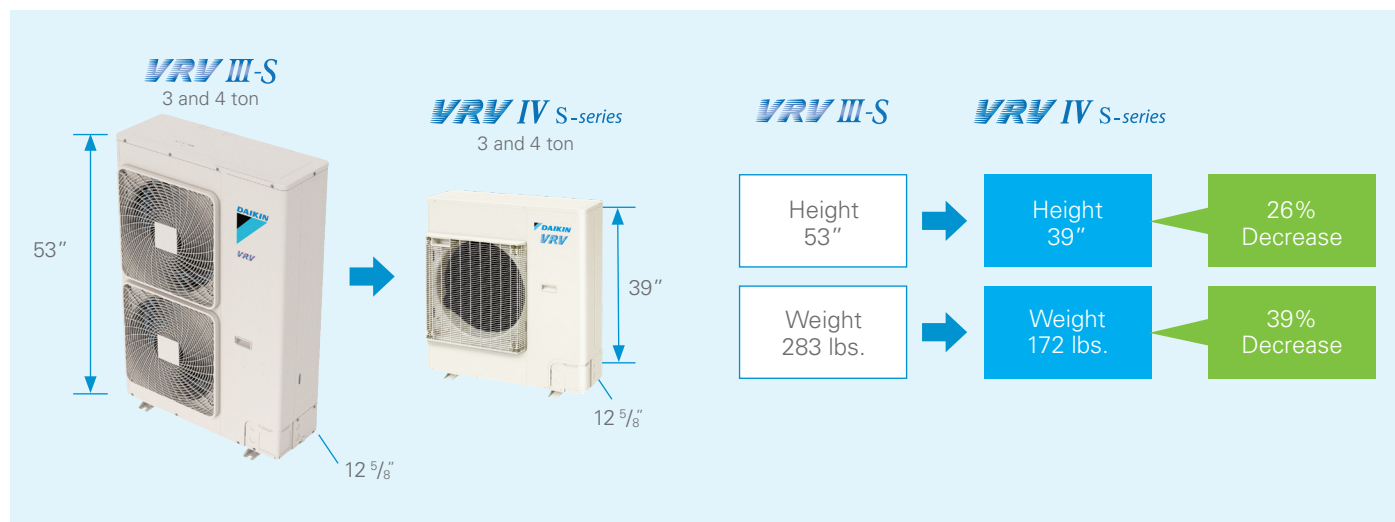
Compact and lightweight design



Model Name			RXTQ36TBVJUB	RXTQ48TBVJUB	RXTQ60TBVJUB
ODU Style	Fan Type		Single Fan	Single Fan	Double Fan
					
PERFORMANCE	Nominal Cooling Capacity	BTU/H	36,000	48,000	57,500
	Nominal Heating Capacity	BTU/H	40,000	52,000	57,000
	Operation Range Cooling	°F DB	23 to 122		
	Operation Range Heating	°F WB	-4 to 60		
	Power	V/P/HZ	208-230/1/60		
	Sound Pressure Level @ 3ft	DB(A)	58	58	57
REFRIGERANT PIPING	Refrigerant		R-410A		
	Refrigerant Quantity	LBS	6.4	7.5	7.9
	Liquid Pipe (Main Line)	IN	3/8	3/8	3/8
	Suction Gas Pipe (Main Line)	IN	5/8	5/8	3/4
	Vertical Drop	FT	3 Ton = 115 / 4 Ton = 131		
	Vertical Rise	FT	3 Ton = 115 / 4 Ton = 131		
	Maximum vertical pipe length between IDU	FT	33	49	49
	Actual Pipe Length (Equivalent Length)	FT	164 (213)	230 (295)	394 (492)*
	Total Piping Length	FT	820	984	984
CONNECTION RATIO	Connectable Indoor Unit Ratio	%	50-130		
	Number of Indoor Units	QTY	6	8	9
UNIT	Outdoor Unit Size	(HXWxD)	39 x 37 x 12-5/8	39 x 37 x 12-5/8	52-15/16 x 35-7/16 x 12-5/8
FAN	Weight	LBS.	172	176	225
	Airflow	CFM	2682	2682	3741
ELECTRICAL	Fan Motor Output and Quantity	KW	0.20 x 1	0.20 x 1	0.070 X 2
	Maximum Over Current Protection (MOP)	A	20	35	35
	Minimum Circuit Amps (MCA)	A	16.5	29.1	29.1
COMPRESSOR	Rated Load Amps (RLA)	A	15.3	19.0	23.2
	Compressor Type	TYPE	Daikin Swing	Daikin Swing	Daikin Swing
	Capacity Control	%	14-100	14-100	14-100

* Application rules apply. Refer to Installation Manual for further details.

Expansion of cooling up to 122°F
Effective heating operation to -4°F WB

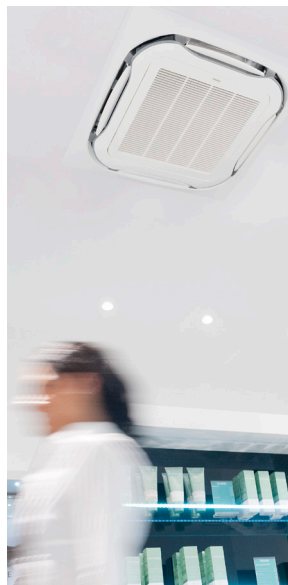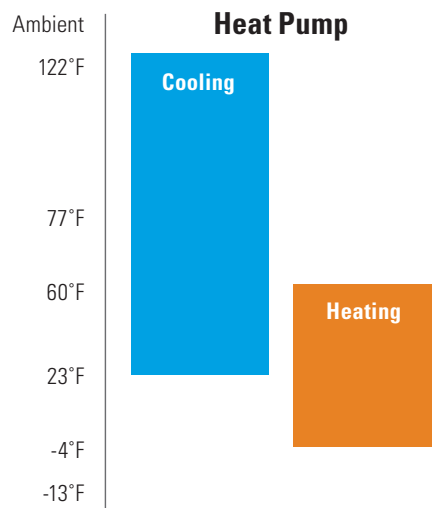

Certified Performance Data

Outdoor Unit	Indoor Units Combination	Rated Cooling Capacity (Btu/hr)	EER2	SEER2	Rated Heating Capacity @ 47°F (Btu/h)	COP	Rated Heating Capacity @ 17°F (Btu/h)	COP	HSPF2
			95°F			47°F		17°F	
RXTQ36TBVJUB*	Non-Ducted Indoor Units	34,200	12.0	23.0	37,000	4.1	23,600	3.0	9.6
	Ducted Indoor Units		9.2	15.3		3.3	24,600	2.6	8.5
	Mixed Ducted and Non-Ducted Indoor Units		10.4	19.2		3.7	24,200	2.8	9.1
RXTQ48TBVJUB*	Non-Ducted Indoor Units	45,500	10.3	20.0	47,500	4.0	31,000	3.0	9.5
	Ducted Indoor Units		7.9	14.6	46,000	3.3	30,200	2.6	8.3
	Mixed Ducted and Non-Ducted Indoor Units		8.9	17.3	47,000	3.7	30,600	2.8	8.9
RXTQ60TBVJUB*	Non-Ducted Indoor Units	57,500	9.8	20.5	57,000	3.8	37,000	3.2	9.5
	Ducted Indoor Units		8.5	15.5		3.5	36,400	2.7	8.5
	Mixed Ducted and Non-Ducted Indoor Units		9.1	18.0		3.6	36,800	2.9	9.0

Installation Requirements*

Installation Space

Diagram [1] illustrates the required clearance for an outdoor unit installed against a wall. The unit is shown with a minimum clearance of 4(100) or more on the left, right, and front sides. Diagram [2] illustrates the required clearance for an outdoor unit installed in a corner. The unit is shown with a minimum clearance of 4(100) or more on all four sides (left, right, front, and back).

Piping Specifications

Length (Ft.)

3 Ton 4 Ton 5 Ton

Linear actual piping between condensing unit and furthest located fan coil unit

164

230

394**

Linear piping between condensing unit and furthest located fan coil unit (equivalent)

213

295

492

Total "one-way" piping in the complete piping network

820

984

Vertical Separation
ODU & IDU

ODU above IDU

115**

131**

165

ODU below IDU

115**

131**

130

Vertical Separation IDU & IDU


33

49

Linear piping between first REFNET* and furthest located fan coil unit

131

**Application rules apply. Refer to Installation Manual for further details.

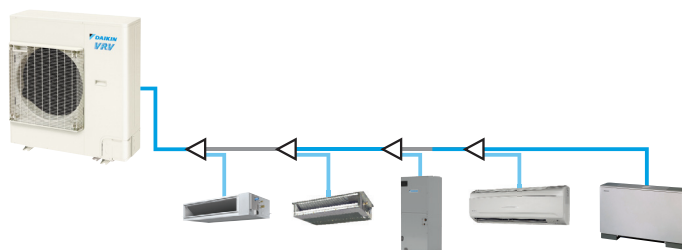














* For complete details, refer to the installation manual.

Accessories

VRV IV S-series Accessories		RXTQ36TAVJ9	RXTQ48TAVJU	RXTQ60TAVJU
ABC I/P PCB Kit		-	BRP2A82	
REFNET Headers		KHRP26M22HA (Max. 4 branch)		
		KHRP26M33HA (Max. 8 branch)		
REFNET Joints		KHRP26A22T9		
Fixture for Preventing Overturning		KPT60B160		
Wind Baffle		KPW5G112		KPW5F80 (2 required per unit)

VRV Indoor Units

Designed for absolute comfort and versatility, Daikin's wide selection of ducted and duct-free indoor units with a sleek and sophisticated design provides zoning flexibility and comfort control for almost any application.

INDOOR UNIT TYPE		CAPACITY													
		MBH TONS	5.8 0.5	7.5 0.6	09 0.75	12 1	15 1.25	18 1.5	24 2	30 2.5	36 3	42 3.5	48 4	54 4.5	60 5
DUCTED	FXMQ_TBVJU HSP DC Concealed Ducted Unit (High Static)			▲ 🔌 🌬️	▲ 🔌 🌬️	▲ 🔌 🌬️	▲ 🔌 🌬️	▲ 🔌 🌬️	▲ 🔌 🌬️	▲ 🔌 🌬️	▲ 🔌 🌬️		▲ 🔌 🌬️	▲ 🔌 🌬️	
	FXSQ_TBVJU MSP Concealed Ducted Unit (Medium Static)		▲ 🔌 🌬️	▲ 🔌 🌬️	▲ 🔌 🌬️	▲ 🔌 🌬️	▲ 🔌 🌬️	▲ 🔌 🌬️	▲ 🔌 🌬️	▲ 🔌 🌬️	▲ 🔌 🌬️		▲ 🔌 🌬️	▲ 🔌 🌬️	
	FXDQ_MVJU LSP Slim Concealed Ducted Unit (Low Static)			▲ 🔌 🌬️	▲ 🔌 🌬️	▲ 🔌 🌬️		▲ 🔌 🌬️	▲ 🔌 🌬️						
	FXTQ_TAVJU Multi-Position Air Handling Unit (Upflow, Downflow, Horizontal Left and Horizontal Right)				▲ 🔌 🌬️	▲ 🔌 🌬️		▲ 🔌 🌬️	▲ 🔌 🌬️	▲ 🔌 🌬️	▲ 🔌 🌬️	▲ 🔌 🌬️	▲ 🔌 🌬️	▲ 🔌 🌬️	▲ 🔌 🌬️
	FXNQ_MVJU9 Concealed Floor- Standing Unit			▲ 🔌 🌬️	▲ 🔌 🌬️	▲ 🔌 🌬️		▲ 🔌 🌬️	▲ 🔌 🌬️						
DUCT-FREE	FXFQ_TVJU Round Flow Sensing Cassette, Ceiling Mounted	 		▲ 🔌 🌬️	▲ 🔌 🌬️	▲ 🔌 🌬️	▲ 🔌 🌬️	▲ 🔌 🌬️	▲ 🔌 🌬️	▲ 🔌 🌬️	▲ 🔌 🌬️		▲ 🔌 🌬️		
	FXUQ_PAVJU 4-Way Blow Ceiling-Suspended Cassette							▲ 🔌 🌬️	▲ 🔌 🌬️	▲ 🔌 🌬️	▲ 🔌 🌬️				
	FXZQ_TBVJU VISTA 2x2 Ceiling Mounted Cassette		▲ 🔌 🌬️	▲ 🔌 🌬️	▲ 🔌 🌬️	▲ 🔌 🌬️	▲ 🔌 🌬️	▲ 🔌 🌬️							
	FXEQ_PVJU Ceiling-Mounted Cassette (Single Flow)			▲ 🔌 🌬️	▲ 🔌 🌬️	▲ 🔌 🌬️	▲ 🔌 🌬️	▲ 🔌 🌬️	▲ 🔌 🌬️						
	FXHQ_MVJU Ceiling-Suspended Unit					▲ 🔌 🌬️			▲ 🔌 🌬️		▲ 🔌 🌬️				
	FXAQ_PVJU Wall-Mounted Unit			▲ 🔌 🌬️	▲ 🔌 🌬️	▲ 🔌 🌬️		▲ 🔌 🌬️	▲ 🔌 🌬️						
	FXLQ_MVJU9 Floor-Standing Unit			▲ 🔌 🌬️	▲ 🔌 🌬️	▲ 🔌 🌬️		▲ 🔌 🌬️	▲ 🔌 🌬️						


▲ Comfort cooling/heating 🔌 Condensate pump standard 🌬️ Outside air connection possible

DZK (Daikin Zoning Kit)



The optional DZK increases the flexibility of the Daikin VRV systems in both residential and commercial applications by adding a Zoning Box to an indoor unit fan coil (FXMQ-P or FXSQ series), allowing several separate ducts to supply air to different individually controlled zones. The DZK BACnet® Hub module will work with any Building Management System compatible with BACnet®/IP or BACnet®/MSTP.

DZK Zoning Box for
FXMQ_PB and
FXSQ indoor units



Daikin BACnet
HUB4 Module



DZK Wired, Wireless, and
Wireless Lite thermostat
options



Daikin VRV controls

Optimized for VRV technology, Daikin controls provide highly scalable solutions for all applications and budgets. VRV controls offer solutions to meet your project controls needs from individual zone control with local controllers to centrally controlling the building with Centralized Controllers and/or interfacing with Building Management Systems (BMS) for comfort control in an easily managed and operated system.

PROJECT REQUIREMENTS	DAIKIN VRV CONTROLS									
	 Madoka Remote Controller	 DKN Cloud Wi-Fi Adaptor	 Navigation Remote Controller	 Daikin One+ Smart Thermostat	 Adaptive Touch Controller	 Intelligent Touch Manager	 BACnet™ Interface	 LonWorks® Interface	 Modbus® Interface	 BACnet™ MSTP Adaptor
Individual zone control	■	■	■	■	■	■	■	■	■	■
Independent cool and heat set-points	■	■	■	■	■	■				
Individual zone control with weekly programmable scheduling		■	■	■	■	■		■	■	■
Basic On/Off control for indoor units	■	■	■	■	■	■	■	■	■	■
Advanced multi-zone control of small to medium size projects						■	■	■	■	■
Advanced multi-zone control of large commercial projects						■	■	■		
Advanced multi-zone control with scheduling logic and calendar						■				
Automatic cooling/heating changeover for heat pump systems	■	■	■	■	■	■				
Single input batch shutdown of all connected air handlers						■	■	■	■	■
Web browser control and monitoring						■	■	■	■	■
E-mail notification of system alarms and equipment malfunctions						■	■	■	■	■
Multiple tenant power billing for shared condenser applications						■				
Temperature set-point range restrictions	■		■	■	■	■	■	■	■	■
Graphical user interface with floor plan layout						■	■	■	■	■
Start/stop control of ancillary building systems*						■	■	■	■	■
Daikin VRV integration with BACnet based automation systems					■	■	■			■
Daikin VRV integration with LonWorks based automation systems								■		
Daikin VRV integration with Modbus based automation systems		■							■	
Wi-Fi option remote access through smartphone app		■		■						
View service data on a graphical view										
Trend and Plot (Current and Past Data)										
Adjust outdoor unit field settings remotely										
Multisite Monitoring										
Automated Reports										

* Requires WAGO® IO module (for use with iTM only).

■ Native application or feature for this device. ■ Dependent upon capabilities of the third party energy management system

Why choose Daikin?

Daikin is the world leader when it comes to heating and cooling. Thanks to our constant innovation in comfort, energy efficiency, control and reliability, we define the benchmarks for quality within the industry.

Expert reviews from our most important critics

Daikin offers a wide selection of choices for energy-efficient indoor comfort. As a worldwide leader in heating and cooling technology, Daikin is also a highly-rated brand. See for yourself at www.daikincomfort.com/reviews.

Before purchasing an appliance in this document, read important information about its estimated annual energy consumption, yearly operating cost, or energy efficiency rating that is available from your retailer.

WARNINGS:

- » Always use a licensed installer or contractor to install this product. Do not try to install the product yourself. Improper installation can result in water or refrigerant leakage, electrical shock, fire or explosion.
- » Use only those parts and accessories supplied or specified by Daikin. Ask a licensed contractor to install those parts and accessories. Use of unauthorized parts and accessories or improper installation of parts and accessories can result in water or refrigerant leakage, electrical shock, fire or explosion.
- » Read the User's Manual carefully before using this product. The User's Manual provides important safety instructions and warnings. Be sure to follow these instructions and warnings.
- » For any inquiries, contact your local Daikin sales office.



Our continuing commitment to quality products may mean a change in specifications without notice.

© 2023 **DAIKIN COMFORT TECHNOLOGIES NORTH AMERICA, INC.**

Houston, Texas · USA · www.daikincomfort.com or www.daikinac.com

CB-VRVIV-S_12-23