

R-32 PACKAGED HEAT PUMP 13.4 SEER2 / 6.7 HSPF2 2 TO 5 TONS



■ Contents

Nomenclature.....	2
Product Specifications.....	3
Expanded Cooling Data	4
Expanded Heating Data.....	18
Airflow.....	20
Heat Kit Electrical Specs	22
Dimensions	23
Wiring Diagram	24
Accessories	28

R32

■ Standard Features

- Energy-efficient scroll compressor
- All-aluminum evaporator coil
- Multi-Speed ECM indoor blower motor
- Liquid-line filter drier
- Convertible airflow: horizontal or downflow
- Copper tube/aluminum fin condenser coils
- Compressor sound blanket
- Electric heat kit available as a field-installed option
- AHRI Certified; UL Listed

■ Cabinet Features

- Heavy-gauge galvanized-steel cabinet with attractive UV-resistant powder-paint finish
- Fully insulated air-handling compartment with convenient access panels
- Aluminum foil-facing internal insulation reinforced with fiberglass scrim
- Meets cabinet air leakage requirements when tested in accordance with ASHRAE standard 193
- Louvered condenser coil protection
- One footprint for all tonnages
- When properly anchored, meets the 2023 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)



* Complete warranty details available from your local dealer or at www.daikincomfort.com. To receive the 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Additional requirements for annual maintenance are required for the Unit Replacement Limited Warranty. Online registration and some of the additional requirements are not required in Florida, California, or Québec. The duration of warranty coverage in Texas and Florida differs in some cases. Other limitations and exclusions apply; refer to complete warranty details for a full list of limitations and exclusions.

	D	P	3	H	M	36	3	1	A	A		
	1	2	3	4	5	6,7	8	9	10	11		
Brand											Minor Revision	
D - Daikin Brand											A	
Product Category											Major Revision	
P - Packaged Unit											A	
Efficiency											Electrical	
3 - 13.4 SEER2											1 - 208/230 V, 1 Phase, 60 Hz	
5 - 15.2 SEER2											3 208/230 V, 3 Phase, 60 Hz	
Unit Type											Refrigerant	
G - Air Conditioner											3 – R-32	
H - Heat Pump											4 – R-410A	
Airflow											Nominal Capacity	
M - Multi-Position											24 - 2 tons	42 - 3½ tons
H - Horizontal											30 - 2½ tons	48 - 4 tons
											36 - 3 tons	60 - 5 tons

	DP3HM 2431	DP3HM 3031	DP3HM 3631	DP3HM 4231	DP3HM 4831	DP3HM 6031	DP3HM 3633	DP3HM 4833	DP3HM 6033
COOLING CAPACITY									
Total BTU/h	24,000	27,400	33,400	39,000	46,500	55,000	33,400	46,500	55,000
Sensible BTU/h	18,480	21,920	25,718	29,250	34,875	39,600	25,718	34,875	39,600
SEER2	13.4	13.4	13.4	13.4	13.4	13.4	-	-	-
EER2	10.6	10.6	10.6	10.6	10.6	10.6	-	-	-
HEATING CAPACITY									
BTU/h (47°F)	22,000	26,000	31,400	37,000	45,500	54,000	31,400	45,500	54,000
C.O.P. (47°F)	3.56	3.60	3.68	3.62	3.40	3.50	3.68	3.40	3.50
BTU/h (17°F)	12,800	15,800	16,800	22,600	25,200	33,800	16,800	25,200	33,800
C.O.P. (17°F)	2.32	2.26	2.20	2.40	2.22	2.38	2.20	2.22	2.38
HSPF2	6.70	6.70	6.70	6.70	6.70	6.70	-	-	-
EVAPORATOR FAN / COIL									
Type	ECM	ECM	ECM	ECM	ECM	ECM	ECM	ECM	ECM
Wheel (D x W)	10 x 9	10 x 9	10 x 9	10 x 9	10 x 9	10 x 9	10 x 9	10 x 9	10 x 9
Indoor Nominal CFM	800	1025	1150	1250	1600	1750	1150	1600	1750
No. of Speeds	5	5	5	5	5	5	5	5	5
Indoor Blower FLA	3.8	3.8	3.8	5.4	5.4	7	3.8	5.4	7
HORSEPOWER	1/2	1/2	1/2	3/4	3/4	1	1/2	3/4	1
Face Area (ft ²)	4.55	4.55	4.55	6.20	6.20	6.2	4.55	6.20	6.2
Rows Deep / Fins per Inch	4/14	4/14	4/14	4/14	4/14	4/14	4/14	4/14	4/14
Metering Device Type	Piston	Piston	Piston	Piston	Piston	TXV	Piston	Piston	TXV
Drain Size (NPT)	¾"	¾"	¾"	¾"	¾"	¾"	¾"	¾"	¾"
Refrigerant Charge (oz.)	99	94	96	110	153	129	96	153	129
Condenser Fan / Coil									
OUTDOOR FAN FLA	1.4	1.4	1.4	1.4	2	2	1.4	2	2
Horsepower	1/4	1/4	1/4	1/4	1/3	1/3	1/4	1/3	1/3
Blade Diameter	22	22	22	22	22	22	22	22	22
Face Area (ft ²)	12.08	12.08	12.08	15.09	19.05	19.05	12.08	19.05	19.05
ROWS DEEP / FINS PER INCH	2/16	2/16	2/16	2/16	2/16	2/16	2/16	2/16	2/16
Metering Device Type	Piston	Piston	Piston	Piston	Piston	TXV	Piston	Piston	TXV
Compressor									
Type	Scroll	Scroll	Scroll	Scroll	Scroll	Scroll	Scroll	Scroll	Scroll
Stage	Single	Single	Single	Single	Single	Two	Single	Single	Two
RLA	10.62	12.8	16.45	16.58	19.39	27.07	10.56	14.08	15.17
LRA	56.5	76	88	121.5	138.4	178	97.5	120.4	140
Electrical Data									
Phase	1	1	1	1	1	1	3	3	3
Voltage (Frequency 60 Hz)	208-230	208-230	208-230	208-230	208-230	208-230	208-230	208-230	208-230
Min. Circuit Ampacity	18.48	21.2	25.76	27.52	31.64	42.84	18.4	25	27.96
MAX. OVERCURRENT PROTECTION	25	30	40	40	50	60	25	35	40
Decibels	76	76	80	80	79	80	80	79	80
Operating/Shipping Weights (lbs)	380 / 390	385 / 395	385 / 420	450 / 480	460 / 490	470 / 500	385 / 420	460 / 490	470 / 500

Notes:

Always check the S&R plate for electrical data on the unit being installed.

Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.

Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

Horizontal duct covers along with either a "Downflow Conversion Kit" or a "Downflow Economizer" is mandatory for all downflow installations.

See Accessories table for appropriate kit number(s)

kW = Total system power
Amps = outdoor unit amps (comp + fans)

		OUTDOOR AMBIENT TEMPERATURE																																			
		65°F					75°F					85°F					ENTERING INDOOR WET BULB TEMPERATURE										105°F					115°F					
IDB	AIRFLOW	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	
80	MBh	24.3	24.6	25.4	26.5	27.1	24.1	24.4	25.1	26.3	27.3	23.4	23.8	24.5	25.6	26.2	22.3	22.7	23.4	24.5	25.1	21.6	21.9	22.7	23.8	24.2	20.4	20.7	21.4	22.5	23.0	20.1	20.8	22.0	22.5		
	S/T	1.00	0.70	0.56	0.4	1.00	0.71	0.57	0.4	1.00	0.73	0.60	0.5	1.00	0.73	0.60	1.00	1.00	1.00	0.62	0.5	1.00	1.00	1.00	0.64	0.5	1.00	1.00	1.00	0.69	0.5	1.00	1.00	0.69	0.5		
	ΔT	27.41	25.70	22.50	19.2	27.36	25.65	22.45	19.1	27.61	25.89	22.69	19.4	27.35	25.63	22.43	19.1	27.12	25.40	22.20	18.9	27.12	25.40	22.20	18.9	28.19	26.48	23.28	20.0	27.12	25.40	22.20	18.9	28.19	26.48	23.28	20.0
	kW	1.61	1.61	1.61	1.6	1.81	1.81	1.80	1.8	2.03	2.02	2.02	2.0	2.26	2.26	2.26	2.3	2.53	2.53	2.52	2.5	2.84	2.84	2.84	2.9	2.84	2.84	2.84	2.9	2.84	2.84	2.84	2.84	2.84	2.84	2.9	
	Amps	6.09	6.08	6.06	6.1	6.94	6.93	6.92	7.0	7.89	7.89	7.87	7.9	8.92	8.92	8.90	9.0	10.08	10.07	10.06	10.1	11.43	11.42	11.41	11.5	11.43	11.42	11.41	11.5	11.43	11.42	11.41	11.5	11.43	11.42	11.41	11.5
	Hi PR	246	247	249	253.1	285	286	288	292.2	326	327	329	333.1	370	371	373	377.2	418	419	420	424.8	468	469	471	475.5	468	469	471	475.5	468	469	471	475.5	468	469	471	475.5
	Lo PR	126	128	131	136.7	134	136	139	144.5	141	143	146	151.3	147	148	152	157.1	152	154	157	162.7	160	161	164	169.8	160	161	164	169.8	160	161	164	169.8	160	161	164	169.8
	MBh	24.9	25.2	26.0	27.1	27.1	24.7	25.0	25.7	26.8	27.8	24.0	24.4	25.1	26.2	26.8	22.9	23.3	24.0	25.1	25.1	21.6	21.9	22.7	23.8	24.2	20.4	20.7	21.4	22.5	23.0	20.1	20.8	22.0	22.5		
	S/T	1.00	0.86	0.72	0.6	1.00	0.86	0.73	0.6	1.00	0.86	0.73	0.6	1.00	0.86	0.73	1.00	1.00	1.00	0.77	0.6	1.00	1.00	1.00	0.79	0.6	1.00	1.00	1.00	0.79	0.6	1.00	1.00	0.79	0.6		
	ΔT	25.07	23.36	20.15	16.8	25.02	23.31	20.11	16.8	25.26	23.55	20.35	17.0	25.01	23.29	20.09	16.8	24.78	23.06	19.86	16.5	24.78	23.06	19.86	16.5	25.85	24.14	20.93	17.6	24.78	23.06	19.86	16.5	25.85	24.14	20.93	17.6
	kW	1.63	1.63	1.63	1.6	1.83	1.83	1.83	1.8	2.05	2.05	2.04	2.1	2.29	2.29	2.28	2.3	2.55	2.55	2.55	2.6	2.86	2.86	2.86	2.9	2.86	2.86	2.86	2.9	2.86	2.86	2.86	2.86	2.86	2.86	2.86	2.9
	Amps	6.19	6.18	6.16	6.2	7.04	7.03	7.02	7.1	7.99	7.99	7.97	8.0	9.03	9.02	9.00	9.1	10.18	10.17	10.16	10.2	11.53	11.52	11.51	11.6	11.53	11.52	11.51	11.6	11.53	11.52	11.51	11.6	11.53	11.52	11.51	11.6
1000	Hi PR	250	252	253	257.6	290	291	292	296.6	330	332	333	337.6	375	376	377	381.7	422	423	425	429.2	473	474	476	479.9	473	474	476	479.9	473	474	476	479.9	473	474	476	479.9
	Lo PR	130	132	135	140.4	138	139	143	148.2	145	146	150	155.0	150	152	155	160.7	156	158	161	166.4	163	165	168	173.5	163	165	168	173.5	163	165	168	173.5	163	165	168	173.5
	MBh	25.7	26.1	26.8	27.9	27.9	25.5	25.9	26.6	27.7	28.7	24.9	25.2	25.9	27.1	27.1	23.8	24.1	24.8	26.0	26.0	22.4	22.8	23.5	24.6	24.2	21.2	21.6	22.3	23.4	23.8	21.2	21.6	22.3	23.4	23.8	
	S/T	1.00	0.90	0.76	0.6	1.00	0.91	0.77	0.6	1.00	0.91	0.77	0.6	1.00	0.91	0.77	1.00	1.00	1.00	0.82	0.7	1.00	1.00	1.00	0.84	0.7	1.00	1.00	1.00	0.84	0.7	1.00	1.00	0.84	0.7		
	ΔT	23.43	21.71	18.51	15.2	23.38	21.66	18.46	15.1	23.62	21.90	18.70	15.4	23.36	21.65	18.44	15.1	23.13	21.42	18.22	14.9	24.21	22.49	19.29	16.0	24.21	22.49	19.29	16.0	24.21	22.49	19.29	16.0	24.21	22.49	19.29	16.0
	kW	1.65	1.65	1.64	1.7	1.85	1.84	1.84	1.9	2.07	2.06	2.06	2.1	2.30	2.30	2.30	2.3	2.57	2.57	2.56	2.6	2.88	2.88	2.88	2.9	2.88	2.88	2.88	2.9	2.88	2.88	2.88	2.88	2.88	2.88	2.88	2.9
	Amps	6.26	6.25	6.23	6.3	7.11	7.10	7.09	7.2	8.06	8.06	8.04	8.1	9.10	9.09	9.07	9.1	10.25	10.24	10.23	10.3	11.60	11.59	11.58	11.6	11.60	11.59	11.58	11.6	11.60	11.59	11.58	11.6	11.60	11.59	11.58	11.6
	Hi PR	255	256	257	261.7	294	295	296	300.8	335	336	337	341.7	379	380	381	385.8	426	427	429	433.3	477	478	480	484.1	477	478	480	484.1	477	478	480	484.1	477	478	480	484.1
	Lo PR	135	136	139	144.9	142	144	147	152.6	149	151	154	159.4	155	157	160	165.2	161	162	165	170.8	168	169	172	177.9	168	169	172	177.9	168	169	172	177.9	168	169	172	177.9
85	MBh	24.7	25.0	25.8	26.9	27.5	24.5	24.8	25.6	26.7	27.7	23.1	23.8	24.9	25.5	26.0	22.7	23.1	23.8	24.9	25.5	22.0	22.3	23.1	24.2	20.8	21.1	21.8	23.0	23.4	20.2	20.5	21.3	22.4	22.8	23.8	
	S/T	1.00	0.80	0.67	0.5	1.00	0.81	0.67	0.5	1.00	0.81	0.67	0.5	1.00	0.81	0.67	1.00	1.00	1.00	0.72	0.6	1.00	1.00	1.00	0.8	1.00	1.00	1.00	0.8	1.00	1.00	1.00	0.8	1.00	1.00	0.8	
	ΔT	30.78	29.06	25.86	22.5	30.73	29.02	25.81	22.5	30.97	29.26	26.06	22.7	30.71	29.00	25.80	22.5	30.48	28.77	25.57	22.3	28.14	26.43	23.23	19.9	29.22	27.50	24.30	21.0	28.14	26.43	23.23	19.9	29.22	27.50	24.30	21.0
	kW	1.61	1.61	1.61	1.6	1.81	1.81	1.81	1.8	2.03	2.03	2.03	2.0	2.27	2.27	2.26	2.3	2.53	2.53	2.53	2.5	2.84	2.84	2.84	2.9	2.84	2.84	2.84	2.9	2.84	2.84	2.84	2.84	2.84	2.84	2.84	2.9
	Amps	6.10	6.10	6.08	6.1	6.96	6.95	6.93	7.0	7.91	7.90	7.89	8.0	8.94	8.93	8.92	9.0	10.09	10.09	10.07	10.1	11.45	11.44	11.43	11.5	11.45	11.44	11.43	11.5	11.45	11.44	11.43	11.5	11.45	11.44	11.43	11.5
	Hi PR	247	248	250	254.3	286	287	289	293.4	327	328	330	334.3	371	372	374	378.4	419	420	422	425.9	470	471	472	476.6	470	471	472	476.6	470	471	472	476.6	470	471	472	476.6
	Lo PR	128	130	133	138.7	136	138	141	146.4	143	145	148	153.2	149	150	154	159.0	154	156	159	164.6	161	163	166	171.7	161	163	166	171.7	161	163	166	171.7	161	163	166	171.7
	MBh	25.3	25.6	26.4	27.5	27.5	25.1	25.4	26.1	27.3	28.3	24.4	24.8	25.5	26.6	26.6	23.3	23.7	24.4	25.5	25.5	22.0	22.3	23.1	24.2	20.8	21.1	21.8	23.0	23.4	20.2	20.5	21.3	22.4	22.8	23.8	
	S/T	1.00	0.96	0.82	0.7	1.00	0.96	0.82	0.7	1.00	0.96	0.82	0.7	1.00	0.96	0.82	1.00	1.00	1.00	0.87	0.7	1.00	1.00	1.00	0.8	1.00	1.00	1.00	0.8	1.00	1.00	1.00	0.8	1.00	1.00	0.8	
	ΔT	28.44	26.72	23.52	20.2	28.39	26.68	23.47	20.2	28.63	26.92	23.71	20.4	28.37	26.66	23.46	20.1	28.14	26.43	23.23	19.9	28.14	26.43	23.23	19.9	29.22	27.50	24.30	21.0	28.14	26.43	23.23	19.9	29.22	27.50	24.30	21.0
	kW	1.64	1.64	1.63	1.6	1.83	1.83	1.83	1.8	2.05	2.05	2.05	2.1	2.29	2.29	2.29	2.3	2.56	2.56	2.55	2.6	2.87	2.87	2.87	2.9	2.87	2.87	2.87	2.9	2.87	2.87	2.87	2.87	2.87	2.87	2.87	2.9
	Amps	6.20	6.20	6.18	6.2	7.06	7.05	7.03	7.1	8.01	8.00	7.99	8.1	9.04	9.03	9.02	9.1	10.19	10.19	10.17	10.2	11.55	11.54	11.53	11.6	11.55	11.54	11.53	11.6	11.55	11.54	11.53	11.6	11.55	11.54	11.53	11.6
1000	Hi PR	252	253	254	258.7	291	292	293	297.8	332	333	334	338.7	376	377	379	382.8	423	424	426	430.4	474	475	477	481.1												

		OUTDOOR AMBIENT TEMPERATURE																							
		65°F				75°F				85°F				95°F				105°F				115°F			
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
70	MBh	27.6	28.0	28.9	-	27.4	27.8	28.6	-	26.7	27.1	27.9	-	25.4	25.8	26.6	-	23.9	24.3	25.1	-	22.5	22.9	23.7	-
	S/T	0.57	0.49	0.35	-	0.57	0.49	0.35	-	0.60	0.52	0.38	-	1.00	0.54	0.40	-	1.00	0.56	0.42	-	1.00	0.62	0.48	-
	ΔT	19.49	17.78	14.58	-	19.45	17.73	14.53	-	19.69	17.97	14.77	-	19.43	17.72	14.51	-	19.20	17.49	14.28	-	20.27	18.56	15.36	-
	kW	1.84	1.84	1.83	-	2.06	2.06	2.06	-	2.32	2.31	2.31	-	2.59	2.59	2.58	-	2.89	2.89	2.89	-	3.25	3.25	3.25	-
	Amps	6.87	6.86	6.85	-	7.85	7.85	7.83	-	8.95	8.94	8.93	-	10.14	10.13	10.11	-	11.46	11.46	11.44	-	13.02	13.01	13.00	-
	Hi PR	254	255	257	-	295	296	298	-	337	338	340	-	383	384	386	-	432	433	435	-	484	486	487	-
	Lo PR	126	127	131	-	134	135	138	-	140	142	145	-	146	148	151	-	152	153	157	-	159	160	164	-
	MBh	28.2	28.6	29.5	-	28.0	28.4	29.2	-	27.3	27.7	28.5	-	26.0	26.4	27.2	-	24.5	24.9	25.7	-	23.1	23.5	24.3	-
	S/T	0.70	0.62	0.48	-	0.71	0.63	0.49	-	1.00	0.65	0.51	-	1.00	0.67	0.53	-	1.00	0.70	0.56	-	1.00	1.00	0.61	-
	ΔT	17.50	15.79	12.59	-	17.46	15.74	12.54	-	17.70	15.98	12.78	-	17.44	15.73	12.52	-	17.21	15.50	12.30	-	18.28	16.57	13.37	-
1200	kW	1.86	1.86	1.85	-	2.09	2.08	2.08	-	2.34	2.34	2.33	-	2.61	2.61	2.61	-	2.92	2.91	2.91	-	3.27	3.27	3.27	-
	Amps	6.97	6.96	6.94	-	7.95	7.94	7.93	-	9.05	9.04	9.02	-	10.24	10.23	10.21	-	11.56	11.55	11.54	-	13.12	13.11	13.09	-
	Hi PR	258	259	261	-	299	300	302	-	341	342	344	-	387	388	390	-	436	437	439	-	488	489	491	-
	Lo PR	129	131	134	-	137	138	142	-	144	145	148	-	149	151	154	-	155	157	160	-	162	164	167	-
	MBh	28.9	29.3	30.1	-	28.6	29.0	29.8	-	27.9	28.3	29.1	-	26.6	27.0	27.9	-	25.1	25.5	26.3	-	23.7	24.1	24.9	-
	S/T	0.74	0.66	0.52	-	0.75	0.67	0.53	-	1.00	0.70	0.55	-	1.00	0.72	0.57	-	1.00	0.74	0.60	-	1.00	1.00	0.65	-
	ΔT	16.34	14.63	11.42	-	16.29	14.58	11.38	-	16.54	14.82	11.62	-	16.28	14.56	11.36	-	16.05	14.33	11.13	-	17.12	15.41	12.20	-
	kW	1.87	1.87	1.87	-	2.10	2.10	2.09	-	2.35	2.35	2.35	-	2.62	2.62	2.62	-	2.93	2.93	2.92	-	3.29	3.29	3.28	-
	Amps	7.03	7.02	7.00	-	8.01	8.00	7.98	-	9.11	9.10	9.08	-	10.29	10.29	10.27	-	11.62	11.61	11.59	-	13.18	13.17	13.15	-
	Hi PR	261	262	264	-	302	303	305	-	344	345	347	-	390	391	393	-	439	440	442	-	491	492	494	-
	Lo PR	132	134	137	-	140	141	145	-	147	148	151	-	152	154	157	-	158	159	163	-	165	167	170	-
75	MBh	27.7	28.0	28.9	30.2	27.4	27.8	28.6	29.9	26.7	27.1	27.9	29.2	25.4	25.8	26.7	27.9	23.9	24.3	25.1	26.4	22.5	22.9	23.7	25.0
	S/T	0.70	0.62	0.48	0.3	1.00	0.63	0.49	0.3	1.00	0.66	0.51	0.4	1.00	0.68	0.53	0.4	1.00	0.70	0.56	0.4	1.00	1.00	0.61	0.5
	ΔT	23.26	21.55	18.35	15.0	23.22	21.50	18.30	15.0	23.46	21.74	18.54	15.2	23.20	21.49	18.28	15.0	22.97	21.26	18.05	14.7	24.04	22.33	19.13	15.8
	kW	1.84	1.83	1.83	1.8	2.06	2.06	2.06	2.1	2.31	2.31	2.31	2.3	2.59	2.59	2.58	2.6	2.89	2.89	2.89	2.9	3.25	3.25	3.24	3.3
	Amps	6.86	6.86	6.84	6.9	7.85	7.84	7.82	7.9	8.94	8.94	8.92	9.0	10.13	10.12	10.11	10.2	11.46	11.45	11.43	11.5	13.01	13.01	12.99	13.1
	Hi PR	255	256	258	262.0	295	296	298	302.4	337	338	340	344.8	383	384	386	390.4	432	433	435	439.5	485	486	488	492.0
	Lo PR	126	128	131	136.2	134	135	138	143.9	140	142	145	150.7	146	148	151	156.4	152	153	157	162.1	159	160	164	169.1
	MBh	28.3	28.7	29.5	30.8	28.0	28.4	29.2	30.5	27.3	27.7	28.5	29.8	26.0	26.4	27.3	28.5	24.5	24.9	25.7	27.0	23.1	23.5	24.3	25.6
	S/T	0.84	0.76	0.61	0.5	1.00	0.76	0.62	0.5	1.00	0.79	0.65	0.5	1.00	0.81	0.67	0.5	1.00	1.00	0.69	0.5	1.00	1.00	0.75	0.6
	ΔT	21.27	19.56	16.36	13.0	21.23	19.51	16.31	13.0	21.47	19.75	16.55	13.2	21.21	19.50	16.29	13.0	20.98	19.27	16.07	12.7	22.05	20.34	17.14	13.8
1200	kW	1.86	1.86	1.85	1.9	2.08	2.08	2.08	2.1	2.34	2.33	2.33	2.3	2.61	2.61	2.60	2.6	2.91	2.91	2.91	2.9	3.27	3.27	3.27	3.3
	Amps	6.96	6.95	6.94	7.0	7.95	7.94	7.92	8.0	9.04	9.03	9.02	9.1	10.23	10.22	10.20	10.3	11.56	11.55	11.53	11.6	13.11	13.10	13.09	13.2
	Hi PR	259	260	261	266.0	299	300	302	306.4	341	342	344	348.7	387	388	390	394.3	436	437	439	443.5	489	490	492	496.0
	Lo PR	129	131	134	139.4	137	138	142	147.1	144	145	149	153.9	149	151	154	159.7	155	157	160	165.3	162	164	167	172.3
	MBh	28.9	29.3	30.1	31.4	28.6	29.0	29.9	31.1	27.9	28.3	29.1	30.4	26.7	27.0	27.9	29.1	25.1	25.5	26.3	27.6	23.7	24.1	24.9	26.2
	S/T	0.88	0.80	0.66	0.5	1.00	0.81	0.66	0.5	1.00	0.83	0.69	0.5	1.00	0.85	0.71	0.6	1.00	1.00	0.73	0.6	1.00	1.00	0.79	0.6
	ΔT	20.11	18.40	15.19	11.9	20.06	18.35	15.15	11.8	20.31	18.59	15.39	12.1	20.05	18.33	15.13	11.8	19.82	18.10	14.90	11.6	20.89	19.18	15.97	12.7
	kW	1.87	1.87	1.87	1.9	2.10	2.10	2.09	2.1	2.35	2.35	2.34	2.4	2.62	2.62	2.62	2.6	2.93	2.93	2.92	2.9	3.29	3.28	3.28	3.3
	Amps	7.02	7.01	6.99	7.1	8.00	7.99	7.98	8.1	9.10	9.09	9.07	9.1	10.29	10.28	10.26	10.3	11.61	11.61	11.59	11.7	13.17	13.16	13.14	13.2
	Hi PR	261	263	264	268.9	302	303	305	309.3	344	345	347	351.6	390	391	393	397.2	439	440	442	446.4	491	493	494	498.9
	Lo PR	132	134	137	142.3	140	141	145	150.0	147	148	151	156.8	152	154	157	162.6	158	160	163	168.2	165	167	170	175.2

IDB: Entering Indoor Dry Bulb Temperature

High & low pressures are measured at the liquid & suction access fittings.

Shaded area reflects ACCA (TVA) conditions

kW = Total system power
Amps = outdoor unit amps (comp. + fans)

		OUTDOOR AMBIENT TEMPERATURE																																			
		65°F					75°F					85°F					95°F					105°F					115°F										
IDB	AIRFLOW	59	63	67	71	71	59	63	67	71	71	59	63	67	71	71	59	63	67	71	71	59	63	67	71	71	59	63	67	71	71	59	63	67	71	71	
80	MBh	27.8	28.2	29.0	30.3	30.3	27.5	27.9	28.8	30.0	30.0	26.8	27.2	28.0	29.3	29.3	25.6	26.0	26.8	28.1	28.1	24.0	24.4	25.3	26.5	26.5	22.6	23.0	23.9	25.1	25.1	22.6	23.0	23.9	25.1	25.1	
	S/T	1.00	0.76	0.61	0.5	0.5	1.00	0.76	0.62	0.5	0.5	1.00	0.79	0.65	0.5	0.5	1.00	1.00	0.67	0.5	0.5	1.00	1.00	0.69	0.5	0.5	1.00	1.00	0.74	0.6	0.6	1.00	1.00	0.74	0.6	0.6	
	ΔT	27.06	25.35	22.14	18.8	18.8	27.01	25.30	22.10	18.8	18.8	27.25	25.54	22.34	19.0	19.0	27.00	25.28	22.08	18.8	18.8	26.77	25.05	21.85	18.5	18.5	27.84	26.13	22.92	19.6	19.6	27.84	26.13	22.92	19.6	19.6	
	kW	1.84	1.84	1.83	1.8	1.8	2.06	2.06	2.06	2.1	2.1	2.32	2.31	2.31	2.3	2.3	2.59	2.59	2.58	2.6	2.6	2.89	2.89	2.89	2.9	2.9	3.25	3.25	3.25	3.3	3.3	3.25	3.25	3.25	3.3	3.3	
	Amps	6.87	6.86	6.85	6.9	6.9	7.85	7.84	7.83	7.9	7.9	8.95	8.94	8.92	9.0	9.0	10.14	10.13	10.11	10.2	10.2	11.46	11.46	11.44	11.5	11.5	13.02	13.01	12.99	13.1	13.1	13.02	13.01	12.99	13.1	13.1	
	Hi PR	255	256	258	262.5	262.5	296	297	298	302.9	302.9	338	339	341	345.2	345.2	383	385	386	390.8	390.8	433	434	436	440.0	440.0	485	486	488	492.5	492.5	485	486	488	492.5	492.5	
	Lo PR	127	128	131	136.7	136.7	134	136	139	144.5	144.5	171	174	178	187	187	147	148	152	157.0	157.0	152	154	157	162.6	162.6	159	161	164	169.7	169.7	159	161	164	169.7	169.7	
	MBh	28.4	28.8	29.6	30.9	30.9	28.2	28.5	29.4	30.7	30.7	27.4	27.8	28.7	29.9	29.9	26.2	26.6	27.4	28.7	28.7	24.6	25.0	25.9	27.1	27.1	23.2	23.6	24.5	25.7	25.7	23.2	23.6	24.5	25.7	25.7	
	S/T	1.00	0.89	0.75	0.6	0.6	1.00	0.90	0.75	0.6	0.6	1.00	1.00	0.78	0.6	0.6	1.00	1.00	0.80	0.6	0.6	1.00	1.00	0.82	0.7	0.7	1.00	1.00	1.00	0.7	0.7	1.00	1.00	1.00	0.7	0.7	
	ΔT	25.07	23.36	20.15	16.8	16.8	25.02	23.31	20.11	16.8	16.8	25.26	23.55	20.35	17.0	17.0	25.01	23.29	20.09	16.8	16.8	24.78	23.06	19.86	16.5	16.5	25.85	24.14	20.93	17.6	17.6	25.85	24.14	20.93	17.6	17.6	
	kW	1.86	1.86	1.85	1.9	1.9	2.09	2.08	2.08	2.1	2.1	2.34	2.34	2.33	2.3	2.3	2.61	2.61	2.61	2.6	2.6	2.92	2.91	2.91	2.9	2.9	3.27	3.27	3.27	3.3	3.3	3.27	3.27	3.27	3.3	3.3	
	Amps	6.97	6.96	6.94	7.0	7.0	7.95	7.94	7.93	8.0	8.0	9.05	9.04	9.02	9.1	9.1	10.23	10.23	10.21	10.3	10.3	11.56	11.55	11.54	11.6	11.6	13.12	13.11	13.09	13.2	13.2	13.12	13.11	13.09	13.2	13.2	
	Hi PR	259	260	262	266.4	266.4	299	301	302	306.9	306.9	342	343	345	349.2	349.2	387	389	390	394.8	394.8	437	438	440	444.0	444.0	489	490	492	496.4	496.4	489	490	492	496.4	496.4	
	Lo PR	130	131	135	140.0	140.0	137	139	142	147.7	147.7	144	146	149	154.5	154.5	150	152	155	160.2	160.2	156	157	160	165.8	165.8	163	164	167	172.9	172.9	163	164	167	172.9	172.9	
85	MBh	29.0	29.4	30.3	31.5	31.5	28.8	29.2	30.0	31.3	31.3	28.0	28.4	29.3	30.5	30.5	26.8	27.2	28.0	29.3	29.3	25.3	25.7	26.5	27.8	27.8	23.9	24.3	25.1	26.4	26.4	23.9	24.3	25.1	26.4	26.4	
	S/T	1.00	0.93	0.79	0.6	0.6	1.00	0.94	0.80	0.6	0.6	1.00	1.00	0.82	0.7	0.7	1.00	1.00	0.84	0.7	0.7	1.00	1.00	0.87	0.7	0.7	1.00	1.00	1.00	0.8	0.8	1.00	1.00	1.00	0.8	0.8	
	ΔT	23.91	22.19	18.99	15.7	15.7	23.86	22.15	18.94	15.6	15.6	24.10	22.39	19.18	15.9	15.9	23.84	22.13	18.93	15.6	15.6	23.61	21.90	18.70	15.4	15.4	24.69	22.97	19.77	16.5	16.5	24.69	22.97	19.77	16.5	16.5	
	kW	1.87	1.87	1.87	1.9	1.9	2.10	2.10	2.09	2.1	2.1	2.35	2.35	2.35	2.4	2.4	2.62	2.62	2.62	2.6	2.6	2.93	2.93	2.92	2.9	2.9	3.29	3.29	3.28	3.3	3.3	3.29	3.29	3.28	3.3	3.3	
	Amps	7.02	7.02	7.00	7.1	7.1	8.01	8.00	7.98	8.1	8.1	9.10	9.10	9.08	9.2	9.2	10.29	10.28	10.27	10.3	10.3	11.62	11.61	11.59	11.7	11.7	13.17	13.17	13.15	13.2	13.2	13.17	13.17	13.15	13.2	13.2	
	Hi PR	262	263	265	269.3	269.3	302	303	305	309.7	309.7	345	346	348	352.1	352.1	390	391	393	397.7	397.7	439	441	442	446.9	446.9	492	493	495	499.3	499.3	492	493	495	499.3	499.3	
	Lo PR	133	134	137	142.9	142.9	140	142	145	150.6	150.6	147	149	152	157.4	157.4	153	154	158	163.1	163.1	159	160	163	168.7	168.7	166	167	170	175.8	175.8	166	167	170	175.8	175.8	
	85	MBh	28.3	28.7	29.5	30.8	30.8	28.0	28.4	29.2	30.5	30.5	27.3	27.7	28.5	29.8	29.8	26.0	26.4	27.3	28.5	28.5	24.5	24.9	25.7	27.0	27.0	23.1	23.5	24.3	25.6	25.6	23.1	23.5	24.3	25.6	25.6
		S/T	1.00	0.86	0.72	0.6	0.6	1.00	1.00	0.73	0.6	0.6	1.00	1.00	0.75	0.6	0.6	1.00	1.00	0.77	0.6	0.6	1.00	1.00	1.00	0.8	0.8	1.00	1.00	1.00	0.7	0.7	1.00	1.00	1.00	0.7	0.7
		ΔT	30.43	28.71	25.51	22.2	22.2	30.38	28.66	25.46	22.1	22.1	30.62	28.91	25.70	22.4	22.4	30.36	28.65	25.45	22.1	22.1	30.13	28.42	25.22	21.9	21.9	31.21	29.49	26.29	23.0	23.0	31.21	29.49	26.29	23.0	23.0
		kW	1.84	1.84	1.84	1.9	1.9	2.07	2.07	2.06	2.1	2.1	2.32	2.32	2.31	2.3	2.3	2.59	2.59	2.59	2.6	2.6	2.90	2.90	2.89	2.9	2.9	3.26	3.25	3.25	3.3	3.3	3.26	3.25	3.25	3.3	3.3
		Amps	6.89	6.88	6.86	6.9	6.9	7.87	7.86	7.85	7.9	7.9	8.97	8.96	8.94	9.0	9.0	10.16	10.15	10.13	10.2	10.2	11.48	11.47	11.46	11.5	11.5	13.04	13.03	13.01	13.1	13.1	13.04	13.03	13.01	13.1	13.1
		Hi PR	256	257	259	263.7	263.7	297	298	300	304.1	304.1	339	340	342	346.4	346.4	385	386	388	392.0	392.0	434	435	437	441.2	441.2	486	487	489	493.7	493.7	486	487	489	493.7	493.7
		Lo PR	128	130	133	138.6	138.6	136	138	141	146.4	146.4	143	145	148	153.2	153.2	149	150	153	158.9	158.9	154	156	159	164.5	164.5	161	163	166	171.6	171.6	161	163	166	171.6	171.6
MBh		28.9	29.3	30.1	31.4	31.4	28.6	29.0	29.8	31.1	31.1	27.9	28.3	29.1	30.4	30.4	26.6	27.0	27.9	29.1	29.1	25.1	25.5	26.3	27.6	27.6	23.7	24.1	24.9	26.2	26.2	23.7	24.1	24.9	26.2	26.2	
S/T		1.00	1.00	0.85	0.7	0.7	1.00	1.00	0.86	0.7	0.7	1.00	1.00	0.89	0.7	0.7	1.00	1.00	0.91	0.8	0.8	1.00	1.00	1.00	0.8	0.8	1.00	1.00	1.00	0.8	0.8	1.00	1.00	1.00	0.8	0.8	
ΔT		28.44	26.72	23.52	20.2	20.2	28.39	26.68	23.47	20.2	20.2	28.63	26.92	23.71	20.4	20.4	28.37	26.66	23.46	20.1	20.1	28.14	26.43	23.23	19.9	19.9	29.22	27.50	24.30	21.0	21.0	29.22	27.50	24.30	21.0	21.0	
kW		1.86	1.86	1.86	1.9	1.9	2.09	2.09	2.08	2.1	2.1	2.34	2.34	2.34	2.4	2.4	2.62	2.61	2.61	2.6	2.6	2.92	2.92	2.91	2.9												

		OUTDOOR AMBIENT TEMPERATURE																											
		65°F					75°F					85°F					95°F					105°F				115°F			
		ENTERING INDOOR WET BULB TEMPERATURE																											
		IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
70	900	MBh	33.7	34.2	35.2	-	33.4	33.9	34.9	-	32.5	33.0	34.0	-	31.0	31.5	32.5	34.0	-	29.1	29.6	30.6	-	27.4	27.9	28.9	-		
		S/T	0.55	0.47	0.33	-	0.56	0.48	0.34	-	0.58	0.50	0.37	-	0.60	0.52	0.39	-	-	1.00	0.55	0.41	-	1.00	0.60	0.46	-		
		ΔT	19.47	17.76	14.55	-	19.42	17.71	14.51	-	19.66	17.95	14.75	-	19.41	17.69	14.49	-	-	19.18	17.46	14.26	-	20.25	18.54	15.33	-		
		kW	2.23	2.22	2.22	-	2.51	2.50	2.50	-	2.82	2.82	2.81	-	3.16	3.15	3.15	-	-	3.53	3.53	3.53	-	3.98	3.97	3.97	-		
	1150	Amps	8.26	8.25	8.23	-	9.47	9.46	9.44	-	10.83	10.82	10.80	-	12.30	12.29	12.27	-	-	13.94	13.93	13.91	-	15.87	15.86	15.84	-		
		Hi PR	267	268	270	-	310	311	313	-	354	355	357	-	402	403	405	-	-	454	455	457	-	509	510	512	-		
		Lo PR	123	125	128	-	131	132	136	-	137	139	142	-	143	145	148	-	-	149	150	153	-	155	157	160	-		
		MBh	34.4	34.9	35.9	-	34.1	34.6	35.6	-	33.2	33.7	34.7	-	31.7	32.2	33.2	-	-	29.8	30.3	31.3	-	28.1	28.6	29.6	-		
	1400	S/T	0.68	0.60	0.46	-	0.68	0.60	0.47	-	0.71	0.63	0.49	-	1.00	0.65	0.51	-	-	1.00	0.67	0.53	-	1.00	0.72	0.59	-		
		ΔT	17.50	15.79	12.59	-	17.46	15.74	12.54	-	17.70	15.98	12.78	-	17.44	15.73	12.52	-	-	17.21	15.50	12.30	-	18.28	16.57	13.37	-		
kW		2.25	2.25	2.25	-	2.53	2.53	2.53	-	2.85	2.84	2.84	-	3.18	3.18	3.18	-	-	3.56	3.56	3.55	-	4.00	4.00	4.00	-			
Amps		8.38	8.37	8.35	-	9.59	9.58	9.56	-	10.95	10.94	10.92	-	12.42	12.41	12.39	-	-	14.06	14.05	14.03	-	15.99	15.98	15.96	-			
75	900	Hi PR	271	273	274	-	314	315	317	-	358	360	361	-	406	407	409	-	-	458	459	461	-	513	514	516	-		
		Lo PR	126	128	131	-	134	135	139	-	141	142	145	-	146	148	151	-	-	152	153	156	-	159	160	163	-		
		MBh	35.4	35.9	36.9	-	35.1	35.6	36.6	-	34.2	34.7	35.7	-	32.7	33.2	34.2	-	-	30.8	31.3	32.3	-	29.1	29.6	30.6	-		
		S/T	0.72	0.64	0.51	-	0.73	0.65	0.51	-	1.00	0.67	0.54	-	1.00	0.69	0.56	-	-	1.00	0.72	0.58	-	1.00	1.00	0.63	-		
	1150	ΔT	16.05	14.34	11.14	-	16.01	14.29	11.09	-	16.25	14.53	11.33	-	15.99	14.28	11.07	-	-	15.76	14.05	10.84	-	16.83	15.12	11.92	-		
		kW	2.27	2.27	2.27	-	2.55	2.55	2.55	-	2.87	2.86	2.86	-	3.20	3.20	3.20	-	-	3.58	3.58	3							

IDB		AIRFLOW		OUTDOOR AMBIENT TEMPERATURE																																			
				65°F						75°F						85°F						95°F						105°F						115°F					
				ENTERING INDOOR WET BULB TEMPERATURE																																			
				59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71												
80	900	MBh	33.9	34.4	35.4	36.9	33.6	34.1	35.1	36.6	32.7	33.2	34.2	35.7	31.2	31.7	32.7	34.2	29.3	29.8	30.8	32.4	27.6	28.1	29.1	30.7													
		S/T	1.00	0.73	0.59	0.4	1.00	0.74	0.60	0.5	1.00	0.76	0.62	0.5	1.00	0.78	0.64	0.5	1.00	1.00	0.67	0.5	1.00	1.00	0.72	0.6													
		ΔT	27.04	25.32	22.12	18.8	26.99	25.27	22.07	18.8	27.23	25.52	22.31	19.0	26.97	25.26	22.06	18.7	26.74	25.03	21.83	18.5	27.82	26.10	22.90	19.6													
		kW	2.23	2.22	2.22	2.2	2.51	2.50	2.50	2.5	2.82	2.82	2.81	2.8	3.16	3.15	3.15	3.2	3.53	3.53	3.53	3.5	3.98	3.97	3.97	4.0													
		Amps	8.25	8.24	8.22	8.3	9.47	9.46	9.44	9.5	10.83	10.82	10.80	10.9	12.30	12.29	12.27	12.4	13.94	13.93	13.91	14.0	15.87	15.86	15.84	15.9													
		Hi PR	268	269	271	275.8	310	312	314	318.2	355	356	358	362.7	403	404	406	410.6	455	456	458	462.3	510	511	513	517.4													
		Lo PR	124	125	129	133.8	131	133	136	141.4	138	140	143	148.0	144	145	148	153.6	149	151	154	159.1	156	158	161	166.0													
		MBh	34.6	35.1	36.1	37.7	34.3	34.8	35.8	37.4	33.4	33.9	34.9	36.5	31.9	32.4	33.4	35.0	30.0	30.5	31.5	33.1	28.3	28.8	29.8	31.4													
		S/T	1.00	0.86	0.72	0.6	1.00	0.86	0.73	0.6	1.00	0.89	0.75	0.6	1.00	1.00	0.77	0.6	1.00	1.00	0.79	0.6	1.00	1.00	0.84	0.7													
		ΔT	25.07	23.36	20.15	16.8	25.02	23.31	20.11	16.8	25.26	23.55	20.35	17.0	25.01	23.29	20.09	16.8	24.78	23.06	19.86	16.5	25.85	24.14	20.93	17.6													
1400	kW	2.25	2.25	2.25	2.3	2.53	2.53	2.53	2.5	2.85	2.84	2.84	2.9	3.18	3.18	3.18	3.2	3.56	3.56	3.55	3.6	4.00	4.00	4.00	4.0														
	Amps	8.37	8.36	8.34	8.4	9.59	9.58	9.56	9.7	10.95	10.94	10.92	11.0	12.42	12.41	12.39	12.5	14.06	14.05	14.03	14.1	15.99	15.98	15.96	16.0														
	Hi PR	272	273	275	279.9	315	316	318	322.4	359	360	362	366.8	407	408	410	414.7	459	460	462	466.4	514	515	517	521.5														
	Lo PR	127	128	132	136.9	134	136	139	144.5	141	143	146	151.1	147	148	151	156.8	152	154	157	162.3	159	161	164	169.1														
	MBh	35.6	36.1	37.1	38.7	35.3	35.8	36.8	38.4	34.4	34.9	35.9	37.5	32.9	33.4	34.4	36.0	31.0	31.5	32.5	34.1	29.3	29.8	30.8	32.4														
	S/T	1.00	0.90	0.76	0.6	1.00	0.91	0.77	0.6	1.00	1.00	0.80	0.7	1.00	1.00	0.82	0.7	1.00	1.00	0.84	0.7	1.00	1.00	1.00	0.7														
	ΔT	23.62	21.91	18.70	15.4	23.57	21.86	18.66	15.3	23.81	22.10	1																											

kW = Total system power
Amps = outdoor unit amps (comp.+ fans)

Shaded area reflects AHRI (TVA) conditions

IDB: Entering Indoor Dry Bulb Temperature
High & low pressures are measured at the liquid & suction access fittings.

IDB		AIRFLOW		OUTDOOR AMBIENT TEMPERATURE																						
				65°F			75°F			85°F			95°F			105°F			115°F							
				ENTERING INDOOR WET BULB TEMPERATURE																						
				59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71			
70	1000	MBh	39.4	40.0	41.2	-	39.1	39.6	40.8	-	38.0	38.6	39.8	-	36.2	36.8	38.0	-	34.1	34.6	35.8	-	32.1	32.6	33.8	-
		S/T	0.55	0.47	0.34	-	0.55	0.48	0.35	-	0.58	0.50	0.37	-	0.60	0.52	0.39	-	1.00	0.54	0.41	-	1.00	0.60	0.46	-
		ΔT	19.28	17.57	14.37	-	19.24	17.52	14.32	-	19.48	17.76	14.56	-	19.22	17.50	14.30	-	18.99	17.27	14.07	-	20.06	18.35	15.15	-
		kW	2.60	2.59	2.59	-	2.92	2.92	2.92	-	3.29	3.29	3.28	-	3.69	3.69	3.68	-	4.13	4.13	4.12	-	4.65	4.65	4.64	-
		Amps	9.88	9.86	9.84	-	11.30	11.29	11.27	-	12.90	12.89	12.86	-	14.62	14.61	14.59	-	16.55	16.54	16.51	-	18.81	18.80	18.78	-
		Hi PR	258	260	261	-	299	301	302	-	342	344	345	-	389	390	392	-	439	440	442	-	492	493	495	-
70	1250	Lo PR	122	124	127	-	130	131	134	-	136	138	141	-	142	143	146	-	147	149	152	-	154	155	159	-
		MBh	40.2	40.8	41.9	-	39.8	40.4	41.6	-	38.8	39.4	40.6	-	37.0	37.6	38.8	-	34.8	35.4	36.6	-	32.9	33.4	34.6	-
		S/T	0.66	0.58	0.45	-	0.66	0.59	0.45	-	0.69	0.61	0.48	-	1.00	0.63	0.50	-	1.00	0.65	0.52	-	1.00	0.71	0.57	-
		ΔT	17.50	15.79	12.59	-	17.46	15.74	12.54	-	17.70	15.98	12.78	-	17.44	15.73	12.52	-	17.21	15.50	12.30	-	18.28	16.57	13.37	-
		kW	2.63	2.62	2.62	-	2.95	2.95	2.95	-	3.32	3.32	3.31	-	3.72	3.71	3.71	-	4.16	4.16	4.15	-	4.68	4.68	4.67	-
		Amps	10.00	9.99	9.97	-	11.43	11.42	11.40	-	13.02	13.01	12.99	-	14.75	14.74	14.71	-	16.68	16.67	16.64	-	18.94	18.93	18.90	-
1500	1500	Hi PR	262	263	265	-	303	304	306	-	346	347	349	-	392	393	395	-	442	443	445	-	495	497	498	-
		Lo PR	125	126	130	-	132	134	137	-	139	140	144	-	144	146	149	-	150	151	155	-	157	158	161	-
		MBh	41.3	41.8	43.0	-	40.9	41.5	42.7	-	39.9	40.4	41.6	-	38.1	38.6	39.8	-	35.9	36.5	37.7	-	33.9	34.5	35.7	-
		S/T	0.70	0.63	0.49	-	0.71	0.63	0.50	-	0.73	0.66	0.52	-	1.00	0.68	0.54	-	1.00	0.70	0.56	-	1.00	0.75	0.61	-
		ΔT	16.16	14.45	11.24	-	16.11	14.40	11.20	-	16.35	14.64	11.44	-	16.10	14.38	11.18	-	15.87	14.15	10.95	-	16.94	15.23	12.02	-
		kW	2.65	2.65	2.64	-	2.98	2.97	2.97	-	3.34	3.34	3.33	-	3.74	3.74	3.73	-	4.18	4.18	4.17	-	4.70	4.70	4.69	-
75	1000	Amps	10.10	10.09	10.06	-	11.53	11.52	11.49	-	13.12	13.11	13.08	-	14.85	14.83	14.81	-	16.77	16.76	16.74	-	19.03	19.02	19.00	-
		Hi PR	266	267	268	-	307	308	309	-	350	351	352	-	396	397	399	-	446	447	449	-	499	500	502	-
		Lo PR	128	130	133	-	136	137	140	-	142	144	147	-	148	149	152	-	153	155	158	-	160	162	165	-
		MBh	39.4	40.0	41.2	43.0	39.1	39.6	40.8	42.6	38.0	38.6	39.8	41.6	36.3	36.8	38.0	39.8	34.1	34.6	35.8	37.6	32.1	32.6	33.8	35.6
		S/T	0.68	0.60	0.47	0.3	0.68	0.61	0.47	0.3	1.00	0.63	0.50	0.4	1.00	0.65	0.52	0.4	1.00	0.67	0.54	0.4	1.00	1.00	0.59	0.4
		ΔT	23.05	21.34	18.14	14.8	23.01	21.29	18.09	14.8	23.25	21.53	18.33	15.0	22.99	21.27	18.07	14.8	22.76	21.04	17.84	14.5	23.83	22.12	18.92	15.6
1250	1250	kW	2.59	2.59	2.59	2.6	2.92	2.92	2.91	2.9	3.29	3.29	3.28	3.3	3.69	3.68	3.68	3.7	4.13	4.13	4.12	4.1	4.65	4.65	4.64	4.7
		Amps	9.87	9.85	9.83	9.9	11.29	11.28	11.26	11.4	12.89	12.88	12.85	13.0	14.61	14.60	14.58	14.7	16.54	16.53	16.51	16.6	18.80	18.79	18.77	18.9
		Hi PR	259	260	262	266.2	300	301	303	307.2	343	344	346	350.1	389	390	392	396.4	439	440	442	446.3	492	493	495	499.5
		Lo PR	122	124	127	132.0	130	131	134	139.5	136	138	141	146.0	142	143	146	151.6	147	149	152	157.0	154	155	159	163.8
		MBh	40.2	40.8	42.0	43.8	39.9	40.4	41.6	43.4	38.8	39.4	40.6	42.4	37.0	37.6	38.8	40.6	34.9	35.4	36.6	38.4	32.9	33.4	34.6	36.4
		S/T	0.79	0.71	0.58	0.4	0.79	0.72	0.58	0.4	1.00	0.74	0.61	0.5	1.00	0.76	0.63	0.5	1.00	0.78	0.65	0.5	1.00	1.00	0.70	0.6
1500	1500	ΔT	21.27	19.56	16.36	13.0	21.23	19.51	16.31	13.0	21.47	19.75	16.55	13.2	21.21	19.50	16.29	13.0	20.98	19.27	16.07	12.7	22.05	20.34	17.14	13.8
		kW	2.62	2.62	2.62	2.6	2.95	2.95	2.94	3.0	3.32	3.32	3.31	3.3	3.72	3.71	3.71	3.7	4.16	4.16	4.15	4.2	4.68	4.68	4.67	4.7
		Amps	9.99	9.98	9.96	10.1	11.42	11.41	11.39	11.5	13.02	13.00	12.98	13.1	14.74	14.73	14.71	14.8	16.67	16.66	16.63	16.7	18.93	18.92	18.89	19.0
		Hi PR	262	263	265	269.8	303	304	306	310.8	346	347	349	353.8	393	394	396	400.0	442	444	445	449.9	496	497	499	503.1
		Lo PR	125	126	130	134.8	132	134	137	142.3	139	140	144	148.9	145	146	149	154.4	150	151	155	159.9	157	158	161	166.7
		MBh	41.3	41.8	43.0	44.8	40.9	41.5	42.7	44.5	39.9	40.5	41.6	43.4	38.1	38.7	39.9	41.7	35.9	36.5	37.7	39.5	33.9	34.5	35.7	37.5
75	1500	S/T	0.83	0.75	0.62	0.5	1.00	0.76	0.63	0.5	1.00	0.78	0.65	0.5	1.00	0.80	0.67	0.5	1.00	1.00	0.69	0.5	1.00	1.00	0.74	0.6
		ΔT	19.93	18.22	15.01	11.7	19.88	18.17	14.97	11.7	20.12	18.41	15.21	11.9	19.87	18.15	14.95	11.6	19.64	17.92	14.72	11.4	20.71	19.00	15.79	12.5
		kW	2.65	2.64	2.64	2.7	2.97	2.97	2.97	3.0	3.34	3.34	3.33	3.4	3.74	3.73	3.73	3.8	4.18	4.18	4.17	4.2	4.70	4.70	4.69	4.7
		Amps	10.09	10.08	10.05	10.2	11.52	11.51	11.48	11.6	13.11	13.10	13.08	13.2	14.84	14.83	14.80	14.9	16.76	16.75	16.73	16.8	19.03	19.01	18.99	19.1
		Hi PR	266	267	269	273.2	307	308	310	314.3	350	351	353	357.2	396	397	399	403.5	446	447	449	453.4	499	500	502	506.6
		Lo PR	128	130	133	138.2	136	137	140	145.7	142	144	147	152.2	148	149	153	157.8	153	155	158	163.2	160	162	165	170.0
IDB: Entering Indoor Dry Bulb Temperature				Shaded area reflects ACCA (TVA) conditions																		kW = Total system power				
High & low pressures are measured at the liquid & suction access fittings.				Amos = outdoor unit amos (comp.+ fans)																						

IDB		AIRFLOW		OUTDOOR AMBIENT TEMPERATURE																							
				65°F				75°F				85°F				95°F				105°F				115°F			
				ENTERING INDOOR WET BULB TEMPERATURE																							
59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
80	1000	MBh	39.6	40.2	41.4	43.2	39.3	39.8	41.0	42.8	38.2	38.8	40.0	41.8	36.5	37.0	38.2	40.0	34.3	34.8	36.0	37.8	32.3	32.9	34.0	35.8	
		S/T	1.00	0.72	0.59	0.4	1.00	0.73	0.60	0.5	1.00	0.76	0.62	0.5	1.00	0.77	0.64	0.5	1.00	1.00	0.66	0.5	1.00	1.00	0.71	0.6	
		ΔT	26.85	25.13	21.93	18.6	26.80	25.09	21.88	18.6	27.04	25.33	22.13	18.8	26.78	25.07	21.87	18.6	26.55	24.84	21.64	18.3	27.63	25.91	22.71	19.4	
		kW	2.60	2.59	2.59	2.6	2.92	2.92	2.92	2.9	3.29	3.29	3.28	3.3	3.69	3.69	3.68	3.7	4.13	4.13	4.12	4.1	4.65	4.65	4.64	4.7	
		Amps	9.87	9.86	9.84	9.9	11.30	11.29	11.27	11.4	12.90	12.88	12.86	13.0	14.62	14.61	14.59	14.7	16.55	16.54	16.51	16.6	18.81	18.80	18.77	18.9	
	1250	Hi PR	259	260	262	266.6	300	301	303	307.7	343	344	346	350.6	389	391	392	396.9	439	440	442	446.7	492	494	495	500.0	
		Lo PR	123	124	127	132.5	130	132	135	140.0	137	138	141	146.6	142	144	147	152.1	148	149	152	157.6	154	156	159	164.4	
		MBh	40.4	41.0	42.2	44.0	40.1	40.6	41.8	43.6	39.0	39.6	40.8	42.6	37.3	37.8	39.0	40.8	35.1	35.6	36.8	38.6	33.1	33.6	34.8	36.6	
		S/T	1.00	0.83	0.70	0.6	1.00	0.84	0.71	0.6	1.00	0.86	0.73	0.6	1.00	1.00	0.75	0.6	1.00	1.00	0.77	0.6	1.00	1.00	0.82	0.7	
		ΔT	25.07	23.36	20.15	16.8	25.02	23.31	20.11	16.8	25.26	23.55	20.35	17.0	25.01	23.29	20.09	16.8	24.78	23.06	19.86	16.5	25.85	24.14	20.93	17.6	
1500	kW	2.63	2.62	2.62	2.6	2.95	2.95	2.95	3.0	3.32	3.32	3.31	3.3	3.72	3.71	3.71	3.7	4.16	4.16	4.15	4.2	4.68	4.68	4.67	4.7		
	Amps	10.00	9.99	9.97	10.1	11.43	11.42	11.39	11.5	13.02	13.01	12.99	13.1	14.75	14.74	14.71	14.8	16.68	16.66	16.64	16.7	18.94	18.93	18.90	19.0		
	Hi PR	263	264	266	270.3	304	305	307	311.3	347	348	350	354.2	393	394	396	400.5	443	444	446	450.4	496	497	499	503.6		
	Lo PR	125	127	130	135.4	133	134	138	142.9	140	141	144	149.4	145	147	150	155.0	151	152	155	160.4	157	159	162	167.2		
	MBh	41.5	42.0	43.2	45.0	41.1	41.7	42.9	44.7	40.1	40.7	41.8	43.7	38.3	38.9	40.1	41.9	36.1	36.7	37.9	39.7	34.1	34.7	35.9	37.7		
85	1000	S/T	1.00	0.88	0.74	0.6	1.00	0.88	0.75	0.6	1.00	0.91	0.77	0.6	1.00	1.00	0.79	0.7	1.00	1.00	0.81	0.7	1.00	1.00	0.87	0.7	
		ΔT	23.73	22.01	18.81	15.5	23.68	21.96	18.76	15.4	23.92	22.21	19.00	15.7	23.66	21.95	18.75	15.4	23.43	21.72	18.52	15.2	24.51	22.79	19.59	16.3	
		kW	2.65	2.64	2.64	2.7	2.98	2.97	2.97	3.0	3.34	3.34	3.33	3.4	3.74	3.74	3.73	3.8	4.18	4.18	4.17	4.2	4.70	4.70	4.69	4.7	
		Amps	10.10	10.09	10.06	10.2	11.52	11.51	11.49	11.6	13.12	13.11	13.08	13.2	14.84	14.83	14.81	14.9	16.77	16.76	16.74	16.8	19.03	19.02	19.00	19.1	
		Hi PR	266	267	269	273.7	307	308	310	314.7	350	351	353	357.7	396	398	399	404.0	446	447	449	453.8	500	501	503	507.1	
	1250	Lo PR	129	130	133	138.7	136	138	141	146.2	143	144	148	152.8	148	150	153	158.3	154	155	159	163.7	161	162	165	170.6	
		MBh	40.3	40.9	42.0	43.9	39.9	40.5	41.7	43.5	38.9	39.5	40.7	42.5	37.1	37.7	38.9	40.7	35.0	35.5	36.7	38.5	33.0	33.5	34.7	36.5	
		S/T	1.00	0.82	0.69	0.5	1.00	0.83	0.70	0.6	1.00	1.00	0.72	0.6	1.00	1.00	0.74	0.6	1.00	1.00	0.76	0.6	1.00	1.00	1.00	0.7	
		ΔT	30.21	28.50	25.30	22.0	30.17	28.45	25.25	21.9	30.41	28.69	25.49	22.2	30.15	28.43	25.23	21.9	29.92	28.21	25.00	21.7	30.99	29.28	26.08	22.8	
		kW	2.60	2.60	2.59	2.6	2.93	2.93	2.92	2.9	3.30	3.29	3.29	3.3	3.69	3.69	3.69	3.7	4.14	4.13	4.13	4.2	4.66	4.65	4.65	4.7	
1500	Amps	9.90	9.89	9.87	10.0	11.33	11.32	11.29	11.4	12.92	12.91	12.89	13.0	14.65	14.64	14.61	14.7	16.58	16.56	16.54	16.6	18.84	18.83	18.80	18.9		
	Hi PR	260	262	263	267.9	301	303	304	308.9	344	345	347	351.8	391	392	394	398.1	440	442	443	448.0	494	495	497	501.2		
	Lo PR	124	126	129	134.4	132	133	137	141.9	139	140	143	148.4	144	146	149	154.0	150	151	154	159.4	156	158	161	166.2		
	MBh	41.1	41.7	42.8	44.7	40.7	41.3	42.5	44.3	39.7	40.3	41.5	43.3	37.9	38.5	39.7	41.5	35.7	36.3	37.5	39.3	33.8	34.3	35.5	37.3		
	S/T	1.00	0.93	0.80	0.7	1.00	1.00	0.81	0.7	1.00	1.00	0.83	0.7	1.00	1.00	0.85	0.7	1.00	1.00	0.87	0.7	1.00	1.00	1.00	0.8		
1500	ΔT	28.44	26.72	23.52	20.2	28.39	26.68	23.47	20.2	28.63	26.92	23.71	20.4	28.37	26.66	23.46	20.1	28.14	26.43	23.23	19.9	29.22	27.50	24.30	21.0		
	kW	2.63	2.63	2.62	2.6	2.96	2.96	2.95	3.0	3.33	3.32	3.32	3.3	3.72	3.72	3.72	3.7	4.17	4.16	4.16	4.2	4.69	4.68	4.68	4.7		
	Amps	10.03	10.02	9.99	10.1	11.46	11.45	11.42	11.5	13.05	13.04	13.01	13.1	14.78	14.76	14.74	14.8	16.70	16.69	16.67	16.8	18.96	18.95	18.93	19.0		
	Hi PR	264	265	267	271.5	305	306	308	312.5	348	349	351	355.5	394	395	397	401.7	444	445	447	451.6	497	498	500	504.8		
	Lo PR	127	129	132	137.2	135	136	139	144.7	141	143	146	151.3	147	148	152	156.8	152	154	157	162.3	159	161	164	169.1		
1500	MBh	42.2	42.7	43.9	45.7	41.8	42.4	43.5	45.4	40.8	41.3	42.5	44.3	39.0	39.5	40.7	42.5	36.8	37.4	38.6	40.4	34.8	35.4	36.6	38.4		
	S/T	1.00	0.98	0.84	0.7	1.00	1.00	0.85	0.7	1.00	1.00	0.87	0.7	1.00	1.00	0.89	0.8	1.00	1.00	1.00	0.8	1.00	1.00	1.00	0.8		
	ΔT	27.09	25.38	22.18	18.9	27.05	25.33	22.13	18.8	27.29	25.57	22.37	19.1	27.03	25.31	22.11	18.8	26.80	25.08	21.88	18.6	27.87	26.16	22.96	19.6		
	kW	2.65	2.65	2.65	2.7	2.98	2.98	2.97	3.0	3.35	3.35	3.34	3.4	3.75	3.74	3.74	3.8	4.19	4.19	4.18	4.2	4.71	4.71	4.70	4.7		
	Amps	10.12	10.11	10.09	10.2	11.55	11.54	11.52	11.6	13.15	13.13	13.11	13.2	14.87	14.86	14.84	14.9	16.80	16.79	16.76	16.9	19.06	19.05	19.02	19.1		
1500	Hi PR	267	269	270	274.9	308	310	311	316.0	351	353	354	358.9	398	399	401	405.2	448	449	451	455.1	501	502	504	508.3		
	Lo PR	131	132	135	140.6	138	140	143	148.0	145	146	149	154.6	150	152	155	160.1	156	157	160	165.6	163	164	167	172.4		

kW = Total system power
Amps = outdoor unit amps (comp. + fans)

Shaded area reflects AHRI (TVA) conditions

High & low pressures are measured at the liquid & suction access fittings.

IDB: Entering Indoor Dry Bulb Temperature

Amperes = outdoor unit amps (comp + fans)
kW = Total system power

		OUTDOOR AMBIENT TEMPERATURE																							
		65°F				75°F				85°F				95°F				105°F				115°F			
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
80	MBh	47.6	48.2	49.7	51.8	47.2	47.8	49.2	51.4	45.9	46.6	48.0	50.2	43.8	44.5	45.9	48.0	41.2	41.9	43.3	45.4	38.8	39.5	40.9	43.1
	S/T	1.00	0.77	0.64	0.5	1.00	0.78	0.65	0.5	1.00	0.81	0.67	0.5	1.00	1.00	0.69	0.5	1.00	1.00	0.71	0.6	1.00	1.00	0.76	0.6
	ΔT	26.11	24.39	21.19	17.9	26.06	24.34	21.14	17.8	26.30	24.59	21.38	18.1	26.04	24.33	21.13	17.8	25.81	24.10	20.90	17.6	26.89	25.17	21.97	18.7
	kW	3.14	3.13	3.13	3.2	3.52	3.52	3.51	3.5	3.95	3.95	3.94	4.0	4.41	4.41	4.40	4.4	4.93	4.93	4.92	4.9	5.53	5.53	5.53	5.6
	Amps	11.46	11.45	11.42	11.5	13.12	13.11	13.08	13.2	14.98	14.97	14.94	15.1	17.00	16.98	16.95	17.1	19.24	19.23	19.20	19.3	21.88	21.87	21.84	22.0
	Hi PR	275	276	278	283.0	318	320	322	326.3	364	365	367	371.6	413	414	416	420.5	465	466	468	473.1	521	523	525	529.3
	Lo PR	125	126	129	134.7	132	134	137	142.3	139	140	144	148.9	145	146	149	154.5	150	152	155	160.0	157	158	162	166.9
	MBh	48.2	48.9	50.3	52.4	47.8	48.4	49.9	52.0	46.5	47.2	48.6	50.8	44.4	45.1	46.5	48.7	41.8	42.5	43.9	46.1	39.4	40.1	41.5	43.7
	S/T	1.00	0.83	0.70	0.6	1.00	0.84	0.71	0.6	1.00	0.86	0.73	0.6	1.00	1.00	0.75	0.6	1.00	1.00	0.77	0.6	1.00	1.00	0.82	0.7
	ΔT	25.07	23.36	20.15	16.8	25.02	23.31	20.11	16.8	25.26	23.55	20.35	17.0	25.01	23.29	20.09	16.8	24.78	23.06	19.86	16.5	25.85	24.14	20.93	17.6
1700	kW	3.16	3.15	3.15	3.2	3.54	3.54	3.53	3.6	3.97	3.97	3.96	4.0	4.43	4.43	4.42	4.5	4.95	4.95	4.94	5.0	5.55	5.55	5.55	5.6
	Amps	11.54	11.53	11.50	11.6	13.21	13.20	13.17	13.3	15.07	15.06	15.03	15.2	17.08	17.07	17.04	17.2	19.33	19.32	19.29	19.4	21.97	21.96	21.93	22.1
	Hi PR	277	279	281	285.3	321	322	324	328.6	366	367	369	374.0	415	416	418	422.8	468	469	471	475.5	524	525	527	531.7
	Lo PR	127	128	131	136.6	134	136	139	144.1	141	142	145	150.7	146	148	151	156.3	152	153	157	161.8	159	160	163	168.7
	MBh	48.9	49.6	51.0	53.2	48.5	49.2	50.6	52.8	47.3	48.0	49.4	51.5	45.2	45.8	47.2	49.4	42.6	43.2	44.6	46.8	40.2	40.9	42.3	44.4
	S/T	1.00	0.87	0.73	0.6	1.00	0.87	0.74	0.6	1.00	0.90	0.76	0.6	1.00	1.00	0.78	0.6	1.00	1.00	0.81	0.7	1.00	1.00	0.86	0.7
	ΔT	24.20	22.48	19.28	16.0	24.15	22.44	19.24	15.9	24.39	22.68	19.48	16.2	24.13	22.42	19.22	15.9	23.90	22.19	18.99	15.7	24.98	23.26	20.06	16.7
	kW	3.17	3.17	3.16	3.2	3.56	3.55	3.55	3.6	3.98	3.98	3.98	4.0	4.45	4.44	4.44	4.5	4.96	4.96	4.96	5.0	5.57	5.57	5.56	5.6
	Amps	11.62	11.60	11.58	11.7	13.28	13.27	13.24	13.4	15.14	15.13	15.10	15.2	17.15	17.14	17.11	17.2	19.40	19.39	19.36	19.5	22.04	22.03	22.00	22.1
	Hi PR	280	281	283	287.6	323	324	326	330.9	368	370	371	376.2	417	418	420	425.1	470	471	473	477.7	526	527	529	533.9
Lo PR	129	130	133	138.6	136	138	141	146.1	143	144	147	152.8	148	150	153	158.4	154	155	159	163.8	161	162	165	170.7	

1500	MBh	48.4	49.0	50.5	52.6	48.0	48.6	50.0	52.2	46.7	47.4	48.8	51.0	44.6	45.3	46.7	48.8	42.0	42.7	44.1	46.2	39.6	40.3	41.7	43.9
	S/T	1.00	0.87	0.74	0.6	1.00	1.00	0.75	0.6	1.00	1.00	0.77	0.6	1.00	1.00	0.79	0.6	1.00	1.00	0.81	0.7	1.00	1.00	0.86	0.7
	ΔT	29.47	27.76	24.56	21.2	29.43	27.71	24.51	21.2	29.67	27.95	24.75	21.4	29.41	27.69	24.49	21.2	29.18	27.46	24.26	20.9	30.25	28.54	25.34	22.0
	kW	3.14	3.14	3.14	3.2	3.53	3.52	3.52	3.5	3.96	3.95	3.95	4.0	4.42	4.42	4.41	4.4	4.94	4.93	4.93	5.0	5.54	5.54	5.53	5.6
	Amps	11.49	11.48	11.45	11.6	13.16	13.14	13.11	13.2	15.02	15.00	14.97	15.1	17.03	17.01	16.99	17.1	19.28	19.26	19.23	19.4	21.91	21.90	21.87	22.0
	Hi PR	276	278	280	284.3	320	321	323	327.6	365	366	368	372.9	414	415	417	421.8	467	468	470	474.4	523	524	526	530.6
	Lo PR	127	128	131	136.6	134	136	139	144.2	141	142	145	150.8	146	148	151	156.4	152	153	157	161.9	159	160	163	168.7
	MBh	49.0	49.7	51.1	53.2	48.6	49.2	50.7	52.8	47.3	48.0	49.4	51.6	45.2	45.9	47.3	49.5	42.6	43.3	44.7	46.9	40.2	40.9	42.3	44.5
	S/T	1.00	0.93	0.80	0.7	1.00	1.00	0.81	0.7	1.00	1.00	0.83	0.7	1.00	1.00	0.85	0.7	1.00	1.00	0.87	0.7	1.00	1.00	0.92	0.8
	ΔT	28.44	26.72	23.52	20.2	28.39	26.68	23.47	20.2	28.63	26.92	23.71	20.4	28.37	26.66	23.46	20.1	28.14	26.43	23.23	19.9	29.22	27.50	24.30	21.0
1700	kW	3.16	3.16	3.16	3.2	3.55	3.54	3.54	3.6	3.98	3.97	3.97	4.0	4.44	4.44	4.43	4.5	4.96	4.95	4.95	5.0	5.56	5.56	5.55	5.6
	Amps	11.58	11.56	11.54	11.7	13.24	13.23	13.20	13.3	15.10	15.09	15.06	15.2	17.11	17.10	17.07	17.2	19.36	19.35	19.32	19.4	22.00	21.99	21.96	22.1
	Hi PR	279	280	282	286.6	322	323	325	329.9	367	369	370	375.3	416	417	419	424.1	469	470	472	476.8	525	526	528	532.9
	Lo PR	128	130	133	138.4	136	138	141	146.0	143	144	147	152.6	148	150	153	158.2	154	155	158	163.7	161	162	165	170.6
	MBh	49.7	50.4	51.8	54.0	49.3	50.0	51.4	53.6	48.1	48.8	50.2	52.3	46.0	46.6	48.0	50.2	43.4	44.0	45.4	47.6	41.0	41.7	43.1	45.2
	S/T	1.00	0.97	0.83	0.7	1.00	1.00	0.84	0.7	1.00	1.00	0.86	0.7	1.00	1.00	0.88	0.7	1.00	1.00	0.90	0.8	1.00	1.00	0.94	0.8
	ΔT	27.56	25.85	22.65	19.3	27.52	25.80	22.60	19.3	27.76	26.04	22.84	19.5	27.50	25.79	22.58	19.3	27.27	25.56	22.36	19.0	28.34	26.63	23.43	20.1
	kW	3.18	3.18	3.17	3.2	3.56	3.56	3.55	3.6	3.99	3.99	3.98	4.0	4.45	4.45	4.45	4.5	4.97	4.97	4.96	5.0	5.58	5.58	5.57	5.6
	Amps	11.65	11.64	11.61	11.7	13.31	13.30	13.27	13.4	15.17	15.16	15.13	15.3	17.19	17.17	17.15	17.3	19.43	19.42	19.39	19.5	22.07	22.06	22.03	22.2
	Hi PR	281	282	284	288.9	324	325	327	332.2	370	371	373	377.5	418	420	422	426.4	471	472	474	479.0	527	528	530	535.2
Lo PR	130	132	135	140.4	138	140	143	148.0	145	146	149	154.6	150	152	155	160.2	156	157	160	165.7	163	164	167	172.6	

IDB		AIRFLOW		OUTDOOR AMBIENT TEMPERATURE																											
				65°F				75°F				85°F				95°F				105°F				115°F							
				59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71								
				ENTERING INDOOR WET BULB TEMPERATURE																											
59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71								
70	1100	MBh	40.1	40.6	41.8	-	39.7	40.3	41.5	-	38.7	39.2	40.4	-	36.9	37.4	38.6	-	34.6	35.2	36.4	-	32.6	33.2	34.4	-					
		S/T	0.56	0.49	0.36	-	0.57	0.50	0.36	-	0.59	0.52	0.39	-	0.61	0.54	0.41	-	1.00	0.56	0.43	-	1.00	0.61	0.48	-					
		ΔT	18.28	16.62	13.53	-	18.23	16.58	13.49	-	18.46	16.81	13.72	-	18.21	16.56	13.47	-	17.99	16.34	13.25	-	19.03	17.37	14.28	-					
		kW	2.32	2.32	2.32	-	2.61	2.61	2.60	-	2.93	2.93	2.92	-	3.28	3.27	3.27	-	3.66	3.66	3.66	-	4.12	4.12	4.11	-					
		Amps	8.38	8.37	8.35	-	9.62	9.61	9.59	-	11.02	11.01	10.99	-	12.53	12.52	12.49	-	14.21	14.20	14.18	-	16.19	16.18	16.15	-					
	1320	Hi PR	267	268	270	-	309	310	312	-	353	354	356	-	401	402	404	-	452	453	455	-	507	508	510	-					
		Lo PR	123	125	128	-	131	132	135	-	137	139	142	-	143	144	147	-	148	150	153	-	155	157	160	-					
		MBh	40.8	41.3	42.5	-	40.4	41.0	42.2	-	39.4	39.9	41.1	-	37.5	38.1	39.3	-	35.3	35.9	37.1	-	33.3	33.9	35.1	-					
		S/T	0.65	0.57	0.44	-	0.65	0.58	0.45	-	0.68	0.60	0.47	-	1.00	0.62	0.49	-	1.00	0.65	0.51	-	1.00	0.70	0.56	-					
		ΔT	16.89	15.24	12.15	-	16.85	15.19	12.10	-	17.08	15.42	12.34	-	16.83	15.18	12.09	-	16.61	14.95	11.86	-	17.64	15.99	12.90	-					
1600	kW	2.34	2.34	2.34	-	2.63	2.63	2.62	-	2.95	2.95	2.94	-	3.30	3.29	3.29	-	3.68	3.68	3.68	-	4.14	4.14	4.13	-						
	Amps	8.47	8.46	8.44	-	9.71	9.70	9.68	-	11.11	11.10	11.08	-	12.62	12.61	12.58	-	14.30	14.29	14.27	-	16.28	16.27	16.24	-						
	Hi PR	270	271	273	-	312	313	315	-	356	357	359	-	404	405	407	-	455	456	458	-	510	511	513	-						
	Lo PR	125	127	130	-	133	134	138	-	140	141	144	-	145	147	150	-	151	152	155	-	157	159	162	-						
	MBh	41.9	42.5	43.7	-	41.6	42.1	43.3	-	40.5	41.1	42.3	-	38.7	39.3	40.5	-	36.5	37.1	38.3	-	34.5	35.0	36.2	-						
75	1100	S/T	0.69	0.62	0.49	-	0.70	0.62	0.49	-	1.00	0.65	0.52	-	1.00	0.67	0.53	-	1.00	0.69	0.56	-	1.00	0.74	0.61	-					
		ΔT	15.52	13.87	10.78	-	15.48	13.82	10.73	-	15.71	14.06	10.97	-	15.46	13.81	10.72	-	15.24	13.59	10.50	-	16.28	14.62	11.53	-					
		kW	2.32	2.32	2.31	2.3	2.61	2.61	2.60	2.6	2.93	2.93	2.92	2.9	3.27	3.27	3.27	3.3	3.66	3.66	3.65	3.7	4.12	4.11	4.11	4.1					
		Amps	8.37	8.36	8.34	8.4	9.62	9.61	9.59	9.7	11.01	11.00	10.98	11.1	12.52	12.51	12.49	12.6	14.20	14.19	14.17	14.3	16.18	16.17	16.15	16.2					
		Hi PR	267	268	270	274.7	309	310	312	316.9	353	355	356	361.1	401	402	404	408.7	452	454	455	460.1	507	508	510	514.9					
	Lo PR	123	125	128	133.0	131	132	135	140.5	137	139	142	147.1	143	144	147	152.7	148	150	153	158.2	155	157	160	165.0						
	MBh	40.8	41.4	42.6	44.4	40.4	41.0	42.2	44.0	39.4	39.9	41.1	43.0	37.6	38.1	39.3	41.2	35.4	35.9	37.1	39.0	33.3	33.9	35.1	36.9						
	S/T	0.77	0.70	0.57	0.4	0.78	0.71	0.57	0.4	1.00	0.73	0.60	0.5	1.00	0.75	0.62	0.5	1.00	0.77	0.64	0.5	1.00	1.00	0.69	0.5						
	ΔT	20.53	18.88	15.79	12.6	20.48	18.83	15.74	12.5	20.72	19.06	15.97	12.8	20.47	18.81	15.72	12.5	20.25	18.59	15.50	12.3	21.28	19.63	16.54	13.3						
	kW	2.34	2.34	2.33	2.4	2.63	2.63	2.62	2.6	2.95	2.95	2.94	3.0	3.30	3.29	3.29	3.3	3.68	3.68	3.68	3.7	4.14	4.13	4.13	4.2						
Amps	8.46	8.45	8.43	8.5	9.71	9.70	9.68	9.8	11.10	11.09	11.07	11.2	12.61	12.60	12.58	12.7	14.29	14.28	14.26	14.4	16.27	16.26	16.24	16.3							
Hi PR	270	271	273	277.7	312	313	315	319.9	356	358	360	364.2	404	405	407	411.8	455	457	458	463.1	510	511	513	517.9							
Lo PR	125	127	130	135.4	133	135	138	142.9	140	141	144	149.5	145	147	150	155.1	151	152	155	160.6	157	159	162	167.4							
1600	MBh	41.9	42.5	43.7	45.5	41.6	42.1	43.3	45.2	40.5	41.1	42.3	44.1	38.7	39.3	40.5	42.3	36.5	37.1	38.3	40.1	34.5	35.1	36.3	38.1						
	S/T	0.82	0.74	0.61	0.5	1.00	0.75	0.62	0.5	1.00	0.77	0.64	0.5	1.00	0.79	0.66	0.5	1.00	1.00	0.68	0.5	1.00	1.00	0.73	0.6						
	ΔT	19.16	17.51	14.42	11.2	19.12	17.46	14.37	11.2	19.35	17.69	14.60	11.4	19.10	17.44	14.35	11.2	18.88	17.22	14.13	10.9	19.91	18.26	15.17	12.0						
	kW	2.36	2.36	2.35	2.4	2.65	2.65	2.64	2.7	2.97	2.97	2.96	3.0	3.32	3.31	3.31	3.3	3.70	3.70	3.70	3.7	4.16	4.16	4.15	4.2						
	Amps	8.55	8.54	8.52	8.6	9.79	9.78	9.76	9.9	11.19	11.18	11.16	11.3	12.70	12.69	12.66	12.8	14.38	14.37	14.35	14.4	16.36	16.35	16.32	16.4						
Hi PR	274	275	277	281.5	316	317	319	323.7	360	361	363	367.9	408	409	411	415.6	459	460	462	466.9	514	515	517	521.7							
Lo PR	129	131	134	139.0	137	138	141	146.5	143	145	148	153.1	149	150	153	158.7	154	156	159	164.1	161	163	166	171.0							
IDB: Entering Indoor Dry Bulb Temperature																								Shaded area reflects ACCA (TVA) conditions				kW = Total system power			
																								Amos = outdoor unit amos (comp.+ fans)							

IDB		AIRFLOW		OUTDOOR AMBIENT TEMPERATURE																							
				65°F				75°F				85°F				95°F				105°F				115°F			
				59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
1100		MBh	40.3	40.9	42.1	43.9	39.9	40.5	41.7	43.6	38.9	39.5	40.7	42.5	37.1	37.7	38.9	40.7	34.9	35.4	36.7	38.5	32.9	33.4	34.6	36.5	
		S/T	1.00	0.74	0.61	0.5	1.00	0.74	0.61	0.5	1.00	0.77	0.64	0.5	1.00	0.79	0.66	0.5	1.00	1.00	1.00	0.68	0.5	1.00	1.00	0.73	0.6
		ΔT	25.58	23.92	20.83	17.6	25.53	23.88	20.79	17.6	25.76	24.11	21.02	17.8	25.51	23.86	20.77	17.6	25.29	23.64	20.55	17.3	26.33	24.67	21.59	18.4	
1320		kW	2.32	2.32	2.31	2.3	2.61	2.61	2.60	2.6	2.93	2.93	2.92	2.9	3.28	3.27	3.27	3.3	3.66	3.66	3.66	3.7	4.12	4.12	4.11	4.1	
		Amps	8.38	8.37	8.34	8.4	9.62	9.61	9.59	9.7	11.02	11.01	10.99	11.1	12.52	12.51	12.49	12.6	14.21	14.20	14.18	14.3	16.18	16.17	16.15	16.2	
		Hi PR	267	269	270	275.2	310	311	313	317.4	354	355	357	361.6	402	403	405	409.2	453	454	456	460.6	508	509	511	515.3	
1600		Lo PR	124	125	128	133.6	131	133	136	141.1	138	139	142	147.7	173	145	148	153.2	149	150	153	158.7	156	157	160	165.5	
		MBh	41.0	41.6	42.8	44.6	40.6	41.2	42.4	44.2	39.6	40.2	41.4	43.2	37.8	38.3	39.5	41.4	35.6	36.1	37.3	39.2	33.5	34.1	35.3	37.2	
		S/T	1.00	0.82	0.69	0.6	1.00	0.83	0.70	0.6	1.00	0.85	0.72	0.6	1.00	1.00	0.74	0.6	1.00	1.00	0.76	0.6	1.00	1.00	0.81	0.7	
80		ΔT	24.19	22.54	19.45	16.2	24.15	22.49	19.40	16.2	24.38	22.73	19.64	16.4	24.13	22.48	19.39	16.2	23.91	22.26	19.17	16.0	24.95	23.29	20.20	17.0	
		kW	2.34	2.34	2.34	2.4	2.63	2.63	2.62	2.6	2.95	2.95	2.94	3.0	3.30	3.29	3.29	3.3	3.68	3.68	3.68	3.7	4.14	4.14	4.13	4.2	
		Amps	8.46	8.46	8.43	8.5	9.71	9.70	9.68	9.8	11.11	11.10	11.07	11.2	12.61	12.60	12.58	12.7	14.30	14.29	14.27	14.4	16.27	16.26	16.24	16.3	
1600		Hi PR	271	272	274	278.2	313	314	316	320.4	357	358	360	364.7	405	406	408	412.3	456	457	459	463.6	511	512	514	518.4	
		Lo PR	126	128	131	136.0	134	135	138	143.5	140	142	145	150.1	146	147	150	155.6	151	153	156	161.1	158	160	163	167.9	
		MBh	42.1	42.7	43.9	45.8	41.8	42.4	43.6	45.4	40.7	41.3	42.5	44.3	38.9	39.5	40.7	42.5	36.7	37.3	38.5	40.3	34.7	35.3	36.5	38.3	
1600		S/T	1.00	0.87	0.73	0.6	1.00	0.87	0.74	0.6	1.00	0.90	0.76	0.6	1.00	1.00	0.78	0.6	1.00	1.00	0.80	0.7	1.00	1.00	0.85	0.7	
		ΔT	22.82	21.17	18.08	14.9	22.78	21.12	18.03	14.8	23.01	21.36	18.27	15.1</													

kW = Total system power
Amps = outdoor unit amps (comp. + fans)

Shaded area reflects AHRI (TVA) conditions

High & low pressures are measured at the liquid & suction access fittings.

IDB		AIRFLOW		OUTDOOR AMBIENT TEMPERATURE																							
				65°F				75°F				85°F				95°F				105°F				115°F			
				59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
1500		MBh	56.2	57.0	58.6	-	55.7	56.5	58.1	-	54.2	55.0	56.7	-	51.7	52.5	54.2	-	48.6	49.4	51.1	-	45.8	46.6	48.3	-	
		S/T	0.60	0.52	0.39	-	0.60	0.53	0.40	-	0.63	0.55	0.42	-	0.64	0.57	0.44	-	1.00	0.59	0.46	-	1.00	0.64	0.51	-	
1500		ΔT	18.19	16.48	13.28	-	18.15	16.43	13.23	-	18.39	16.67	13.47	-	18.13	16.41	13.21	-	17.90	16.18	12.98	-	18.97	17.26	14.06	-	
		kW	3.71	3.71	3.70	-	4.17	4.16	4.15	-	4.67	4.67	4.66	-	5.23	5.22	5.21	-	5.84	5.84	5.83	-	6.56	6.56	6.55	-	
1500		Amps	13.39	13.38	13.34	-	15.38	15.36	15.33	-	17.59	17.58	17.54	-	19.99	19.97	19.94	-	22.67	22.65	22.62	-	25.81	25.79	25.76	-	
		Hi PR	281	282	284	-	325	326	328	-	371	372	374	-	421	422	424	-	475	476	478	-	532	533	535	-	
1500		Lo PR	121	122	125	-	128	130	133	-	135	136	139	-	140	141	144	-	145	147	150	-	152	153	156	-	
		MBh	56.7	57.5	59.2	-	56.2	57.0	58.7	-	54.7	55.5	57.2	-	52.2	53.0	54.7	-	49.1	49.9	51.6	-	46.3	47.1	48.8	-	
1700		S/T	0.63	0.56	0.43	-	0.64	0.57	0.44	-	0.66	0.59	0.46	-	0.68	0.61	0.48	-	1.00	0.63	0.50	-	1.00	0.68	0.55	-	
		ΔT	17.50	15.79	12.59	-	17.46	15.74	12.54	-	17.70	15.98	12.78	-	17.44	15.73	12.52	-	17.21	15.50	12.30	-	18.28	16.57	13.37	-	
1700		kW	3.72	3.72	3.71	-	4.18	4.18	4.17	-	4.69	4.69	4.68	-	5.24	5.24	5.23	-	5.86	5.85	5.85	-	6.58	6.58	6.57	-	
		Amps	13.46	13.44	13.41	-	15.44	15.43	15.39	-	17.66	17.64	17.61	-	20.06	20.04	20.01	-	22.73	22.72	22.68	-	25.88	25.86	25.83	-	
1700		Hi PR	282	283	285	-	326	328	330	-	373	374	376	-	422	424	426	-	476	477	479	-	533	535	537	-	
		Lo PR	122	124	127	-	129	131	134	-	136	137	140	-	141	143	146	-	146	148	151	-	153	155	158	-	
1900		MBh	57.3	58.1	59.7	-	56.8	57.6	59.2	-	55.3	56.1	57.8	-	52.8	53.6	55.3	-	49.7	50.5	52.2	-	46.9	47.7	49.4	-	
		S/T	0.66	0.58	0.46	-	0.66	0.59	0.46	-	0.69	0.61	0.48	-	0.70	0.63	0.50	-	1.00	0.65	0.52	-	1.00	0.70	0.57	-	
1900		ΔT	16.89	15.18	11.98	-	16.85	15.13	11.93	-	17.09	15.37	12.17	-	16.83	15.11	11.91	-	16.60	14.89	11.68	-	17.67	15.96	12.76	-	
		kW	3.74	3.74	3.73	-	4.20	4.19	4.18	-	4.70	4.70	4.69	-	5.26	5.25	5.24	-	5.87	5.87	5.86	-	6.59	6.59	6.58	-	
1900		Amps</																									

IDB		AIRFLOW		OUTDOOR AMBIENT TEMPERATURE																							
				65°F				75°F				85°F				95°F				105°F				115°F			
				59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
				ENTERING INDOOR WET BULB TEMPERATURE																							
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71						
80	1500	MBh	56.5	57.3	59.0	61.5	56.0	56.8	58.5	61.0	54.5	55.3	57.0	59.5	52.0	52.8	54.5	57.0	48.9	49.7	51.4	54.0	46.1	46.9	48.6	51.2	
		S/T	0.84	0.76	0.64	0.5	1.00	0.77	0.64	0.5	1.00	0.79	0.67	0.5	1.00	0.81	0.68	0.5	1.00	1.00	0.71	0.6	1.00	1.00	0.75	0.6	
		ΔT	25.76	24.04	20.84	17.5	25.71	24.00	20.79	17.5	25.95	24.24	21.04	17.7	25.69	23.98	20.78	17.5	25.46	23.75	20.55	17.2	26.54	24.82	21.62	18.3	
		kW	3.71	3.70	3.70	3.7	4.16	4.16	4.15	4.2	4.67	4.67	4.66	4.7	5.23	5.22	5.21	5.2	5.84	5.84	5.83	5.9	6.56	6.56	6.55	6.6	
		Amps	13.39	13.37	13.34	13.5	15.37	15.36	15.32	15.5	17.59	17.57	17.54	17.7	19.99	19.97	19.94	20.1	22.66	22.65	22.61	22.8	25.80	25.79	25.76	25.9	
		Hi PR	281	283	285	289.4	326	327	329	333.6	372	373	375	379.8	422	423	425	429.6	475	477	478	483.4	533	534	536	540.7	
		Lo PR	121	123	126	131.0	129	130	133	138.3	135	137	140	144.7	140	142	145	150.2	146	147	150	155.5	152	154	157	162.1	
		MBh	57.0	57.8	59.5	62.0	56.5	57.3	59.0	61.5	55.1	55.8	57.5	60.1	52.5	53.3	55.0	57.6	49.5	50.3	51.9	54.5	46.7	47.5	49.1	51.7	
1700	S/T	1.00	0.80	0.67	0.5	1.00	0.81	0.68	0.5	1.00	0.83	0.70	0.6	1.00	0.85	0.72	0.6	1.00	1.00	0.74	0.6	1.00	1.00	0.79	0.7		
	ΔT	25.07	23.36	20.15	16.8	25.02	23.31	20.11	16.8	25.26	23.55	20.35	17.0	25.01	23.29	20.09	16.8	24.78	23.06	19.86	16.5	25.85	24.14	20.93	17.6		
	kW	3.72	3.72	3.71	3.7	4.18	4.18	4.17	4.2	4.69	4.69	4.68	4.7	5.24	5.24	5.23	5.3	5.86	5.85	5.85	5.9	6.58	6.58	6.57	6.6		
	Amps	13.46	13.44	13.41	13.6	15.44	15.43	15.39	15.5	17.66	17.64	17.61	17.8	20.05	20.04	20.00	20.2	22.73	22.72	22.68	22.8	25.87	25.86	25.82	26.0		
	Hi PR	283	284	286	291.0	327	328	330	335.2	373	375	377	381.4	423	424	426	431.3	477	478	480	485.0	534	535	537	542.3		
	Lo PR	123	124	127	132.3	130	131	134	139.6	136	138	141	146.0	142	143	146	151.4	147	149	152	156.7	154	155	158	163.4		
	MBh	57.6	58.4	60.1	62.6	57.1	57.9	59.6	62.1	55.6	56.4	58.1	60.7	53.1	53.9	55.6	58.1	50.1	50.8	52.5	55.1	47.2	48.0	49.7	52.3		
	S/T	1.00	0.83	0.70	0.6	1.00	0.83	0.70	0.6	1.00	0.85	0.73	0.6	1.00	0.87	0.74	0.6	1.00	1.00	0.77	0.6	1.00	1.00	0.81			

kW = Total system power
Amps = outdoor unit amps (comp. + fans)

Shaded area reflects AHRI (TVA) conditions

DB: Entering Indoor Dry Bulb Temperature
High & low pressures are measured at the liquid & suction access fittings.

EXPANDED HEATING DATA

DP3HM2431

100 % CAPACITY

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	28.62	26.77	24.94	23.15	22.00	21.15	18.99	17.00	15.38	14.17	13.28	12.80	12.19	10.65	9.12	7.59	6.05
T/R	31.85	30.08	28.30	26.53	25.46	24.48	21.98	19.68	17.80	16.40	15.37	14.81	14.10	12.33	10.55	8.78	7.01
KW	1.93	1.90	1.86	1.83	1.81	1.80	1.77	1.73	1.70	1.67	1.64	1.62	1.60	1.57	1.54	1.51	1.47
AMPS	7.1	7.0	6.8	6.7	6.6	6.5	6.4	6.3	6.1	6.0	5.8	5.8	5.7	5.6	5.4	5.3	5.1
COP	4.35	4.14	3.92	3.71	3.56	3.45	3.15	2.87	2.65	2.49	2.38	2.32	2.23	1.99	1.74	1.48	1.20
Hi PR	369	357	345	333	325	321	309	297	285	273	261	253	249	237	225	213	201
LO PR	135	126	118	109	104	101	93	84	76	68	59	54	51	42	34	26	17

DP3HM3031

100 % CAPACITY

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	33.40	31.33	29.29	27.29	26.00	25.07	22.69	20.46	18.64	17.30	16.33	15.80	15.12	13.42	11.72	10.02	8.32
T/R	29.02	27.48	25.95	24.41	23.49	22.65	20.50	18.49	16.84	15.63	14.75	14.27	13.66	12.12	10.59	9.05	7.51
KW	2.16	2.15	2.13	2.12	2.12	2.11	2.10	2.09	2.08	2.07	2.06	2.05	2.04	2.03	2.02	2.01	2.00
AMPS	7.8	7.7	7.7	7.6	7.6	7.6	7.5	7.5	7.4	7.4	7.3	7.3	7.3	7.2	7.2	7.1	7.1
COP	4.54	4.28	4.02	3.77	3.60	3.48	3.17	2.87	2.63	2.45	2.33	2.26	2.17	1.93	1.70	1.46	1.22
Hi PR	361	349	337	326	319	314	302	290	279	267	255	248	243	232	220	208	197
LO PR	137	129	120	112	107	103	95	86	78	69	60	55	52	43	35	26	18

DP3HM363*

100 % CAPACITY

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	41.71	38.85	36.00	33.19	31.40	30.02	26.57	23.46	20.92	19.01	17.57	16.80	15.83	13.39	10.96	8.53	6.09
T/R	32.34	30.38	28.42	26.46	25.28	24.17	21.39	18.89	16.84	15.31	14.15	13.53	12.74	10.78	8.82	6.86	4.91
KW	2.66	2.61	2.57	2.53	2.50	2.48	2.44	2.40	2.35	2.31	2.26	2.24	2.22	2.18	2.13	2.09	2.05
AMPS	9.7	9.5	9.4	9.2	9.0	9.0	8.8	8.6	8.4	8.2	8.0	7.9	7.8	7.6	7.4	7.3	7.1
COP	4.60	4.36	4.10	3.85	3.68	3.54	3.19	2.87	2.61	2.41	2.27	2.20	2.09	1.80	1.51	1.20	0.87
Hi PR	371	359	347	335	328	323	311	299	287	275	263	255	251	239	226	214	202
LO PR	132	124	116	108	103	99	91	83	75	66	58	53	50	42	33	25	17

Calculations are based on nominal CFM and 70 °F indoor dry bulb.

Amps = Outdoor unit amps (comp.+fan)

Note: Shaded area is AHRI Rating Conditions at 47°F outdoor ambient temperature

kW = Total system power

DP3HM4231

100 % CAPACITY

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	47.47	44.54	41.66	38.82	37.00	35.68	32.33	29.19	26.61	24.72	23.34	22.60	21.64	19.24	16.84	14.44	12.04
T/R	33.81	32.03	30.25	28.48	27.41	26.44	23.95	21.62	19.71	18.31	17.29	16.74	16.03	14.25	12.47	10.70	8.92
KW	3.14	3.10	3.06	3.02	3.00	2.98	2.94	2.90	2.86	2.82	2.78	2.76	2.74	2.70	2.67	2.63	2.59
AMPS	11.7	11.5	11.3	11.1	11.0	11.0	10.8	10.6	10.5	10.3	10.1	10.0	9.9	9.8	9.6	9.4	9.3
COP	4.43	4.21	3.99	3.77	3.62	3.51	3.22	2.95	2.73	2.57	2.46	2.40	2.31	2.08	1.85	1.61	1.36
Hi PR	376	364	351	339	332	327	315	302	290	278	266	258	254	241	229	217	205
LO PR	132	123	115	107	102	99	91	82	74	66	58	53	50	42	33	25	17

DP3HM483*

100 % CAPACITY

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	59.99	55.93	51.93	48.01	45.50	43.59	38.82	34.46	30.91	28.26	26.27	25.20	23.85	20.46	17.08	13.70	10.31
T/R	33.38	31.42	29.47	27.51	26.33	25.23	22.46	19.94	17.89	16.35	15.20	14.58	13.80	11.84	9.88	7.93	5.97
KW	4.28	4.18	4.08	3.98	3.92	3.88	3.78	3.68	3.58	3.49	3.39	3.33	3.29	3.19	3.09	2.99	2.89
AMPS	16.1	15.6	15.2	14.8	14.5	14.3	13.9	13.5	13.0	12.6	12.2	11.9	11.8	11.3	10.9	10.5	10.0
COP	4.11	3.92	3.73	3.53	3.40	3.29	3.01	2.74	2.53	2.38	2.27	2.22	2.13	1.88	1.62	1.34	1.05
Hi PR	412	399	386	372	364	359	345	332	318	305	292	284	278	265	251	238	225
LO PR	131	123	115	107	102	99	91	82	74	66	58	53	50	41	33	25	17

DP3HM603*

100 % CAPACITY

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	68.76	64.64	60.57	56.58	54.00	52.13	47.48	43.05	39.41	36.75	34.83	33.80	32.45	29.09	25.72	22.35	18.99
T/R	34.99	33.21	31.42	29.64	28.57	27.62	25.12	22.78	20.85	19.45	18.43	17.88	17.17	15.39	13.61	11.83	10.04
KW	4.74	4.68	4.62	4.56	4.52	4.50	4.44	4.38	4.32	4.26	4.20	4.16	4.14	4.08	4.02	3.96	3.90
AMPS	17.8	17.6	17.3	17.0	16.9	16.8	16.5	16.3	16.0	15.7	15.5	15.3	15.2	15.0	14.7	14.4	14.2
COP	4.25	4.05	3.84	3.64	3.50	3.40	3.14	2.88	2.67	2.53	2.43	2.38	2.30	2.09	1.88	1.66	1.43
Hi PR	403	390	377	364	356	351	338	324	311	298	285	277	272	259	246	233	220
LO PR	124	116	109	101	96	93	85	78	70	62	55	50	47	39	31	24	16

DP3HM603*

70 % CAPACITY

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	51.36	47.88	44.46	41.10	38.96	37.32	33.23	29.51	26.47	24.20	22.49	21.58	20.42	17.52	14.63	11.73	8.84
T/R	34.64	32.61	30.58	28.55	27.33	26.18	23.31	20.70	18.57	16.97	15.78	15.14	14.32	12.29	10.26	8.23	6.20
KW	2.90	2.82	2.74	2.66	2.61	2.58	2.50	2.42	2.34	2.26	2.17	2.13	2.09	2.01	1.93	1.85	1.77
AMPS	10.5	10.2	9.8	9.5	9.3	9.1	8.8	8.4	8.1	7.7	7.4	7.1	7.0	6.7	6.3	5.9	5.6
COP	5.18	4.97	4.75	4.53	4.37	4.24	3.90	3.58	3.32	3.14	3.03	2.98	2.86	2.55	2.22	1.86	1.46
Hi PR	391	378	365	353	345	340	327	314	302	289	276	269	264	251	238	225	213
LO PR	122	114	107	99	95	92	84	76	69	61	54	49	46	38	31	23	16

Calculations are based on nominal CFM and 70 °F indoor dry bulb.

Amps = Outdoor unit amps (comp.+fan)

Note: Shaded area is AHRI Rating Conditions at 47°F outdoor ambient temperature

kW = Total system power

DP3HM2431

SETUP	MOTOR TAP	VOLTS	STATIC								
				0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8
HORIZONTAL POSITION	T1	230	CFM	847	792	728	638	-	-	-	-
			Watts	76	84	94	102	-	-	-	-
	T2/T3	230	CFM	1043	1020	922	906	856	713	623	635
			Watts	166	168	179	185	194	203	209	206
	T4/T5	230	CFM	1371	1316	1281	1240	1186	1133	1072	1000
			Watts	235	243	252	261	266	275	284	293
DOWNSHOT POSITION	T1	230	CFM	828	767	680	574	-	-	-	-
			Watts	75	85	95	104	-	-	-	-
	T2/T3	230	CFM	1086	993	963	852	768	672	637	621
			Watts	157	169	176	187	194	205	215	228
	T4/T5	230	CFM	1355	1300	1254	1201	1147	1084	1007	899
			Watts	244	253	260	268	276	285	294	303

DP3HM363*

SETUP	MOTOR TAP	VOLTS									
				0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8
HORIZONTAL POSITION	T1	230	CFM	850	795	726	640	559	-	-	-
			Watts	76	85	93	103	110	-	-	-
	T2/T3	230	CFM	1399	1360	1288	1240	1190	1136	1083	1017
			Watts	281	291	298	305	313	322	329	336
	T4/T5	230	CFM	1604	1560	1507	1468	1415	1364	1321	1276
			Watts	396	402	408	424	426	433	444	454
DOWNSHOT POSITION	T1	230	CFM	825	762	686	577	523	-	-	-
			Watts	77	87	97	105	111	-	-	-
	T2/T3	230	CFM	1321	1319	1222	1170	1119	1077	1005	930
			Watts	285	291	300	309	319	324	333	342
	T4/T5	230	CFM	1595	1555	1506	1462	1415	1370	1319	1260
			Watts	382	391	399	408	418	426	435	444

DP3HM483*

SETUP	MOTOR TAP	VOLTS									
				0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8
HORIZONTAL POSITION	T1	230	CFM	1177	1123	1077	1031	972	-	-	-
			Watts	142	151	162	173	185	-	-	-
	T2/T3	230	CFM	1838	1794	1749	1711	1672	1626	1576	1528
			Watts	448	458	468	479	490	497	503	510
	T4/T5	230	CFM	1984	1947	1975	1864	1823	1781	1741	1694
			Watts	567	578	590	596	603	610	618	623
DOWNSHOT POSITION	T1	230	CFM	1168	1101	1045	979	913	-	-	-
			Watts	144	155	168	182	197	-	-	-
	T2/T3	230	CFM	1841	1786	1735	1691	1646	1598	1544	1489
			Watts	438	451	463	473	485	493	500	508
	T4/T5	230	CFM	2004	1949	1892	1837	1782	1728	1674	1616
			Watts	564	577	587	594	603	612	620	628

DP3HM3031

SETUP	MOTOR TAP	VOLTS									
				0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8
HORIZONTAL POSITION	T1	230	CFM	877	821	758	974	596	531	481	-
			Watts	84	92	99	110	118	125	130	-
	T2/T3	230	CFM	1276	1223	1175	1128	1077	1025	985	914
			Watts	221	232	241	250	257	264	271	279
	T4/T5	230	CFM	1463	1419	1376	1329	1282	1235	1183	1126
			Watts	284	294	302	309	317	325	333	340
DOWNSHOT POSITION	T1	230	CFM	859	797	719	619	552	497	437	-
			Watts	83	92	101	111	118	122	127	-
	T2/T3	230	CFM	1303	1236	1178	1123	1075	1015	956	884
			Watts	225	236	247	254	262	271	279	287
	T4/T5	230	CFM	1439	1396	1341	1294	1246	1185	1119	1047
			Watts	288	297	305	313	322	330	339	347

DP3HM4231

SETUP	MOTOR TAP	VOLTS									
				0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8
HORIZONTAL POSITION	T1	230	CFM	1003	937	887	837	773	699	634	574
			Watts	100	106	116	129	142	154	162	171
	T2/T3	230	CFM	1487	1447	1407	1363	1318	1274	1229	1165
			Watts	269	279	291	302	309	321	332	340
	T4/T5	230	CFM	1799	1754	1712	1672	1630	1582	1534	1482
			Watts	419	430	442	453	462	469	475	481
DOWNSHOT POSITION	T1	230	CFM	981	918	850	761	687	613	553	488
			Watts	100	113	126	138	153	161	171	179
	T2/T3	230	CFM	1458	1418	1379	1336	1291	1249	1204	1141
			Watts	266	277	288	299	307	318	330	337
	T4/T5	230	CFM	1786	1728	1678	1629	1577	1517	1453	1385
			Watts	419	432	445	457	468	474	482	490

DP3HM603*

SETUP	MOTOR TAP	VOLTS									
				0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8
HORIZONTAL POSITION	T1	230	CFM	1499	1447	1404	1376	1330	1280	1230	1145
			Watts	268	278	290	300	311	325	338	353
	T2/T3	230	CFM	2001	1958	1908	1865	1822	1774	1729	1680
			Watts	569	583	595	600	613	622	629	638
	T4/T5	230	CFM	2199	2161	2126	2090	2056	2018	1982	1949
			Watts	801	809	817	828	838	851	858	873
DOWNSHOT POSITION	T1	230	CFM	1464	1408	1364	1326	1285	1240	1201	1140
			Watts	247	264	281	292	305	317	334	351
	T2/T3	230	CFM	1999	1957	1904	1862	1822	1769	1732	1688
			Watts	546	563	577	587	598	606	615	625
	T4/T5	230	CFM	2067	2031	1999	1964	1932	1897	1863	1832
			Watts	821	829	838	849	859	872	880	895

NOTES:


1. Data shown is dry coil. Wet coil pressure drop is approximately 0.2" H₂O, for three-row indoor coil; and 0.3" H₂O, for four-row indoor coil.
2. Data shown does not include filter pressure drop, approx. 0.08" H₂O.
3. Reduce airflow by 2% for 208V operation.
4. ALL MODELS SHOULD RUN NO LESS THAN 300 CFM/TON.
5. For high static applications, see blower performance table for selecting appropriate speed tap.

MODEL AND HEAT KIT USAGE	CIRCUIT #1		CIRCUIT #2		SINGLE-POINT KIT		ACTUAL kW
	MCA ¹	MOP ²	MCA ¹	MOP ²	MCA ¹	MOP ²	
DP3HM2431							
HKTPD051	24.7	25	-	-	43.18	45	4.75
HKTPD081	36.5	40	-	-	54.98	60	7
HKTPD101	49.5	50	-	-	67.98	70	9.5
DP3HM3031							
HKTPD051	24.7	25	-	-	45.9	50	4.75
HKTPD081	36.5	40	-	-	57.7	60	7
HKTPD101	49.5	50	-	-	70.7	80	9.5
HKTPD151	49.5	50	24.7	25	95.4	100	14.25
DP3HM3631							
HKTPD051	24.7	25	-	-	50.46	60	4.75
HKTPD081	36.5	40	-	-	62.26	70	7
HKTPD101	49.5	50	-	-	75.26	80	9.5
HKTPD151	49.5	50	24.7	25	99.96	100	14.25
DP3HM4231							
HKTPD051	24.7	25	-	-	52.22	60	4.75
HKTPD081	36.5	40	-	-	64.02	70	7
HKTPD101	49.5	50	-	-	77.02	80	9.5
HKTPD151	49.5	50	24.7	25	101.72	110	14.25
DP3HM4831							
HKTPD051	24.7	25	-	-	56.34	70	4.75
HKTPD081	36.5	40	-	-	68.14	80	7
HKTPD101	49.5	50	-	-	81.14	90	9.5
HKTPD151	49.5	50	24.7	25	105.84	110	14.25
HKTPD191	49.5	50	49.5	50	130.64	150	19
DP3HM6031							
HKTPD051	24.7	25	-	-	67.54	80	4.75
HKTPD081	36.5	40	-	-	79.34	90	7
HKTPD101	49.5	50	-	-	92.34	100	9.5
HKTPD151	49.5	50	24.7	25	117.04	125	14.25
HKTPD201	49.5	50	49.5	50	141.84	150	19


¹ Minimum Circuit Ampacity² Maximum Overcurrent Protection Device

Heating kW Correction Factor					
Supply Voltage	240	230	220	210	208
Correction Factor	1.0	0.93	0.85	0.78	0.76


Multiply rated kW by correction factor to get actual kW

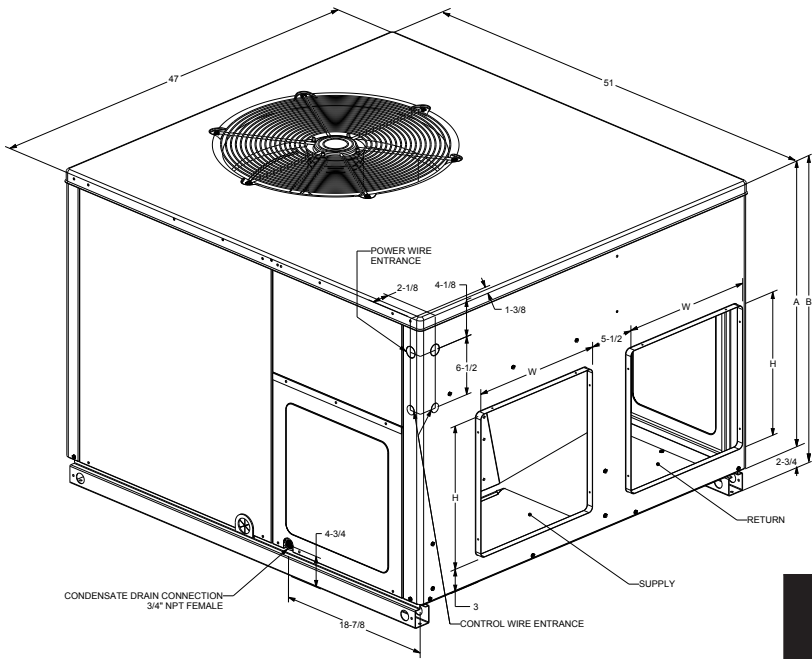

MODEL	UNIT DIMENSIONS (INCHES)				CHASSIS SIZE
			HEIGHT		
	W	D	A	B	
DP3HM2431	47	51	32	34¾	Medium
DP3HM3031	47	51	32	34¾	Medium
DP3HM363*	47	51	32	34¾	Medium
DP3HM4231	47	51	40	42¾	Large
DP3HM483*	47	51	40	42¾	Large
DP3HM603*	47	51	40	42¾	Large

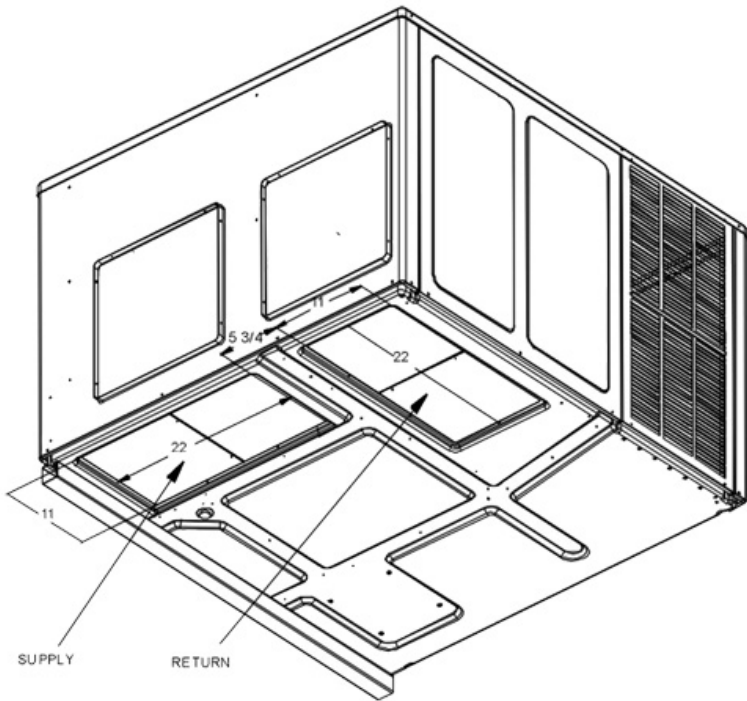

MODEL	DUCT OPENINGS			
	SUPPLY		RETURN	
	W	H	W	H
DP3HM2431	16	16	16	16
DP3HM3031	16	16	16	16
DP3HM363*	16	16	16	16
DP3HM4231	16	18	16	18
DP3HM483*	16	18	16	18
DP3HM603*	16	18	16	18

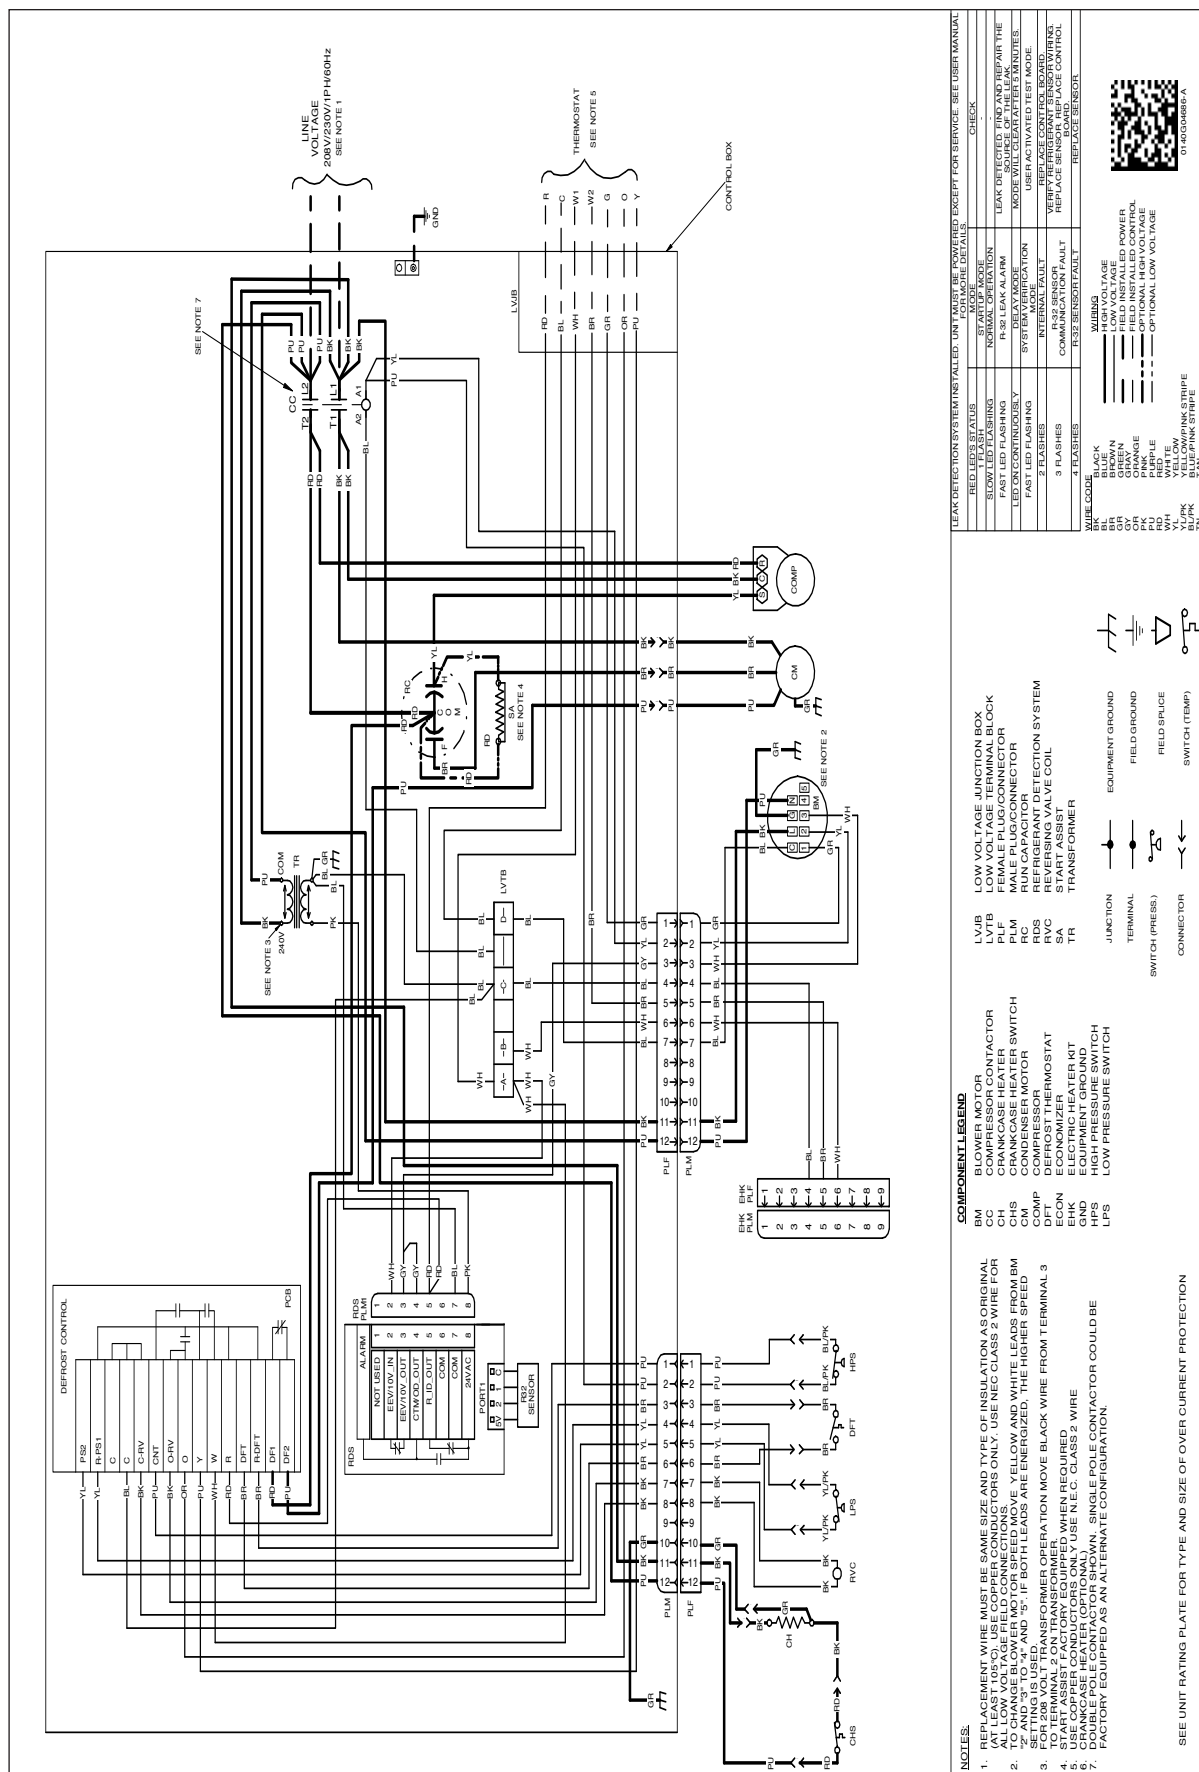


Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

⚠ WARNING

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.




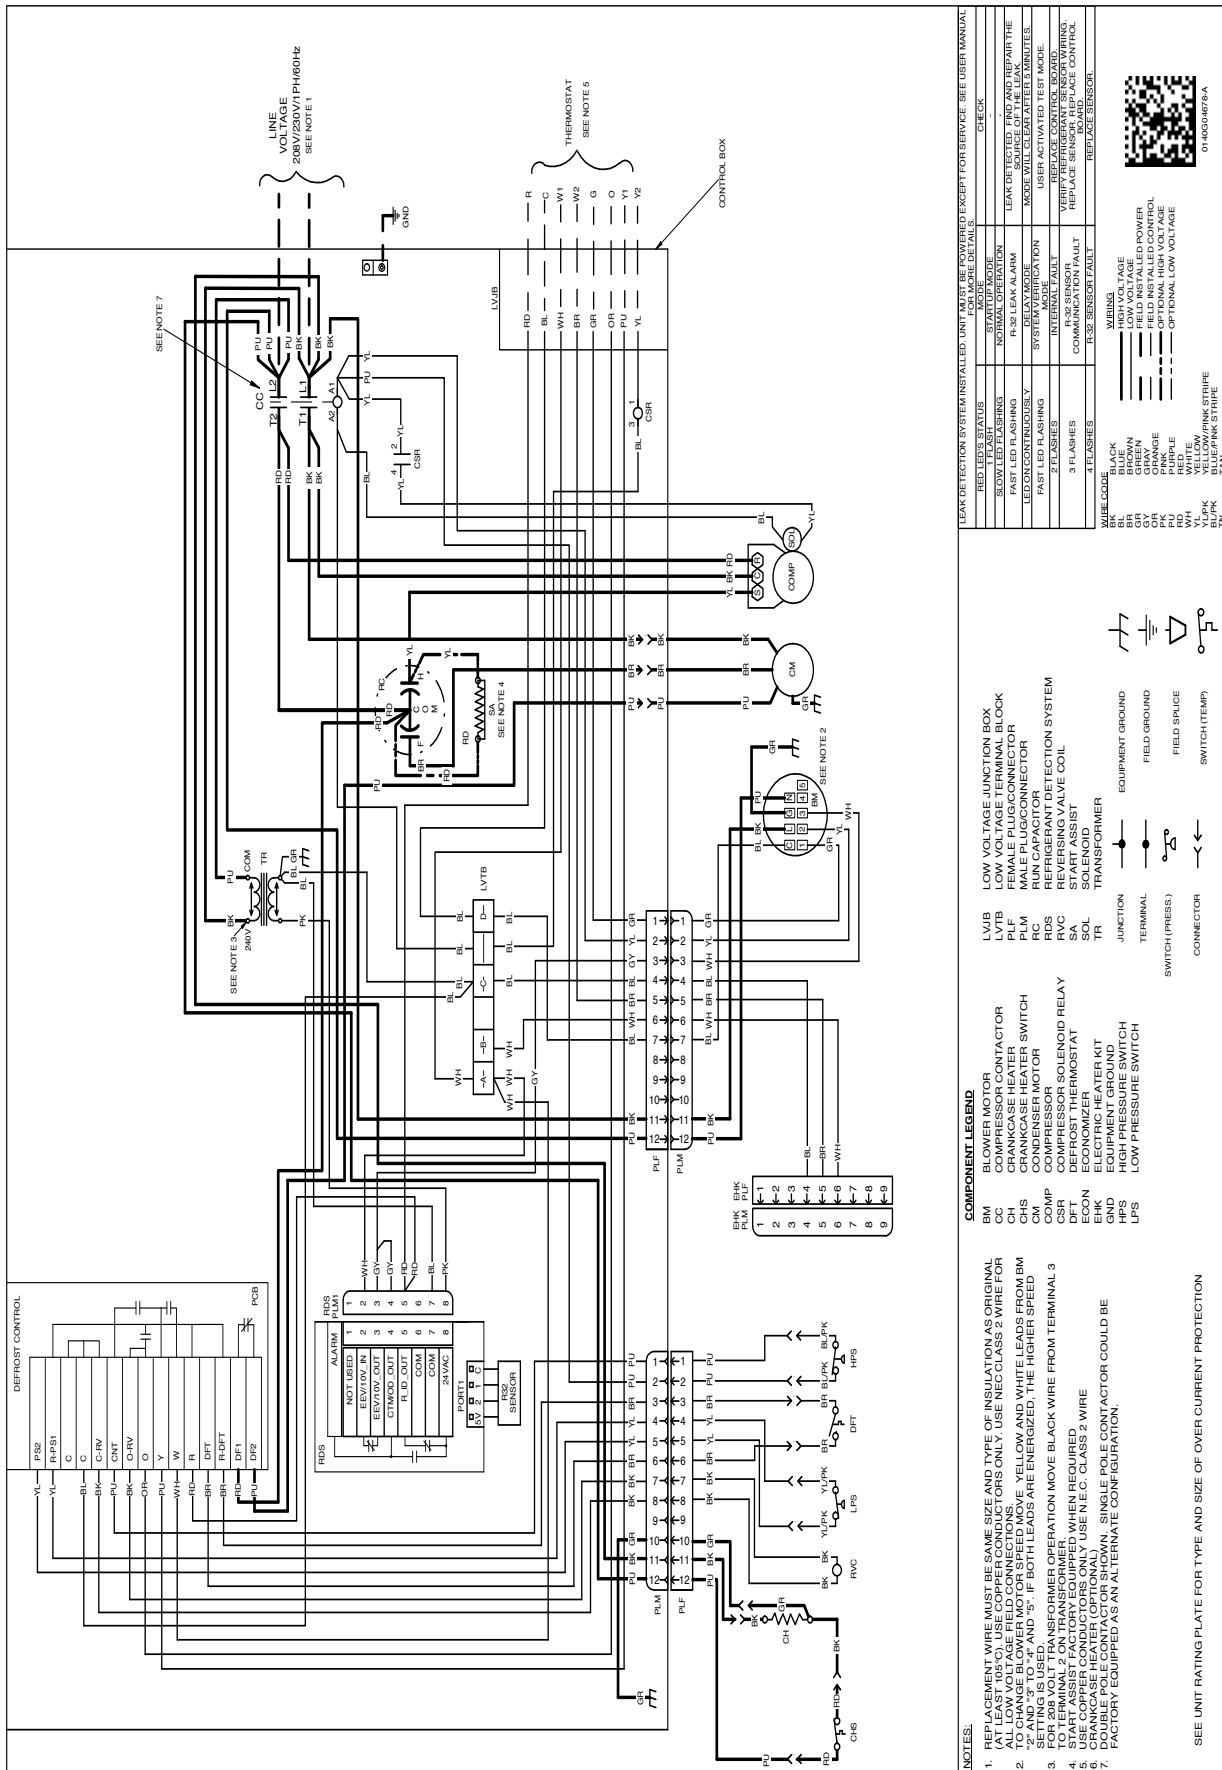


Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

⚠ WARNING

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

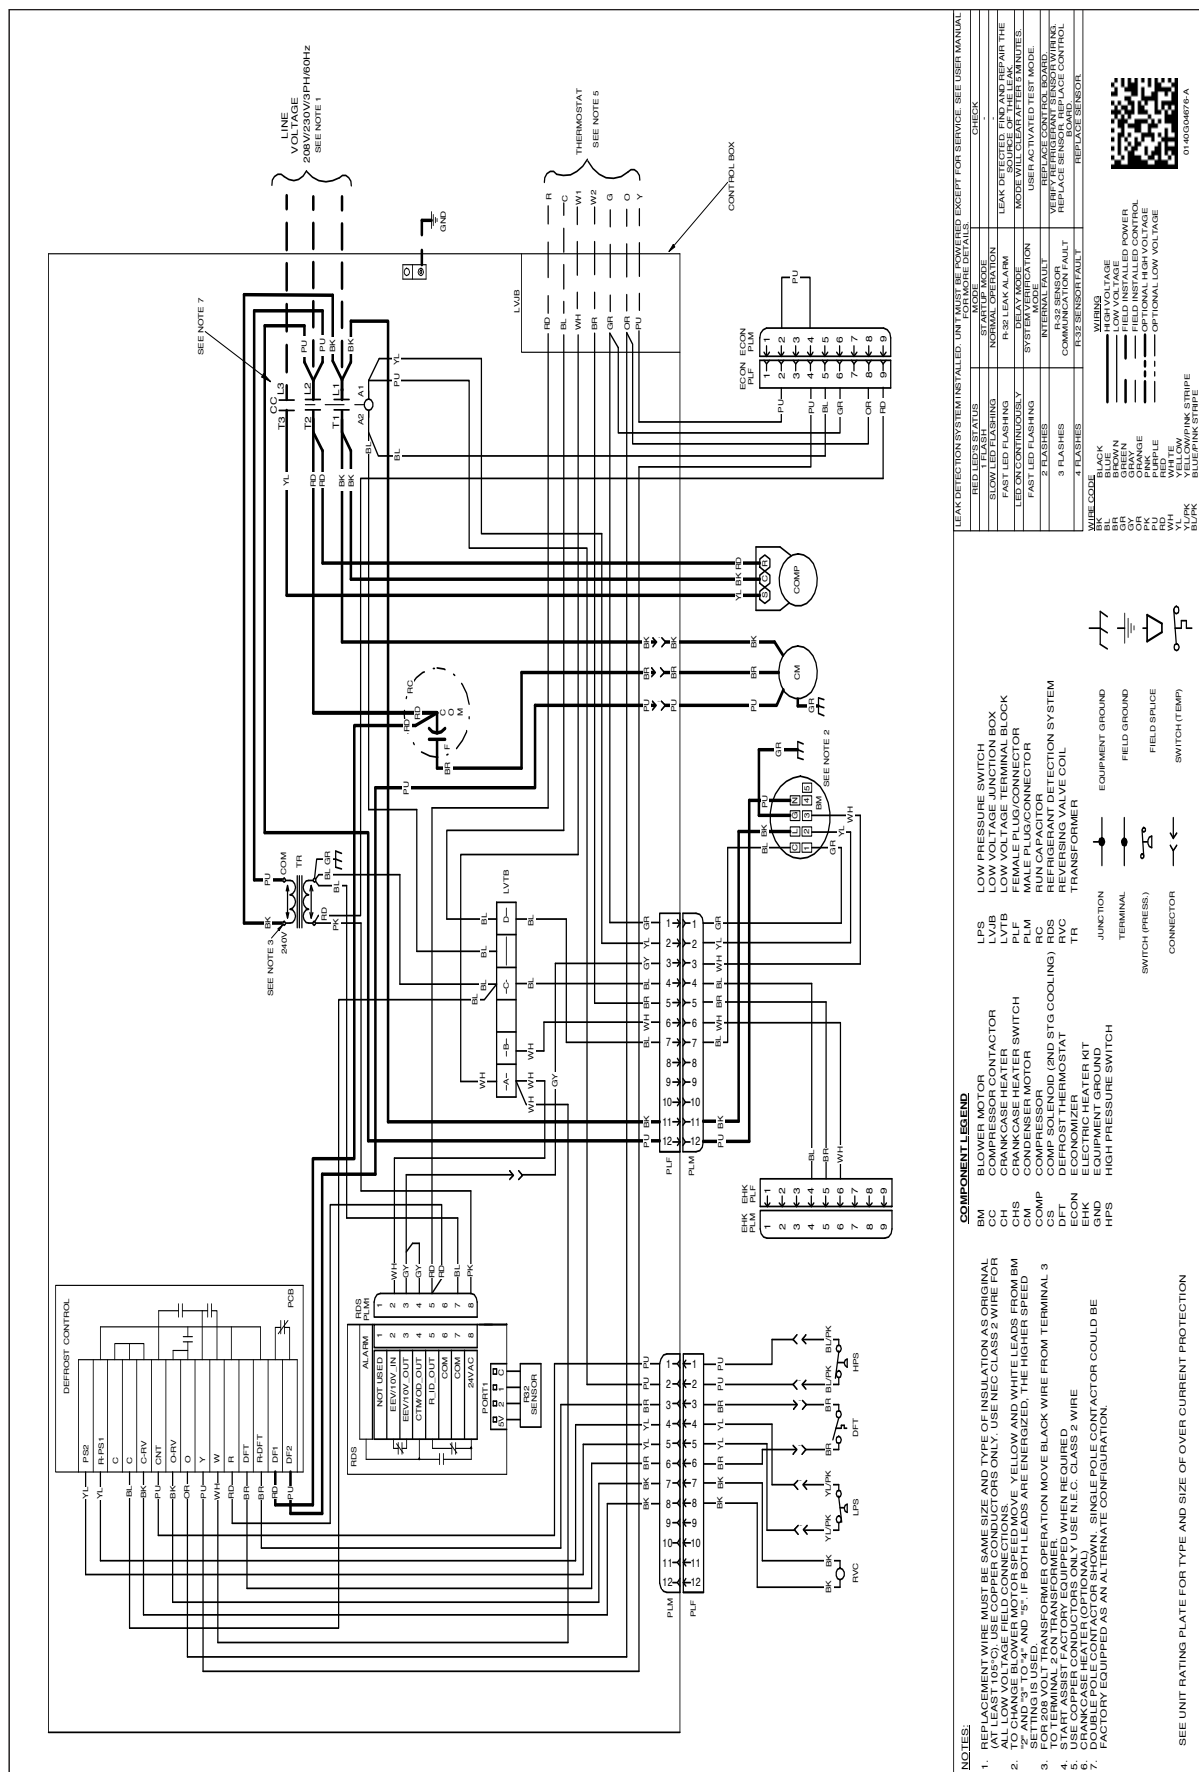

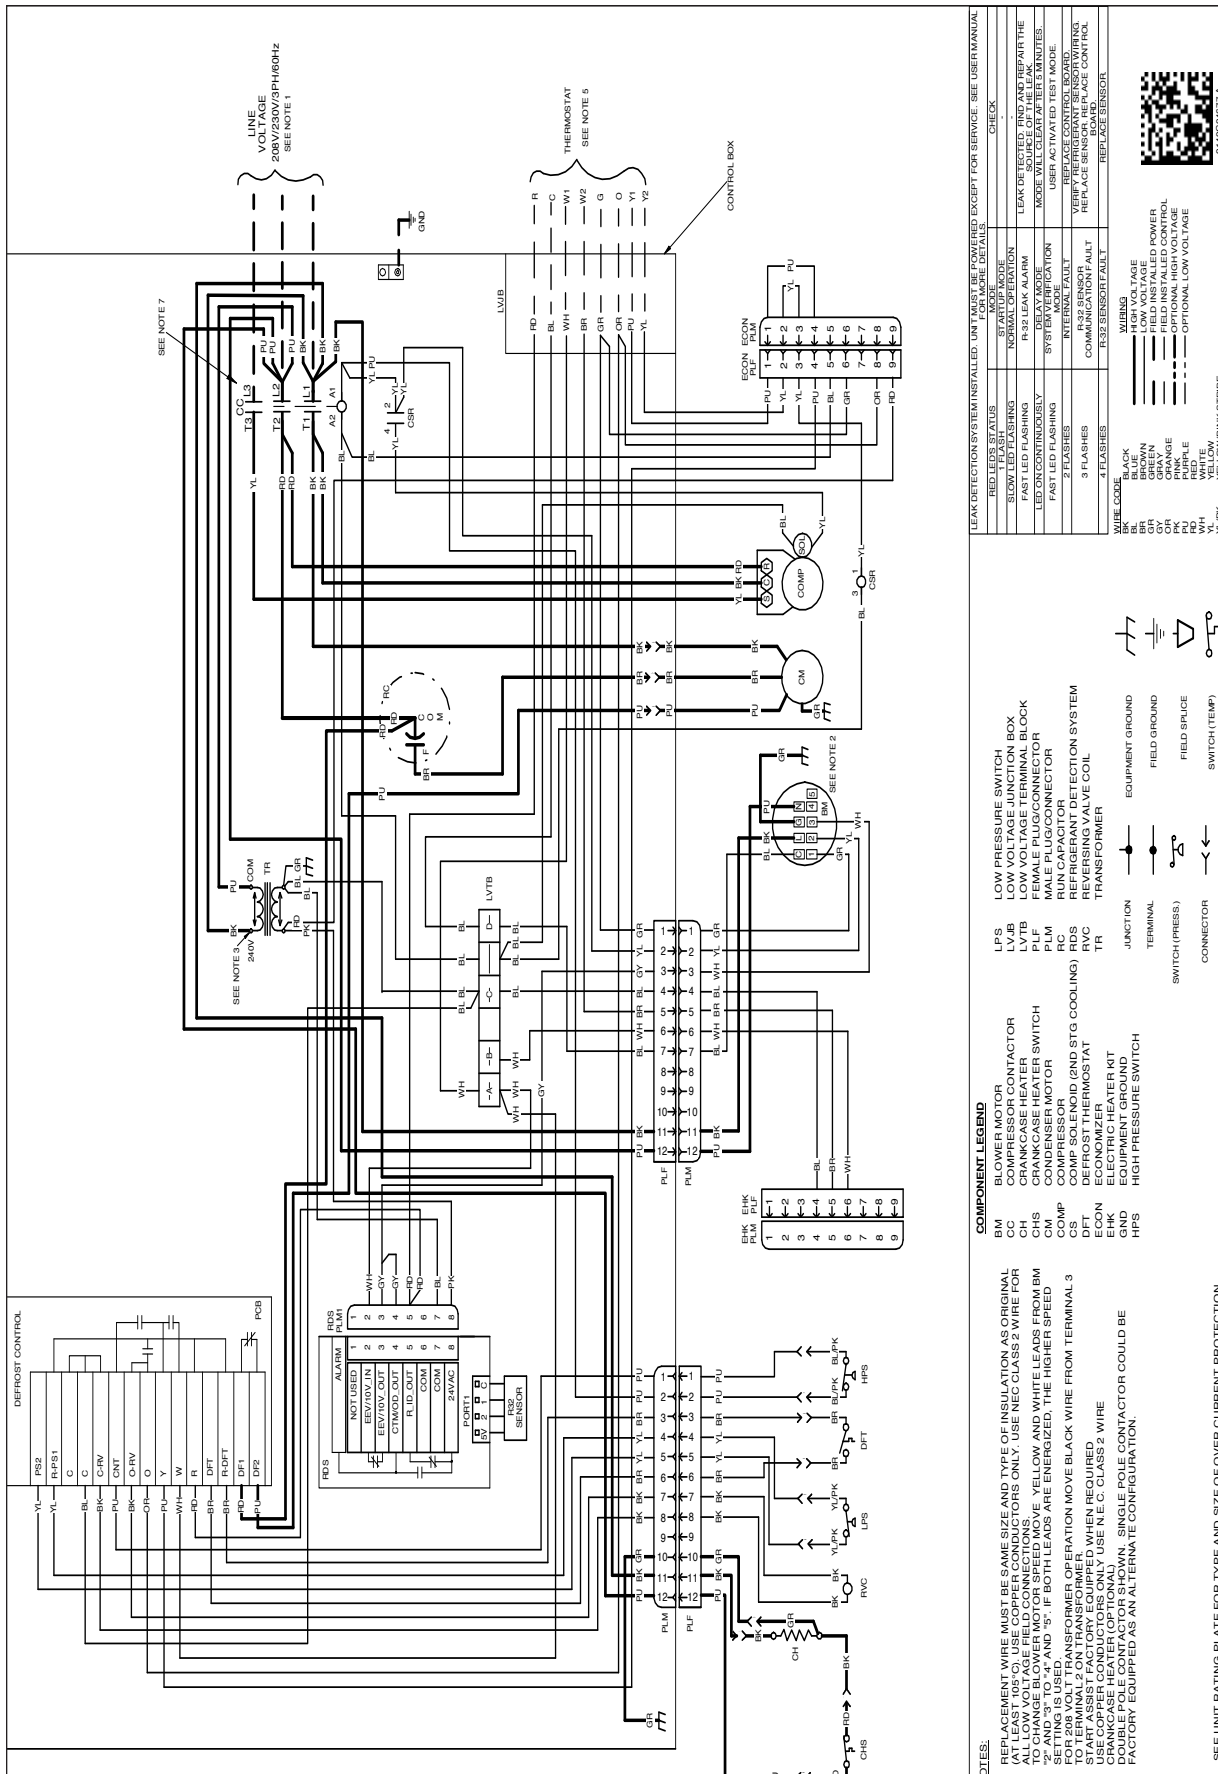

Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

⚠ WARNING

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

ACCESSORY DESCRIPTION	ITEM NUMBER	
	MEDIUM CHASSIS	LARGE CHASSIS
Concentric Kit	CDK36	CDK4872
Downflow Economizer**	DDNECNJPCHMM	DDNECNJPCHML
Downflow Internal Filter Rack	DDNIFRPCHMM	DDNIFRPCHML
Downflow Manual Damper	PGMDD101/102	PGMDD103
Downflow Motorized Damper	PGMDMD101/102	PGMDMD103
Downflow Square to Round	SQRPG101/102	SQRPG103
Horizontal Duct Cover*	20464501NGK	20464502NGK
Downflow Conversion Kit**	DWNFLWCONV	DWNFLWCONV
Economizer Wiring Harness***	0259L00411	0259L00411
External Horizontal Filter Rack	DPHFRA	DPHFRA
Horizontal Economizer	DHZEENJPGCHM	DHZEENJPGCHL
Horizontal Manual Damper	PGMDH102	PGMDH103
Horizontal Motorized Damper	PGMDMH102	PGMDMH103
Horizontal Square to Round	SQRPGH102	SQRPGH103
Outdoor Thermostat Kit w/ Lockout Stat	OT18-60A	OT18-60A
Outdoor Thermostat Kit (Only for GPHM5(24,30)31	OTHPPKG-01	-
Roof Curb	D14CRBPGCHMA	D14CRBPGCHMA

* Required for all downflow installations.

** Either a "Downflow Economizer" or a "Downflow Conversion Kit" is mandatory for all downflow installations.

*** Required for installation of Economizers.