



DR80SN / DD80SN



SINGLE-STAGE, 9-SPEED

ECM GAS FURNACES

80% AFUE

HEATING INPUT: 40,000 – 120,000 BTU/H

■ Contents

Nomenclature.....	2
Product Specifications.....	3
Dimensions	5
Airflow Data	7
Wiring Diagram.....	13
Accessories	14
Minimum Filter Sizes	14

R32

■ Standard Features

- Heavy-duty stainless-steel, dual-diameter tubular heat exchanger
- Single-stage gas valve
- Durable Hot-surface igniter
- Quiet, single-speed draft inducer
- Self-diagnostic control board with constant memory fault history output to a 3-digit 7 segment LED display and push buttons
- Color-coded low-voltage terminals
- Energy-efficient multi-speed (9-speed tap) ECM blower motor
- Multiple continuous fan speed options offer quiet air circulation
- AHRI Certified; ETL Listed
- All models comply with CA Low NOx standards
- Can not be installed in California's South Coast Air Quality Management District (SCAQMD) and San Joaquin Valley Air Pollution Control District (SJVAPCD).

■ Cabinet Features

- Multi-position installation:
DR80SN: upflow, horizontal left or right
DD80SN: downflow, horizontal left or right
- Convenient left or right connection for gas and electrical service
- Cabinet air leakage (Q_{Leak}) $\leq 2\%$
- Heavy-gauge steel cabinet with durable baked-enamel finish
- Foil faced insulated heat exchanger



* Complete warranty details available from your local dealer or at www.daikincomfort.com. To receive the Lifetime Heat Exchanger Limited Warranty (good for as long as you own your home), the 6-Year Unit Replacement Limited Warranty and the 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Additional requirements for annual maintenance are required for the Unit Replacement Limited Warranty. Online registration and some of the additional requirements are not required in California or Québec. The duration of warranty coverages in Texas differs in some cases.

	D	R	80	S	N	060	3	B	N	A	A	
	1	2	3,4	5	6	7,8,9	10	11	12	13	14	
BRAND											MINOR REVISION	
D - DAIKIN BRAND											A - INITIAL RELEASE	
											B - 1ST REVISION	
CONFIGURATION											MAJOR REVISION	
R - UPFLOW/HORIZONTAL											A - INITIAL RELEASE	
D - DOWNFLOW/HORIZONTAL											B - 1ST REVISION	
AFUE											NOx	
80 - 80% AFUE											X - Low NOx (≤ 40 ng/J NOx)	
GAS VALVE											CABINET WIDTH	
S - SINGLE STAGE											A - 14	
											B - 17½"	
											C - 21"	
											D - 24½"	
MOTOR											MAXIMUM CFM	
N - MULTI-SPEED ECM (9 TAPS)											3 - 1200 CFM	
MBTU/H											4 - 1600 CFM	
040 - 40,000 BTU/H											5 - 2000 CFM	
060 - 60,000 BTU/H												
080 - 80,000 BTU/H												

	DR80SN 0403A*A	DR80SN 0603A*A	DR80SN 0604B*A	DR80SN 0803B*A	DR80SN 0804B*A	DR80SN 0805C*A	DR80SN 1005C*A	DR80SN 1205D*A
HEATING CAPACITY								
Input ¹	40,000	60,000	60,000	80,000	80,000	80,000	100,000	120,000
Natural Gas Output ¹	32,000	48,000	48,000	64,000	64,000	64,000	80,000	96,000
LP Gas Output ¹	32,000	48,000	48,000	64,000	64,000	64,000	80,000	96,000
AFUE ²	80	80	80	80	80	80	80	80
Available AC @ 0.5" ESP	3	3	4	4	4	5	5	5
Temperature Rise Range (°F)	25 - 55	20 - 50	20 - 50	35 - 65	35 - 65	35 - 65	35 - 65	40 - 70
CIRCULATOR BLOWER								
Size (D x W)	10" x 6"	10" x 6"	10" x 8"	10" x 8"	10" x 8"	10" x 10"	10" x 10"	11" x 10"
Horsepower @1075 RPM	½	½	¾	½	¾	¾	¾	1
No. of Speeds	9	9	9	9	9	9	9	9
Vent Diameter ³	4"	4"	4"	4"	4"	4"	4"	4"
No. of Burners	2	3	3	4	4	4	5	6
ELECTRICAL DATA								
Min. Circuit Ampacity ⁴	7.7	7.7	11.3	7.7	11.3	11.3	11.3	14.3
Max. Overcurrent Device (amps) ⁵	15	15	15	15	15	15	15	25
SHIP WEIGHT (LBS)	86	90	100	108	108	116	120	132

¹ Natural Gas BTU/h; for altitudes 0-4500' above sea level, reduce input rating by 4% for each 1000' above 4500' altitude.

² DOE AFUE based upon Isolated Combustion System (ICS)

³ Vent and combustion air diameters may vary depending upon vent length. Refer to the latest editions of the National Fuel Gas Code NFPA 54/ANSI Z223.1 (in the USA) and the Canada National Standard of Canada, CAN/CSA B149.1 and CAN/CSA B142.2 (in Canada).

⁴ Minimum Circuit Ampacity = (1.25 x Circulator Blower Amps) + ID Blower amps. Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.

⁵ Maximum Overcurrent Protection Device refers to maximum recommended fuse or circuit breaker size. May use fuses or HACR-type circuit breakers of the same size as noted.

NOTES

- All furnaces are manufactured for use on 115 VAC, 60 Hz, single-phase electrical supply.
- Gas Service Connection ½" FPT
- Important: Size fuses and wires properly and make electrical connections in accordance with the National Electrical Code and/or all existing local codes.

	DD80SN 0403A*A	DD80SN 0603A*A	DD80SN 0804B*A	DD80SN 1005C*A
HEATING CAPACITY				
Input ¹	40,000	60,000	80,000	100,000
Natural Gas Output ¹	32,000	48,000	64,000	80,000
LP Gas Output ¹	32,000	48,000	64,000	80,000
AFUE ²	80	80	80	80
Available AC @ 0.5" ESP	3	3	4	5
Temperature Rise Range (°F)	25 - 55	30-60	35-65	40 - 70
CIRCULATOR BLOWER				
Size (D x W)	10" x 6"	10" x 6"	10" x 8"	10" x 10"
Horsepower @1075 RPM	½	½	¾	1
No. of Speeds	9	9	9	9
Vent Diameter ³	4"	4"	4"	4"
No. of Burners	2	3	4	5
ELECTRICAL DATA				
Min. Circuit Ampacity ⁴	7.7	7.7	11.30	14.3
Max. Overcurrent Device (amps) ⁵	15	15	15	25
SHIP WEIGHT (LBS)	90	94	107	115

¹ Natural Gas BTU/h; for altitudes 0-4500' above sea level, reduce input rating by 4% for each 1000' above 4500' altitude.

² DOE AFUE based upon Isolated Combustion System (ICS)


³ Vent and combustion air diameters may vary depending upon vent length. Refer to the latest editions of the National Fuel Gas Code NFPA 54/ANSI Z223.1 (in the USA) and the Canada National Standard of Canada, CAN/CSA B149.1 and CAN/CSA B142.2 (in Canada).

⁴ Minimum Circuit Ampacity = (1.25 x Circulator Blower Amps) + ID Blower amps. Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.

⁵ Maximum Overcurrent Protection Device refers to maximum recommended fuse or circuit breaker size. May use fuses or HACR-type circuit breakers of the same size as noted.

NOTES

- All furnaces are manufactured for use on 115 VAC, 60 Hz, single-phase electrical supply.
- Gas Service Connection ½" FPT
- Important: Size fuses and wires properly and make electrical connections in accordance with the National Electrical Code and/or all existing local codes.

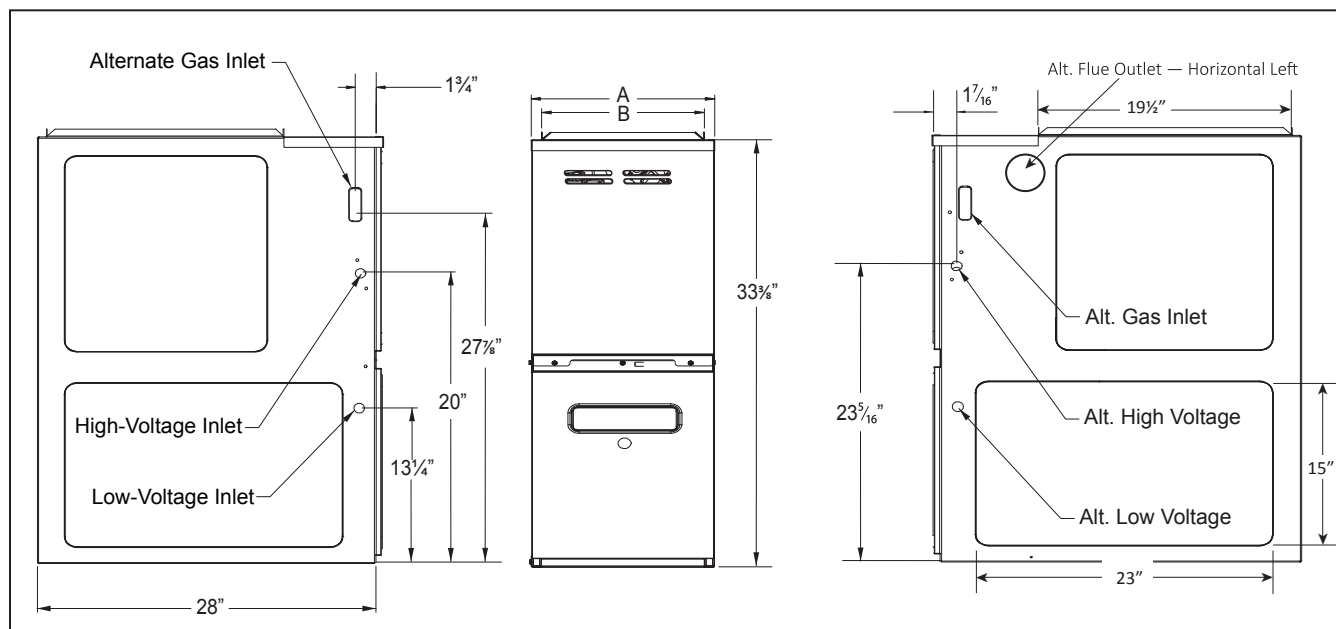

MODEL	A	B
DR80SN0403A*A	14"	12 1/2"
DR80SN0603A*A	14"	12 1/2"
DR80SN0604B*A	17 1/2"	16"
DR80SN0804B*A	17 1/2"	16"

MODEL	A	B
DR80SN0805C*A	21"	19 1/2"
DR80SN1005C*A	21"	19 1/2"
DR80SN1205D*A	24 1/2"	23"

NOTES

- Line voltage wiring can enter through the right or left side of furnace.
Low-voltage wiring can enter through the right or left side of furnace.
- Conversion kits for high-altitude (5500+ ft) natural gas operation are available.
- Installer must supply the following gas line fittings, according to which entrance is used:
Left: One 90° street elbow; one 2 1/2" pipe nipple; one 90° elbow; straight pipe; one ground joint union
Right: Straight pipe to reach gas valve


MINIMUM CLEARANCES TO COMBUSTIBLE MATERIALS

SIDES	REAR	FRONT	BOTTOM	VENT		TOP
				SW	B	
1"	0"	3"	C	6"	1"	1"

C = If placed on combustible floor, the floor MUST be wood ONLY.

NOTES

- For servicing or cleaning, a 24" front clearance is recommended.
- Unit connections (electrical, flue, and drain) may necessitate greater clearances than the minimum clearances listed above.
- In all cases, accessibility clearance must take precedence over clearances from the enclosure where accessibility clearances are greater.
- Refer to the appropriate USA and Canadian codes:
 - In the USA: the National Fuel Gas Code NFPA 54 / ANSI Z223.1
 - In Canada: the Canada National Standard of Canada, CAN/CSA B149.1 and CAN/CSA B142.2

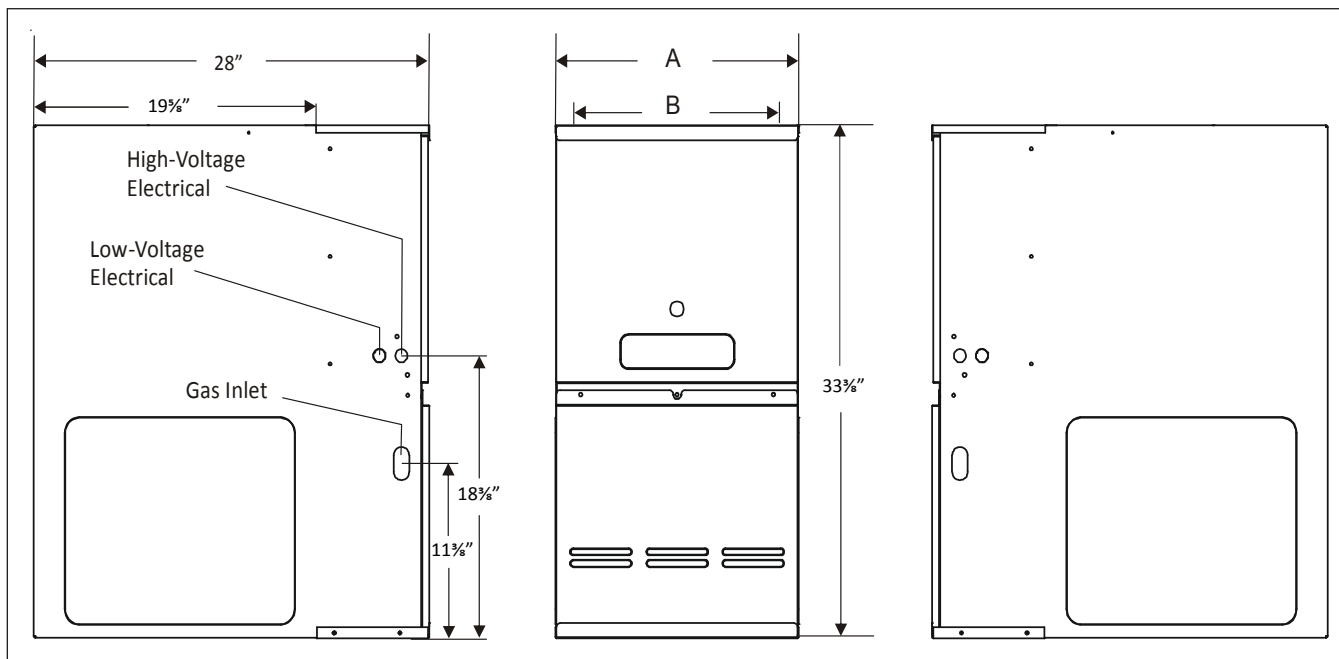

MODEL	A	B
DD80SN0403A*A	14"	12½"
DD80SN0603A*A	14"	12½"
DD80SN0804B*A	17½"	16"
DD80SN1005C*A	21"	19½"

NOTES

- Line voltage wiring can enter through the right or left side of furnace. Low-voltage wiring can enter through the right or left side of furnace.
- Conversion kits for high-altitude (4500+ Ft.) natural gas operation are available. Contact your Daikin distributor or dealer for details.
- Installer must supply the following gas line fittings, according to which entrance is used: Left: One 90° street elbow; one 2½" pipe nipple; one 90° elbow; straight pipe; one ground joint union Right: Straight pipe to reach gas valve

MINIMUM CLEARANCES TO COMBUSTIBLE MATERIALS

SIDES	REAR	FRONT ¹	VENT ²		TOP
			SW	B	
1"	0"	3"	6"	1"	1"

¹ 24" clearance for serviceability recommended.

² Single Wall Vent (SW) to be used only as a connector. Refer to the latest editions of the National Fuel Gas Code NFPA 54/ ANSI Z223.1 (in the USA) and the Canada National Standard of Canada, CAN/CSA B149.1 and CAN/CSA B142.2 (in Canada).

MODEL	THERMOSTAT CALL	TAP #	EXTERNAL STATIC PRESSURE (INCHES WATER COLUMN)											
			0.1	0.2	0.3	0.4	0.5		0.6		0.7		0.8	
			CFM	CFM	CFM	CFM	CFM	Watts	CFM	Watts	CFM	Watts	CFM	Watts
DR80SN 0403A*	Y/Y1, Y2, G	F01	658	585	545	495	444	83	390	88	332	94	151	49
		F02	749	697	652	607	554	102	509	108	459	113	406	120
		F03	925	881	840	800	760	150	721	157	681	162	645	169
		F04^	882	841	800	760	719	138	678	144	641	151	602	157
		F05	1330	1295	1273	1251	1223	358	1195	366	1168	375	1142	385
		F06	1130	1090	1059	1022	991	230	957	237	926	246	895	255
		F07	1158	1113	1090	1057	1024	247	996	258	964	264	935	271
		F08	1270	1235	1208	1179	1147	304	1119	312	1088	322	1060	329
		F09	1417	1380	1359	1336	1314	408	1288	419	1261	430	1238	440
DR80SN 0603A*	Y/Y1, Y2, G	F01	659	599	542	490	437	89	383	95	320	102	N/A	N/A
		F02	1268	1221	1188	1154	1122	336	1091	344	1060	353	1029	361
		F03	1087	1044	1008	973	938	234	905	242	871	249	841	257
		F04^	1118	1070	1033	997	963	243	929	251	896	260	865	267
		F05	1308	1262	1224	1197	1167	332	1141	341	1117	352	1089	361
		F06	868	823	780	741	699	148	662	154	624	160	584	167
		F07	922	877	835	795	757	165	718	173	679	180	642	187
		F08	1382	1341	1311	1291	1263	435	1234	443	1206	453	1177	464
		F09	1492	1448	1409	1381	1354	460	1332	470	1310	481	1288	491
DR80SN 0604B*	Y/Y1, Y2, G	F01	764	695	630	559	485	95	415	102	358	109	N/A	N/A
		F02	1287	1235	1191	1147	1104	244	1062	252	1020	263	979	272
		F03	1339	1301	1258	1217	1174	270	1131	279	1090	289	1048	299
		F04^	1396	1346	1298	1257	1217	289	1175	299	1135	308	1098	319
		F05	1185	1135	1088	1040	992	203	947	211	901	219	855	227
		F06	1500	1460	1420	1360	1380	337	1294	353	1256	365	1219	380
		F07	1591	1539	1493	1454	1416	391	1379	402	1347	412	1311	424
		F08	1675	1622	1583	1545	1510	447	1474	459	1440	473	1402	482
		F09	1790	1741	1701	1668	1631	531	1599	546	1567	560	1532	570
DR80SN 0803B*	Y/Y1, Y2, G	F01	710	646	580	515	432	79	367	85	314	90	274	95
		F02	1298	1255	1216	1178	1140	242	1102	253	1067	263	1028	273
		F03	1209	1166	1124	1083	1045	208	1005	217	964	227	923	236
		F04^	1138	1091	1045	1001	959	181	920	188	876	197	832	208
		F05	1391	1352	1314	1278	1241	288	1209	298	1175	311	1140	242
		F06	977	931	880	836	785	135	734	142	683	151	626	158
		F07	1036	985	940	895	848	150	799	158	751	167	705	175
		F08	1456	1414	1376	1341	1302	315	1270	327	1238	337	1200	352
		F09	1533	1488	1452	1415	1383	360	1350	370	1317	381	1286	393
DR80SN 0804B*	Y/Y1, Y2, G	F01	841	657	595	522	439	90	367	97	315	102	N/A	N/A
		F02	1141	1089	1045	1001	958	192	914	200	869	207	823	214
		F03	1311	1267	1226	1189	1150	253	1114	264	1072	275	1034	283
		F04^	1395	1347	1309	1270	1233	291	1199	302	1164	312	1125	323
		F05	1490	1447	1407	1373	1336	339	1303	351	1269	360	1237	373
		F06	1553	1510	1469	1435	1401	372	1368	384	1335	395	1300	408
		F07	1593	1548	1508	1474	1440	392	1409	405	1376	415	1343	429
		F08	1776	1735	1695	1661	1628	514	1601	529	1570	542	1542	555
		F09	1853	1812	1773	1739	1708	569	1679	585	1650	599	1623	614

See Note on page 8

DR80SN AIRFLOW DATA – FAN AND COOLING AIRFLOW (CONT.)

MODEL	THERMOSTAT CALL	TAP #	EXTERNAL STATIC PRESSURE (INCHES WATER COLUMN)											
			0.1	0.2	0.3	0.4	0.5		0.6		0.7		0.8	
			CFM	CFM	CFM	CFM	CFM	Watts	CFM	Watts	CFM	Watts	CFM	Watts
DR80SN 0805C*	Y/Y1, Y2, G	F01	837	752	671	576	501	100	426	107	361	113	315	119
		F02	1316	1270	1218	1166	1114	217	1061	227	1000	238	962	251
		F03	1353	1323	1286	1235	1183	242	1131	253	1085	263	1040	275
		F04^	1587	1544	1506	1459	1416	333	1372	345	1323	358	1281	369
		F05	1731	1673	1632	1587	1546	398	1506	414	1463	426	1421	440
		F06	1794	1744	1709	1671	1632	444	1591	459	1555	474	1513	489
		F07	1861	1805	1761	1720	1681	481	1642	496	1603	509	1565	524
		F08	1910	1873	1839	1798	1761	525	1723	545	1686	559	1648	574
		F09	2110	2055	2035	2003	1973	700	1946	724	1907	731	1890	750
DR80SN 1005C*	Y/Y1, Y2, G	F01	802	724	637	551	468	87	389	95	342	100	294	106
		F02	1405	1356	1308	1262	1210	241	1182	0	1155	252	1102	264
		F03	1574	1531	1484	1440	1392	320	1357	331	1306	342	1256	355
		F04^	1619	1575	1526	1489	1446	336	1404	352	1355	361	1313	374
		F05	1688	1641	1600	1557	1513	367	1477	383	1428	398	1381	405
		F06	1811	1769	1730	1686	1649	443	1610	456	1572	468	1525	482
		F07	1857	1812	1774	1733	1697	475	1662	489	1622	505	1586	518
		F08	1892	1850	1805	1774	1735	496	1692	511	1658	523	1621	537
		F09	2116	2073	2039	2005	1981	675	1945	688	1909	707	1879	728
DR80SN 1205D*	Y/Y1, Y2, G	F01	851	774	692	615	535	105	470	111	411	118	359	124
		F02	1677	1629	1583	1540	1498	408	1449	422	1399	436	1349	450
		F03	1537	1489	1444	1404	1365	335	1322	348	1272	360	1211	372
		F04^	1416	1365	1315	1267	1220	277	1163	285	1106	296	1048	306
		F05	1154	1098	1043	983	932	177	874	187	819	196	755	205
		F06	1806	1764	1729	1688	1654	489	1615	503	1578	519	1535	535
		F07	1869	1816	1773	1731	1693	521	1661	535	1629	548	1589	560
		F08	1947	1903	1865	1833	1802	604	1769	621	1743	640	1708	654
		F09	2107	2066	2030	1996	1963	734	1932	753	1899	772	1867	788

Note: ^ Default Speed

MODEL	THERMOSTAT CALL	TAP #	EXTERNAL STATIC PRESSURE, (INCHES WATER COLUMN)												
			0.1		0.2		0.3		0.4		0.5		0.6	0.7	0.8
			CFM	RISE	CFM	RISE	CFM	RISE	CFM	RISE	CFM	RISE	CFM	CFM	CFM
DR80SN 0403A*	W/W1	F01^^	658	N/A	585	N/A	545	N/A	495	N/A	444	N/A	390	332	151
		F02^	749	40	697	42	652	45	607	49	554	53	509	459	406
		F03	925	32	881	34	840	35	800	37	760	39	721	681	645
		F04	882	34	841	35	800	37	760	39	719	41	678	641	602
DR80SN 0603A*	W/W1	F01^^	659	N/A	599	N/A	542	N/A	490	N/A	437	N/A	383	320	N/A
		F02^	1268	35	1221	36	1188	37	1154	38	1122	40	1091	1060	1029
		F03	1087	41	1044	43	1008	44	973	46	938	47	905	871	841
		F04	1118	40	1070	42	1033	43	997	45	963	46	929	896	865
DR80SN 0604B*	W/W1	F01^^	764	N/A	695	N/A	630	N/A	559	N/A	485	N/A	415	358	N/A
		F02^	1287	35	1235	36	1191	37	1147	39	1104	40	1062	1020	979
		F03	1339	33	1301	34	1258	35	1217	37	1174	38	1131	1090	1048
		F04	1396	32	1346	33	1298	34	1257	35	1217	37	1175	1135	1098
DR80SN 0803B*	W/W1	F01^^	710	N/A	646	N/A	580	N/A	515	N/A	432	N/A	367	314	274
		F02^	1298	46	1255	47	1216	49	1178	50	1140	52	1102	1067	1028
		F03	1209	49	1166	51	1124	53	1083	55	1045	57	1005	964	923
		F04	1138	52	1091	54	1045	57	1001	59	959	62	920	876	832
DR80SN 0804B*	W/W1	F01^^	841	N/A	657	N/A	595	N/A	522	N/A	439	N/A	367	315	N/A
		F02^	1141	52	1089	54	1045	57	1001	59	958	62	914	869	823
		F03	1311	45	1267	47	1226	48	1189	50	1150	52	1114	1072	1034
		F04	1395	42	1347	44	1309	45	1270	47	1233	48	1199	1164	1125
DR80SN 0805C*	W/W1	F01^^	837	N/A	752	N/A	671	N/A	576	N/A	501	N/A	426	361	315
		F02^	1316	45	1270	47	1218	49	1166	51	1114	53	1061	1000	962
		F03	1353	44	1323	45	1286	46	1235	48	1183	50	1131	1085	1040
		F04	1587	37	1544	38	1506	39	1459	41	1416	42	1372	1323	1281
DR80SN 1005C*	W/W1	F01^^	802	N/A	724	N/A	637	N/A	551	N/A	468	N/A	389	342	294
		F02^	1405	53	1356	55	1308	57	1262	59	1210	61	1155	1102	1057
		F03	1574	47	1531	48	1484	50	1440	51	1392	53	1357	1306	1256
		F04	1619	46	1575	47	1526	49	1489	50	1446	51	1404	1355	1313
DR80SN 1205D*	W/W1	F01^^	851	N/A	774	N/A	692	N/A	615	N/A	535	N/A	470	411	359
		F02^	1677	53	1629	55	1583	56	1540	58	1498	59	1449	1399	1349
		F03	1537	58	1489	60	1444	62	1404	63	1365	65	1322	1272	1211
		F04^^	1416	N/A	1365	N/A	1315	N/A	1267	N/A	1220	N/A	1163	1106	1048

Note:

^ Default Speed


^^Not recommended for heating


DD80SN AIRFLOW DATA – FAN AND COOLING AIRFLOW

MODEL	THERMOSTAT CALL	TAP #	EXTERNAL STATIC PRESSURE (INCHES WATER COLUMN)											
			0.1	0.2	0.3	0.4	0.5		0.6		0.7		0.8	
			CFM	CFM	CFM	CFM	CFM	Watts	CFM	Watts	CFM	Watts	CFM	Watts
DD80SN 0403AX	Y/Y1, Y2, G	F01	712	663	610	559	514	86	462	94	395	102	337	108
		F02	1120	1081	1053	1022	990	216	955	225	918	231	887	240
		F03	929	891	858	815	772	142	737	150	699	157	664	165
		F04^	1073	1031	1003	969	922	191	891	200	854	207	822	217
		F05	1212	1198	1161	1138	1103	262	1076	268	1037	280	1007	288
		F06	871	830	789	743	702	123	665	131	628	139	583	146
		F07	825	784	741	694	650	114	609	120	563	126	520	133
		F08	1274	1252	1220	1195	1169	298	1145	307	1110	315	1084	324
		F09	1362	1342	1307	1273	1252	353	1237	364	1211	378	1185	385
DD80SN 0603AX	Y/Y1, Y2, G	F01	706	655	604	555	505	87	455	92	395	98	328	105
		F02	1035	991	951	913	876	182	844	189	807	197	770	203
		F03	932	887	844	806	767	145	728	152	689	158	651	164
		F04^	897	851	808	764	725	134	686	140	646	146	603	151
		F05	1123	1077	1041	1006	973	218	941	227	907	235	875	242
		F06	1155	1113	1074	1039	1006	233	974	241	945	251	913	258
		F07	1255	1214	1181	1147	1116	286	1087	296	1056	304	1028	313
		F08	1388	1331	1298	1266	1235	355	1207	367	1179	375	1151	387
		F09	1421	1380	1348	1318	1289	390	1262	401	1233	411	1207	421
DD80SN 0804BX	Y/Y1, Y2, G	F01	760	697	636	569	481	86	402	92	349	98	300	103
		F02	1286	1238	1196	1157	1117	232	1077	240	1036	250	998	259
		F03	1393	1348	1308	1270	1230	277	1196	289	1158	295	1123	306
		F04^	1459	1414	1371	1336	1297	310	1264	321	1229	333	1193	342
		F05	1753	1713	1677	1642	1611	493	1576	508	1549	524	1518	533
		F06	1309	1261	1218	1182	1142	239	1103	248	1064	258	1025	268
		F07	1580	1534	1495	1459	1429	376	1390	388	1356	394	1324	409
		F08	1523	1483	1438	1403	1370	351	1336	355	1299	366	1266	377
		F09	1643	1599	1562	1525	1491	418	1462	430	1431	444	1394	450
DD80SN 1005CX	Y/Y1, Y2, G	F01	956	777	675	587	468	100	377	107	324	112	296	117
		F02	1460	1404	1350	1299	1251	252	1203	264	1150	276	1098	287
		F03	1561	1499	1441	1385	1336	290	1289	302	1243	314	1197	325
		F04^	1628	1571	1521	1472	1425	317	1380	331	1337	343	1291	356
		F05	1714	1659	1611	1564	1519	360	1473	371	1432	387	1387	397
		F06	1833	1784	1735	1688	1645	420	1605	436	1562	450	1520	462
		F07	1899	1853	1804	1761	1720	465	1681	479	1640	494	1602	510
		F08	1926	1894	1849	1807	1764	487	1720	497	1683	514	1642	527
		F09	2222	2174	2132	2090	2053	688	2013	702	1976	719	1944	737

NOTE: ^ Default Speed

MODEL	THERMOSTAT CALL	TAP #	EXTERNAL STATIC PRESSURE, (INCHES WATER COLUMN)												
			0.1		0.2		0.3		0.4		0.5		0.6	0.7	0.8
			CFM	RISE	CFM	RISE	CFM	RISE	CFM	RISE	CFM	RISE	CFM	CFM	CFM
DD80SN 0403AX	W/W1	F01^^	712	N/A	663	N/A	610	N/A	559	N/A	514	N/A	462	395	337
		F02^	1120	26	1081	27	1053	28	1022	29	990	30	955	918	887
		F03	929	32	891	33	858	35	815	36	772	38	737	699	664
		F04	1073	28	1031	29	1003	30	969	31	922	32	891	854	822
DD80SN 0603AX	W/W1	F01^^	706	N/A	655	N/A	604	N/A	555	N/A	505	N/A	455	395	328
		F02^	1035	43	991	45	951	47	913	49	876	51	844	807	770
		F03	932	48	887	50	844	53	806	55	767	58	728	689	651
		F04^^	897	N/A	851	N/A	808	N/A	764	N/A	725	N/A	686	646	603
DD80SN 0804BX	W/W1	F01^^	760	N/A	697	N/A	636	N/A	569	N/A	481	N/A	402	349	300
		F02^	1286	46	1238	48	1196	50	1157	51	1117	53	1077	1036	998
		F03	1393	43	1348	44	1308	45	1270	47	1230	48	1196	1158	1123
		F04	1459	41	1414	42	1371	43	1336	44	1297	46	1264	1229	1193
DD80SN 1005CX	W/W1	F01^^	956	N/A	777	N/A	675	N/A	587	N/A	468	N/A	377	324	296
		F02^	1460	51	1404	53	1350	55	1299	57	1251	59	1203	1150	1098
		F03	1561	47	1499	49	1441	51	1385	53	1336	55	1289	1243	1197
		F04	1628	46	1571	47	1521	49	1472	50	1425	52	1380	1337	1291

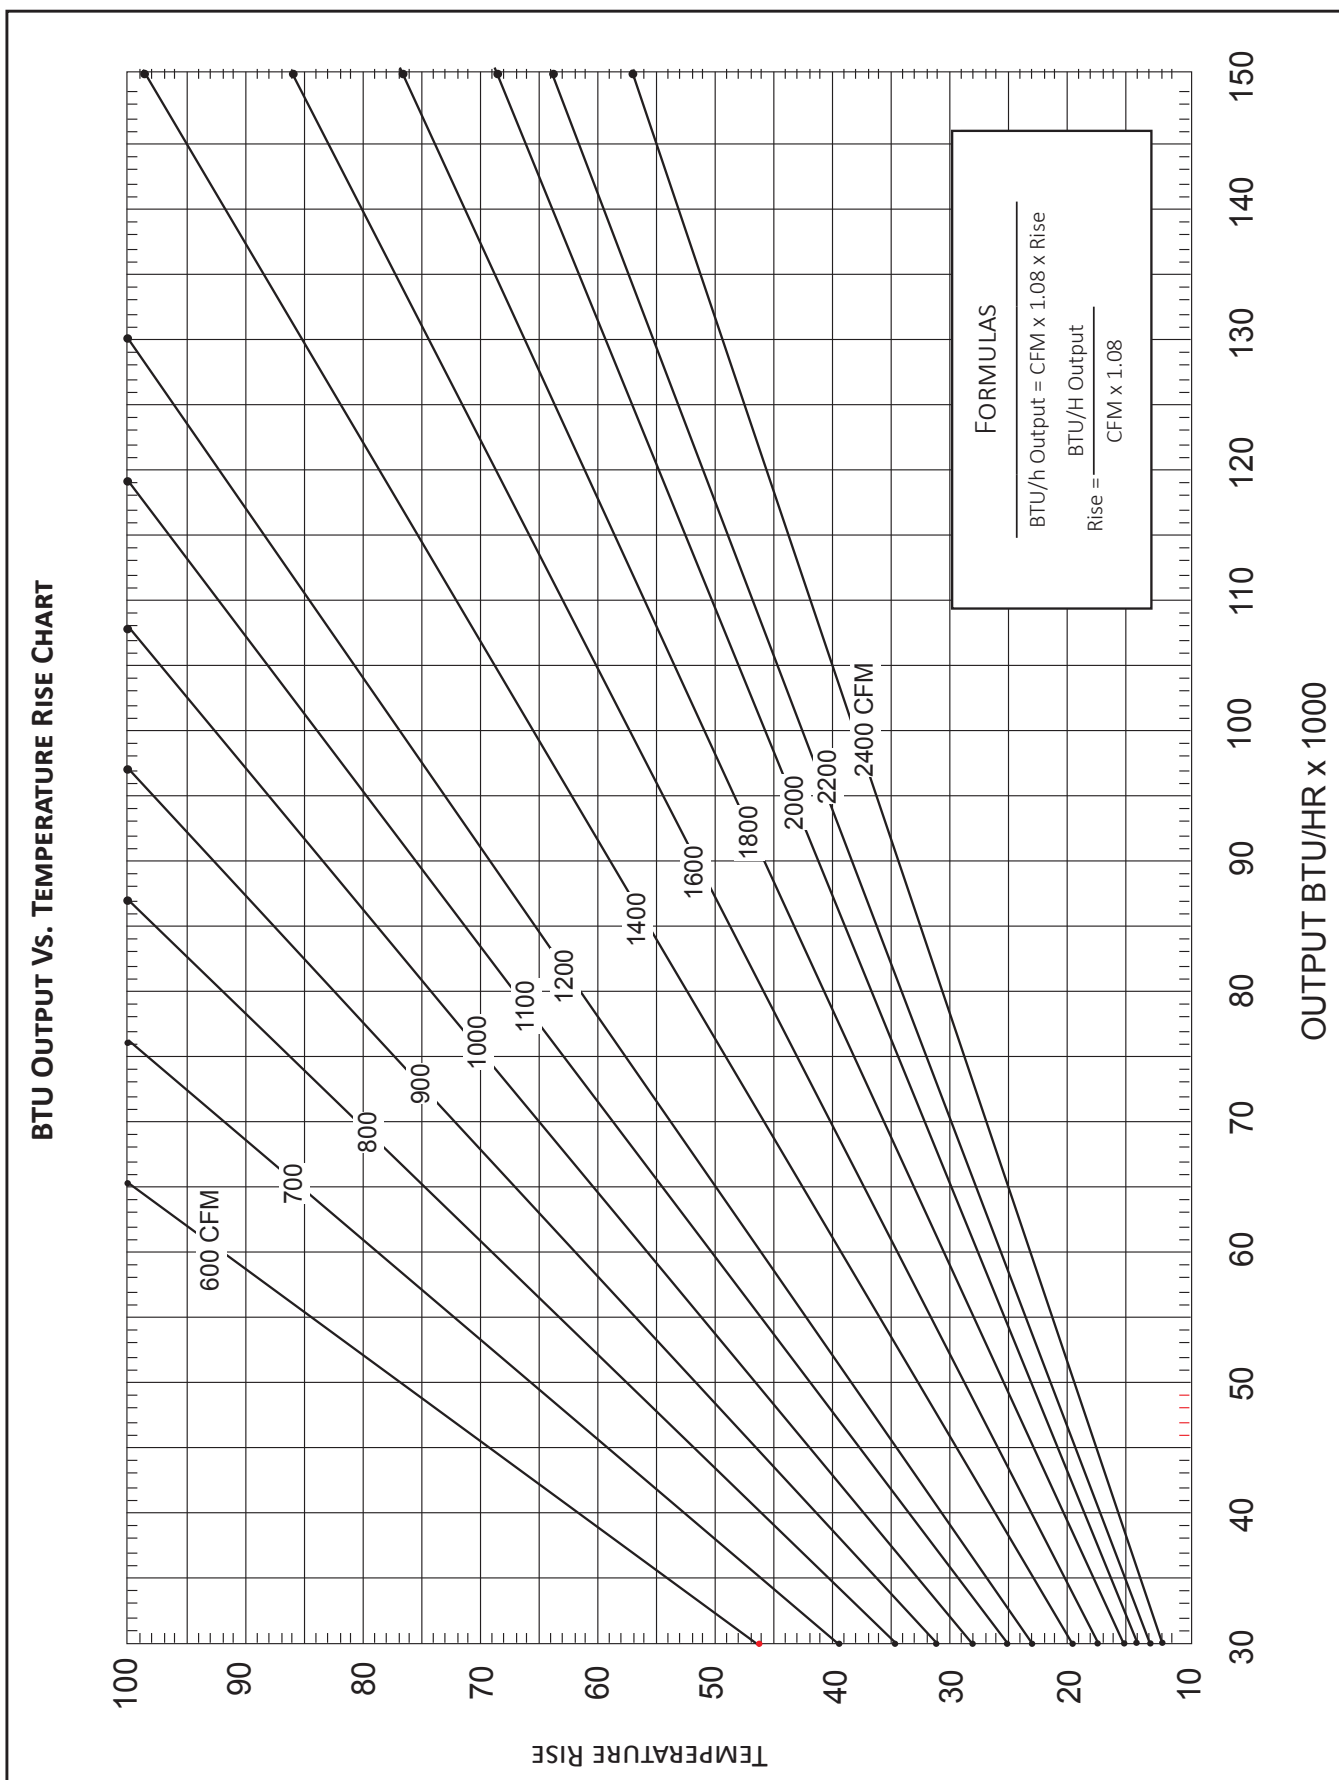

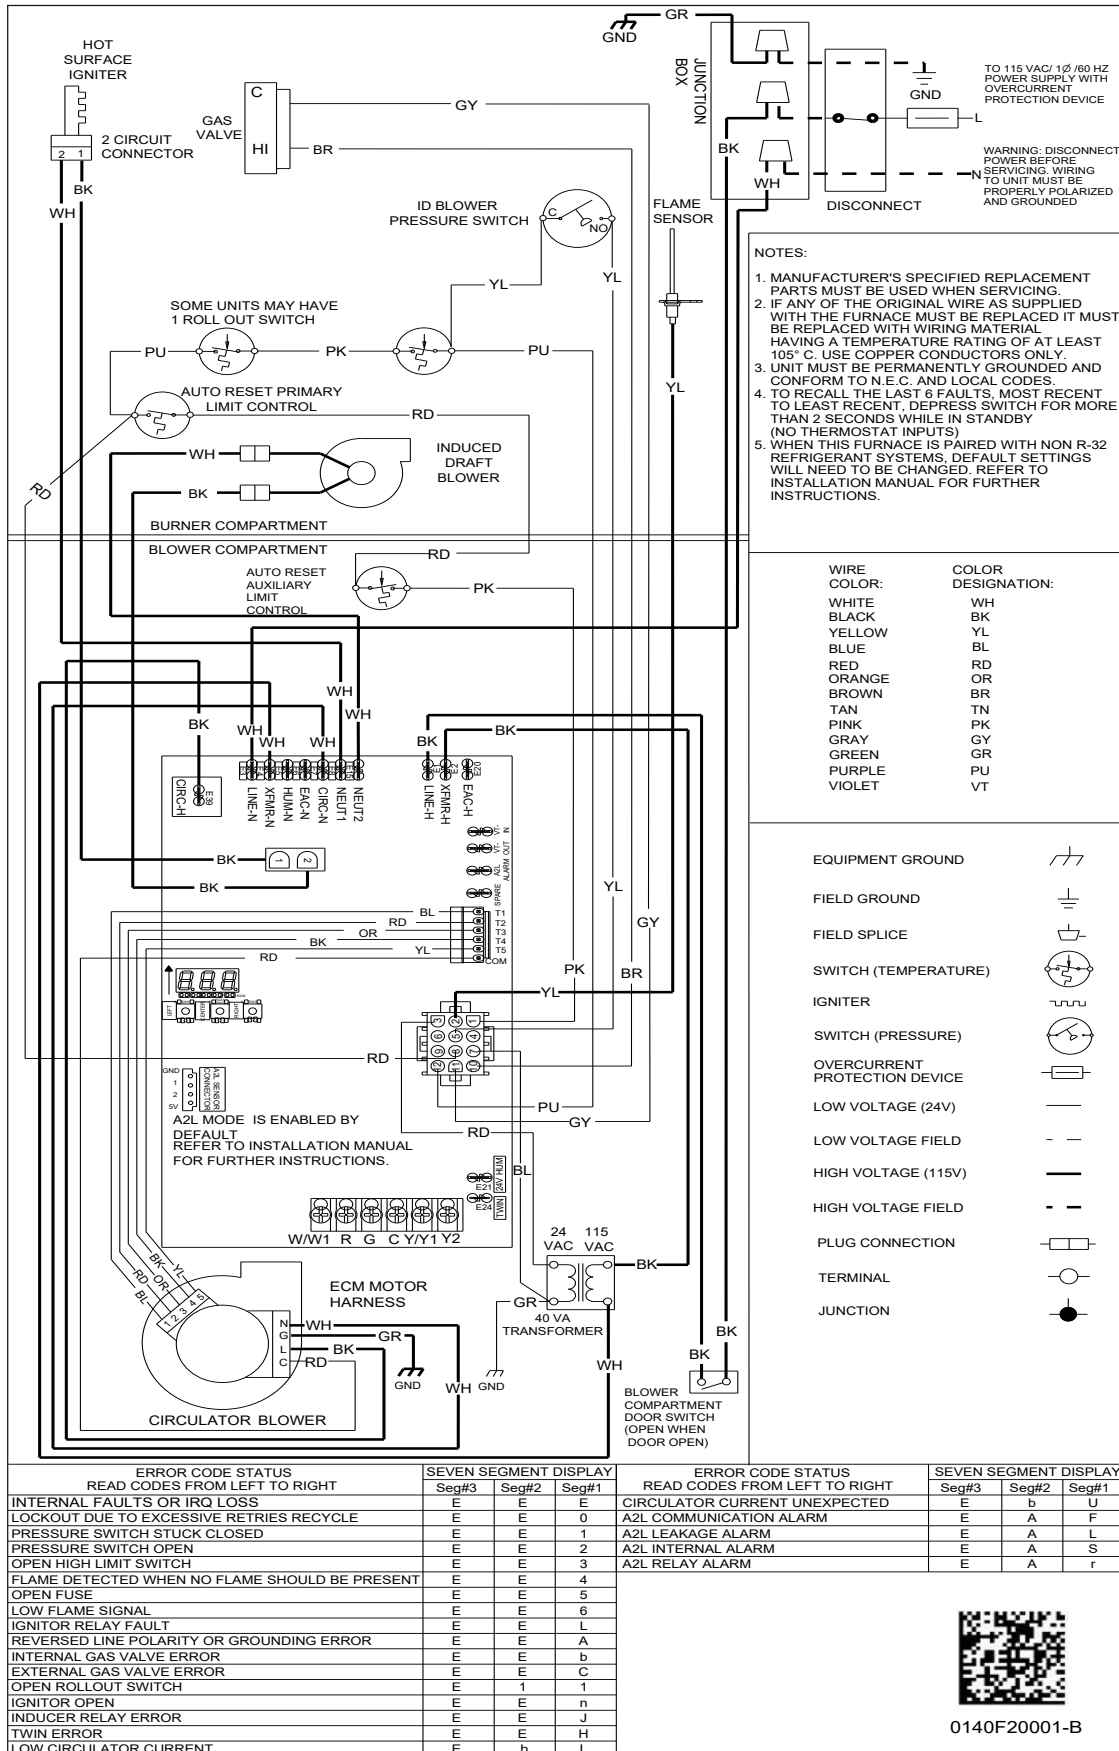

MODEL	DESCRIPTION	DR80SN 0403A	DR80SN 0603A*	DR80SN 0604B*	DR80SN 0803B*	DR80SN 0804B*	DR80SN 0805C*	DR80SN 1005C*	DR80SN 1205D*
AFE18-60A	Fossil Fuel (Dual Fuel) Kit	✓	✓	✓	✓	✓	✓	✓	✓
HANG20	High-Altitude Natural Gas Kit	✓	✓	✓	✓	✓	✓	✓	✓
LPM-31	LP Conversion Kits W/ LP Switch	✓	✓	✓	✓	✓	✓	✓	✓
MVK-01 ²	Masonry Vent Kit	✓	✓	✓	✓	✓	✓	✓	—
MVK-02 ²	Masonry Vent Kit (for 120k model only)	—	—	—	—	—	—	—	✓

² Upflow applications only

MODEL	DESCRIPTION	DD80SN 0403A*B	DD80SN 0603A*B	DD80SN 0804B*B	DD80SN 1005C*B
SBT14	Downflow Sub-Base 14"	✓	✓	—	—
SBT17	Downflow Sub-Base 17.5"	—	—	✓	—
SBT21	Downflow Sub-Base 21"	—	—	—	✓
AFE18-60A	Fossil Fuel (Dual Fuel) Kit	✓	✓	✓	✓
HANG20	High-Altitude Natural Gas Kit	✓	✓	✓	✓
LPM-31	LP Conversion Kits W/ LP Switch	✓	✓	✓	✓

DR80SN MINIMUM FILTER SIZES

MODEL #	DR80SN 0403A*	DR80SN 0603A*	DR80SN 0604B*	DR80SN 0804B*	DR80SN 0805C*	DR80SN 1005C*	DR80SN 1205D*
Filter Size (in ²)	(1) 16 x 25 (Side) or (1) 14 x 24 (Bottom)		(1) 16 x 25 (Side or Bottom)		(1) 16 x 25 (Side or Bottom) ¹	(2) 16 x 25 (Side) or (1) 20 x 25 (Bottom)	(2) 16 x 25 (Side) or (1) 24 x 24 (Bottom)

¹ Use 2 - 16 x 25 filters on side returns or 1 - 20 x 25 filter on bottom return if furnace is connected to a cooling unit over 4 tons nominal capacity.

Note: Other size filters of equal or greater surface area may be used; filters may also be centrally located.

DD80SN MINIMUM FILTER SIZES

MODEL #	DD80SN 0403A*	DD80SN 0603A*	DD80SN 0804B*	DD80SN 1005C*
Filter Size (in ²)	(2) 10 x 20 or (1) 14 x 25 (Top Return)		(2) 14 x 20 or (1) 16 x 25 (Top Return)	(2) 14 x 20 or (1) 20 x 25 (Top Return)

Note: Other size filters of equal or greater surface area may be used; filters may also be centrally located.

[illegible]

[illegible]